



Manual  
Bedienungsanleitung  
Manuel d'utilisation  
Manuale  
Manual de instrucciones  
取扱説明書  
الكتيب  
Manual de instruções  
Kullanım Kılavuzu

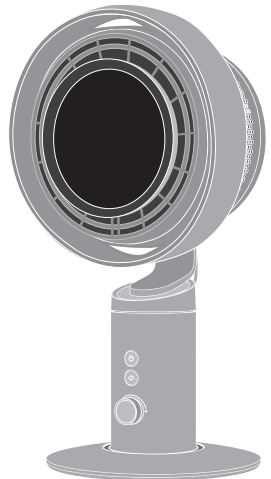


Table Fan Pro3 S

|           |       |
|-----------|-------|
| English   | 01~08 |
| Deutsche  | 09~15 |
| Français  | 16~22 |
| italiano  | 23~29 |
| español   | 30~36 |
| 日本語       | 37~43 |
| عربي      | 44~50 |
| Português | 51~57 |
| Türkçe    | 58~64 |

Please read this manual carefully before use. Be sure to use it in strict accordance with the requirements of the manual, and keep the manual properly for future use.

Bitte lesen Sie vor der Verwendung sorgfältig die Anleitung und verwenden Sie das Produkt gemäß den Anforderungen der Anleitung. Bewahren Sie die Anleitung zum späteren Nachschlagen.

Veuillez lire attentivement le manuel avant utilisation et utiliser le produit conformément aux instructions du manuel. Conservez le manuel pour référence ultérieure.

Si prega di leggere attentamente questo manuale prima dell'uso, utilizzare correttamente seguendo rigorosamente le istruzioni del manuale e conservare adeguatamente il manuale per uso futuro.


Antes de usar, lea cuidadosamente el manual y utilice el producto de acuerdo con las instrucciones del mismo. Guarde el manual para futuras consultas.

使用前にこの取扱説明書を注意深くお読みいただき、取扱説明書の要求事項に厳密に従って正しくご使用いただき、取扱説明書を適切に保存して後でご参照ください。

يرجى قراءة هذه التعليمات بعناية قبل استخدامها مع التقيد الدقيق باشتراطات التعليمات، والاحتفاظ بها على نحو ملائم لاستخدامها في وقت لاحق.

Antes de usar, leia atentamente este manual, use-o rigorosamente conforme as instruções e guarde-o bem para uso posterior.

Kullanmadan önce lütfen bu kılavuzu dikkatlice okuyun, kılavuzdaki talimatlara uygun olarak kullanın ve sonra kullanmak üzere kılavuzu iyi saklayın.

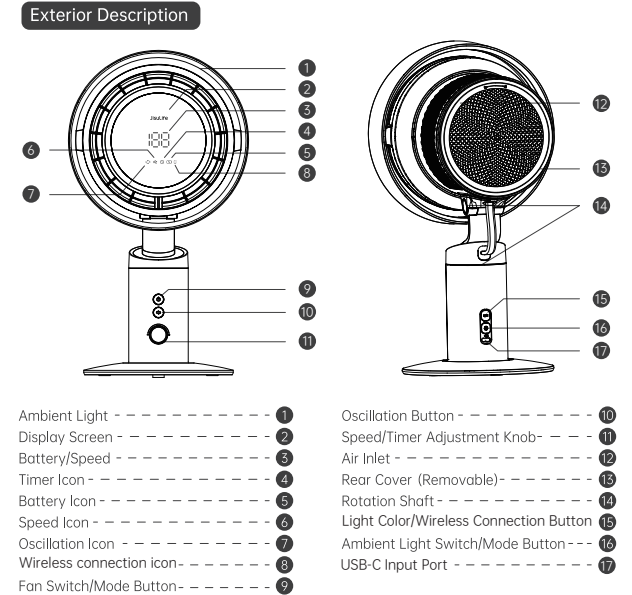

Precautions Before Use

- Please check the product and power cord for any damage and make sure they are in good condition and assemble them according to the instructions before powering them on.
- Before charging the product, please check whether the voltage of the power supply used is consistent with the product label.
- Please do not disassemble, modify or repair the product to avoid electric shock and fire accidents, and ask the service station designated by the original seller or manufacturer for repair.

Usage Instructions

**A. Fan Switch/Mode Switching and Speed Adjustment**  
Short press the power button to turn on the fan, activating the fan's last working memory state; Double-click the power button to enable/disable the natural wind mode; Rotate the speed control knob left or right to adjust the wind speed (speed can be adjusted between 1 and 100); Press the power button again briefly to turn off (while remembering the speed level, ambient light, and oscillation function status before shutdown).  
**Explanation of Natural Wind Mode:** The wind strength cycles between slightly strong and slightly weak winds, adjusting with the increase or decrease of the speed level.

**B. Timer Function**  
With the fan on, long-press the power button to activate the timer adjustment function. Rotate the speed control knob left or right to adjust the timer duration, ranging from 0 to 24

hours. When set to 0 hours, the timer function is off, and 24 hours is the maximum timer duration.

**C. Wireless Connection Function**  
When the fan is on, press and hold (1.5s) the light color/wireless connection button to turn the wireless connection on/off, and press and hold (5s) to clear paired devices.

**D. Swing Function**  
When the fan is on, short press the swing button to cycle through 45°, 90°, 120°, and off (return to the initial position); If the fan is turned off during the swing, the swing will return to the initial position; press and hold to directly turn off the swing function and stop at the current position; if the fan is turned off at this point, the swing will stop at the current position.

**E. Ambient Light Switch/Mode Switching and Color Adjustment**  
Ambient Light On/Mode Button-Short press to cycle through Constant On, Breathing, Color Gradient, and Off modes; long press to turn off the ambient light directly in any state.  
Ambient Light Color Button/When the light is in Constant On or Breathing mode, short press to cycle through colors.


**F. Check Battery/Turn Screen Display On/Off**  
Double-click the light color/wireless connection button to turn off the current screen display, allowing the fan to run normally; double-click again to restore the screen display. Double-click the swing button to display the current battery percentage.

G. Display Screen Status Explanation


| Operation/Status             | Screen Display Content                                                                                                                                                                                                                                                                                                                  |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power On                     | In any mode, the "JisuLife" icon remains lit, simultaneously displaying icons corresponding to the activated functions.                                                                                                                                                                                                                 |
| Turn on operation            | Display the current battery percentage and battery icon, while hiding the rest; after 5 seconds, switch to display the current fan speed level.                                                                                                                                                                                         |
| Adjust fan speed             | Adjust to display the fan speed level.                                                                                                                                                                                                                                                                                                  |
| Normal wind mode             | The fan speed icon remains lit.                                                                                                                                                                                                                                                                                                         |
| Natural wind mode            | The fan speed icon pulses.                                                                                                                                                                                                                                                                                                              |
| Adjust timer function        | According to the adjustment, display the timer setting, and let the timer icon blink while hiding the rest; if there is no operation for 5 seconds, switch to displaying the fan speed, with the timer icon remaining lit.                                                                                                              |
| Adjust oscillation function  | According to the adjustment, display the oscillation angle, and keep the oscillation icon lit while hiding the rest; if there is no operation for 5 seconds, switch to displaying the fan speed, with the oscillation icon remaining lit.                                                                                               |
| Turn on/adjust ambient light | In the power-off state, "JisuLife" remains lit, while the rest are not displayed.                                                                                                                                                                                                                                                       |
| Check battery level          | In the power-on state: Display the battery percentage, with the battery icon lit, while hiding the rest; if there is no operation for 5 seconds, switch to displaying the fan speed.<br>In the power-off state: Display the battery percentage, with the battery icon lit, while hiding the rest; after 5 seconds, the screen goes off. |

|                             |                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Low battery (<10%)          | In the power-on state: When displaying the fan speed, let the battery icon blink; when checking the battery level, let the battery percentage blink, while keeping the battery icon lit, and hiding the rest.<br>In the power-off state: If checking the battery level, let the battery percentage blink, keep the battery icon lit, and hide the rest. |
| Insufficient power to start | Press any button, display "0" blinking three times to shut down, then turn off the display, and the fan does not start. (If in charging state, with battery at 0%, the fan can start.)                                                                                                                                                                  |
| Charging                    | In the power-on state: When displaying the fan speed, let the battery icon breathe in blue.<br>In the power-off state: Let the digit of the battery percentage blink, keep the battery icon and "JisuLife" lit, and hide the rest.                                                                                                                      |
| Fully charged               | In the power-on state: When displaying the fan speed, let the battery icon remain lit in white.<br>In the power-off state: Keep "100" lit, along with the battery icon and "JisuLife", while hiding the rest.                                                                                                                                           |
| Turn Off Screen Display     | The screen turns off, and the fan runs normally; if the fan function is adjusted, the screen will light up for 10s and turn off again after no operation.                                                                                                                                                                                               |


**H. Angle Adjustment**  
Vertical Rotation: The fan can be manually rotated up and down by 45°. Horizontal Rotation: The fan can be manually rotated left and right by 120°, or the auto-oscillation can be adjusted by pressing the oscillation button briefly.

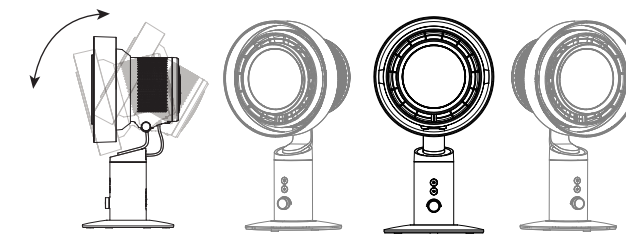


**I. How to clean**  
**Removing the Air Purification Filter**  
Switch off the machine and when the fan stops running, unscrew the screws at the bottom of the back cover, rotate the back cover counterclockwise and remove it, and then take out the air purifying filter.

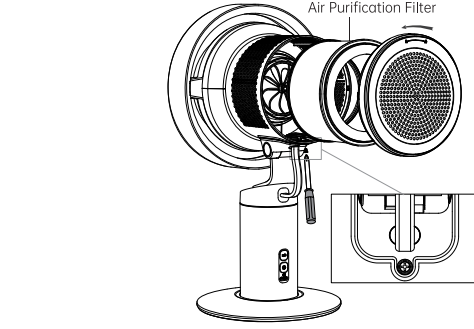

- Product Cleaning**
- Before cleaning the product, make sure the power supply is disconnected.
  - The back cover can be cleaned with water, and the fan blade and mask can be wiped with a clean rag. After cleaning the back cover and fan blade, please leave them until they are completely dry before installing and using them.
  - Prohibit cleaning of electrical parts (e.g., motors, power switches, etc.) with water or other liquids.
  - Do not touch the power supply and electrical parts with wet hands or rags.

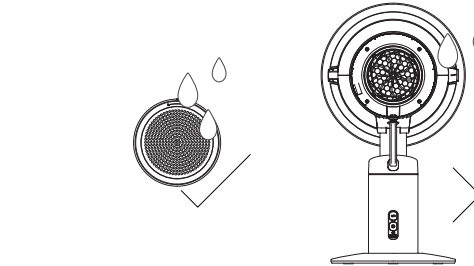


**Installing Air Purification Filter**  
Place the air purification filter inside the rear grille, secure it, and rotate it clockwise. Then, screw the screw at the bottom of the cover.  
The air purification filter cannot be cleaned and reused. Please replace it regularly, approximately every 2-3 months depending on usage.

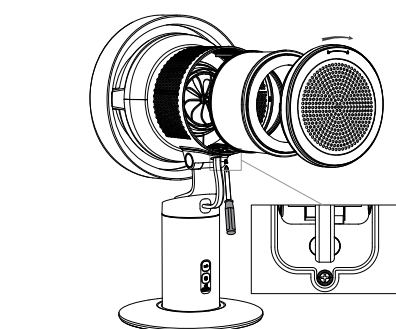

Removing the Battery

Before disposing of the product, the battery must be removed from the product. Before removing the battery, the product must be turned off. Dispose of the battery safely according to local regulations.

- Peel off the bottom sticker of the product, use a tool to remove the bottom screw, and remove the base;
- Disconnect the cable, remove the battery, and dispose of it safely according to local regulations.

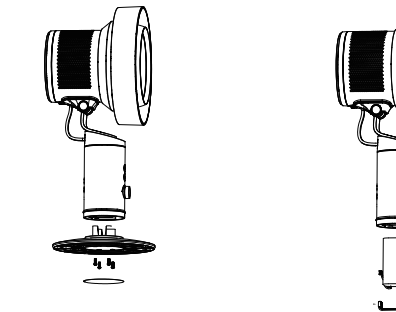

Safety Precautions

To ensure safe use and to prevent harm to yourself and others as well as property damage, please observe the following safety precautions. Failure to follow the safety warnings may result in accidents.

- This product is not a toy for children. Please ensure that infants and young children do not use this product as a toy. Children under 14 should use it under the supervision of an adult.
- This product is not intended for use by individuals (including children) with limited physical, sensory, or mental capabilities, unless they are supervised or instructed by someone responsible for their safety.
- Avoid blowing directly at the human body for a long time, especially the elderly and children, to prevent discomfort.
- Do not insert fingers, sharp objects, or metal items during use, as this may cause product malfunctions, electric shock, or injury.
- Do not plug or unplug the power with wet hands or wet towels to avoid electric shock.
- This product is not waterproof. Do not rinse the product directly with water or use it in bathrooms, places with heavy humidity, or where water is stored. If the surface is wet, please dry it promptly and let it dry before attempting to power it on. Do not use it again if it is completely soaked or has internal water.
- Do not cover the air outlet and air inlet with clothing, towels, fabrics, or other items to avoid product malfunctions.
- Do not use or store in high-temperature (above 60°C) environments and enclosed spaces, such as greenhouses, construction sites, stoves, or sun-exposed car interiors. This may cause plastic deformation, fire due to the spread of flames, battery explosions, and other malfunctions and accidents.
- Do not squeeze, disassemble the battery, or leave the battery in a high-temperature environment (above 60°C) for a long time, as this may cause leakage or explosion.
- If consumers use a power adapter for charging, the input voltage and current of the power adapter should be within the range of 5.0V~ 2.0A/9.0V~ 2.0A/12.0V~ 1.5A, and it should obtain mandatory safety certification from the country to be used.
- This product uses a lithium-ion battery without memory function. Overcharging or over-discharging will affect the service life of the product. Please disconnect the power after timely charging and full battery, and if not used for a long time (more than 3 months), please fully charge it.
- If there is smoke, fire, or other malfunctions during use, please immediately turn off the power and stop using it. Send it to the dealer or manufacturer for handling and do not disassemble it yourself to avoid danger.
- When charging, do not bend or pull the power cord to avoid poor contact.
- It is not recommended to use the product on airplanes, including charging it or turning it on.

Product Specifications

Brand: JisuLife  
Product Name: Table Fan Pro3 S  
Model: Table Fan Pro3 S  
Input: 5.0V~ 2.0A/9.0V~ 2.0A/12.0V~ 1.5A  
Cell Capacity: 2500mAh\*4pcs (10000mAh)  
Battery Capacity: 2500mAh( 36.9Wh 14.6V )  
Battery Cell: Lithium-ion Battery  
Charging Time: 5-6h (5.0V~ 2.0A) / 2-3-5-5h (18W fast charging)  
Working Time: 2-15h (depending on different modes/usage scenarios)  
Product Weight: Approximately 1385g  
Product Dimensions: 185×172×55mm

Note: When using 5.0V~ 2.0A input power for charging while using, the fan can only be turned on to level 50; when using input power above 9.0V~ 2.0A, it can be turned on to level 100 while charging.

To ensure battery safety, the product has temperature protection features:  
1. Charging temperature protection Charging is paused when the temperature is below 0°C or above 45°C, and resumes automatically once the temperature returns to normal.  
2. Working (discharge) temperature protection When the temperature is below -20°C or above 60°C, the product will display "H!" and automatically shut down after about 5 seconds. It needs to be manually restarted once the temperature returns to normal.

Package Contents

- Table Fan Pro3 S\*1  
Air Purification Filter \* 1  
USB-C Charging Cable \* 1  
User Manual \* 1  
Screwdriver \* 1

The content of this manual and the technical specifications of the product are subject to change without prior notice.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
- This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Manufacturer: Shenzhen Jisu Technology Co., Ltd.  
Address: Room 2707-2710, Building 4, Phase II, Tianan Yungu Industrial Park, Gangtou Community, Bantian Street, Longgang District, Shenzhen 518000, CN  
Web: http://jisulife.com  
China Domestic Tel: 400-011-8812