
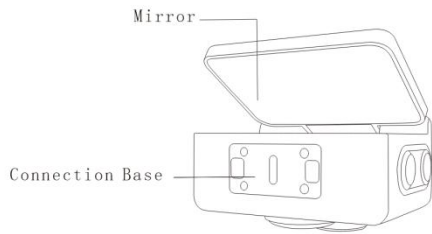



Guimeet G05 User Manual

I. Product Overview

1.1 Expansion Dock

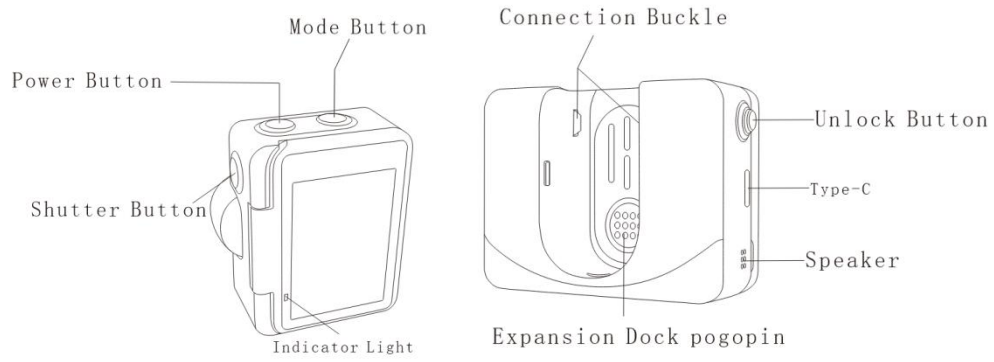

1.2 Main Unit

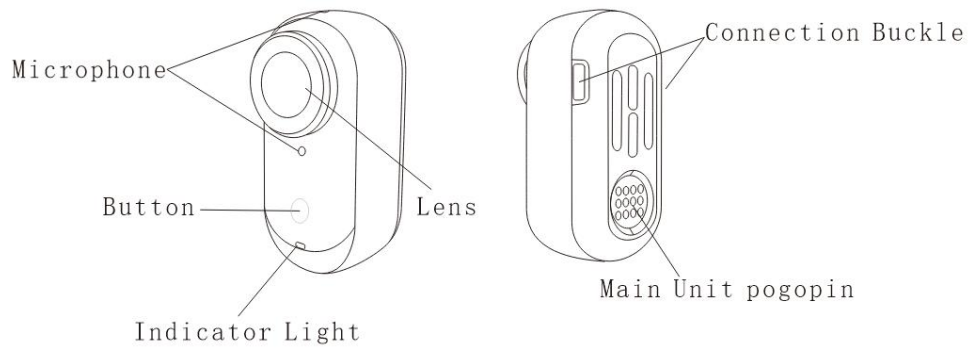

II. User Instructions

2.1 First Use

Charging and Power On

Connect the included fast charging cable to the USB-C port of the G05 Expansion Dock and a USB-C charger. When charging in the off state, the status indicator of the expansion dock glows red during charging and turns green when fully charged.

It takes 47 minutes to charge to 80% battery and approximately 65 minutes for a full charge.

Charging Reminder: Peel off the sticker on the back of the G05 main unit to ensure the charging contacts are clean before placing it into the expansion dock for charging.

G05 Main Unit Charging Time: 23 minutes to 80%, 35 minutes to 100%

Expansion Dock Charging Time: 47 minutes to 80%, 65 minutes to 100%

Place the G05 main unit into the expansion dock and connect the charging cable to the dock. The indicator lights of both the G05 main unit and the expansion dock stay solid red during charging and turn off when the corresponding module is fully charged. The device is generally fully charged when all lights are off.

Note: It is recommended to use a dedicated charger to charge the G05. Connecting to a computer's USB port or other power banks may result in insufficient power supply, making it impossible to charge the G05 main unit and expansion dock simultaneously.

2.2 Button Functions of the Expansion Dock

Power Button

Short press: - Turn off and lock the touch screen when it is on.

Turn on and unlock the touch screen when it is off.

Long press for 1 second: Power on (the expansion dock and main unit power on synchronously)

Long press for 3 seconds: Power off

Long press for 8 seconds: Forced power off

Shutter Button

Short press:

In the powered-on state: Take a photo or start/stop video recording when in the preview interface; return to the preview interface when in other interfaces.

In the powered-off state: Press the shutter button to quickly turn on the camera and start video recording.

Mode Button

Short press: Call up the preset or mode switching page; click again to cycle through the selected options.

*No function when short pressed during shooting.

2.3 Button Functions of the Main Unit

Buttons are inactive when the main unit is in the dock.

Short press: take a photo/start video recording when in the preview interface; stop video recording with a second short press in video mode. (No function when in other interfaces.)

Long press for 1 second: Power on

Long press for 3 seconds: Power off

Long press for 8 seconds: Forced power off

Long press for 10 seconds, release, then click once: Exit low-power mode

Tap: Take a photo or start/stop video recording

(When the App connects to the G05 for the first time, confirm the connection by tapping the shutter button or camera button.)

Note: Usage of the G05 main unit in and out of the dock

In-dock operation logic: Integrated action camera, all buttons of the G05 main unit are disabled.

Out-of-dock operation logic: Image transmission Bluetooth remote control + thumb action camera.

Note: When recording with the G05 out of the dock and using the expansion dock for remote preview, data is transmitted via Bluetooth, resulting in reduced video quality for preview. The actual clarity of the recorded video is subject to the recording parameters and is not affected by the shooting method.

2.4 Touch Screen Operation

After the camera is powered on, the touch screen displays the camera shooting interface by default, and the menu bar shows shooting mode, battery level, storage capacity and other information. Perform functional operations by tapping or sliding the touch screen.

Tap the screen: Hide/show information

Swipe down from the top edge: Enter the camera settings page

Swipe right from the left edge: Enter the album page

Swipe left from the right edge: Enter the shooting parameter settings page

Swipe up from the bottom edge: Enter the shooting mode switching page; slide left/right to switch modes, and the page will automatically return to the preview interface if there is no operation within 3 seconds.

III. Specifications

Category	Item	Specification Details
Specification	Product Name	Thumb Camera
	Product Model	Guimeet G0 5
	Input	5V= 3A
	Operating Temp	-10°C~40°C
	Charging Temp	0°C~60°C
	Bluetooth version	Bluetooth V5.3
	Wi-Fiversion	Wi-Fi5

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC RF Radiation Exposure and SAR Statements

The Thumb Camera has been tested for limbs worn Specific Absorption Rate(SAR) compliance. The FCC has established detailed SAR requirements and has established that these requirements. RF Exposure Information The radio module has been evaluated under FCC Bulletin C95.1 and IEEE 1528 and found to be compliant to RF Exposure from radio frequency devices. This model meets the applicable government requirements for exposure to radio frequency waves. The highest reported SAR level for usage near the limbs worn.

(FCC ID:2BVFR-GO5B) SAR level for usage near the body worn (0mm Gap) is 0.123W/kg and simultaneous transmission is 0.198W/kg.

(FCC ID:2BVFR-GO5C) SAR level for usage near the body worn (0mm Gap) is 0.146W/kg and simultaneous transmission is 0.212W/kg.