


Wireless Keyboard User Manual US

Thank you for choosing our product, please kindly read this manual carefully before use.

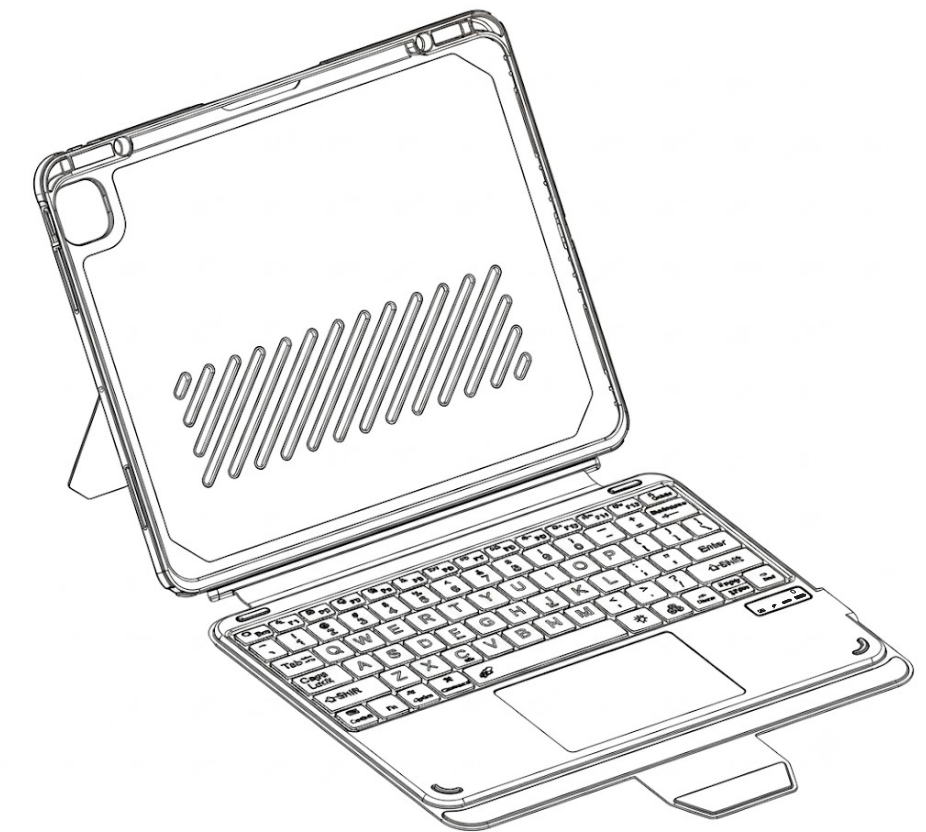

Product Specification

- | | |
|--|--|
| 1. Bluetooth Version: BT5.0 | 10. Standby Time: >90 days |
| 2. Bluetooth Distance: 32.8ft / 10m | 11. Charging Time: ≈2.5 hours |
| 3. Modulation System: GFSK | 12. Battery Capacity: 500mAh |
| 4. Operating Voltage: 3.0–4.2V5 | 13. Lithium Battery Life: >1 years |
| 5. Working Current: (No Backlight) <50mA | 14. Working Time: (Backlight) <4 hours |
| 6. Standby Current: <5mA | 15. Touch Strength: 120±30g |
| 7. Working Current: (Backlight) <120mA | 16. Key Strength: 80±10g |
| 8. Sleeping Current: <0.1mA | 17. Key Life: ≥3 Million times |
| 9. Charging Current: ≈250mA | 18. Operating Temperature: -10°C ~ +55°C |

Indicator Instruction

OFF/ON Power Switch: Slide switch ON/OFF to turn on or off the keyboard.

Power Indicator: When you slide the OFF/ON to On position, power indicator will light blue, then it goes off automatically after 5 seconds.
Tips: Power indicator will flash blue when the battery needs to be charged.

Pairing Indicator: Pairing indicator will flash blue when you press "Fn+C" button, ready for pairing with your tablet, it will go off automatically after connect successfully.

Charge Indicator: The Charge indicator will always light red while the keyboard is charging, and it will go out when the keyboard is fully charged.

Caps Lock Indicator: When caps lock indicator light blue, which means the keyboard is locked in capital letter.

If the Caps Lock isn't work?

Open Tablet Settings > General > Keyboard > Hardware Keyboard > Caps Lock Language Switch keyboard (turn it off)

Bluetooth Pairing Instruction

- Slide power switch ON/OFF to on position, power indicator light blue 5s then goes off.
 - Press "Fn+C" button, pairing indicator flashes.
 - Turn on the Bluetooth at your tablet Settings. Find the "Bluetooth Keyboard" and select it.
 - Tap pair when it shows Bluetooth Pairing Request. It will automatically connect the next time you use it.
- Note:** If there is no response, please forget the previous Bluetooth Keyboard device and restart the keyboard.

Backlight Adjustment

Manual change backlit color: Press the "Bulb" key to turn on the keyboard backlit. Then press the "RGB" key next to it to switch the color you like between 7 colors and click at a time to switch a color.

Seven-color light cycle mode: Press the "Bulb" key once to turn on the keyboard backlit, press twice to turn on the seven-color light cycle mode, press three times to turn off the backlit.

Adjust the brightness: Press the Fn + "Bulb" key to decrease or increase the brightness. 3 levels brightness: low, medium, high.

Hot Keys description

	Back to Home page		Search		Select all
	Copy		Paste		Cut
	Previous track		Pause/Play		Next track
	Volume-		Volume+		Brightness-
	Brightness+		Lock screen		Switch color
	On/light cycle mode/Off			Fn+ Touchpad on/off	

Switch Input Method

IOS: Control+Space

Fn+Control: Show/Hide Virtual Keyboard(IOS system only)

Note: Before using the keyboard, please switch input method and select the corresponding language.

Energy Saving Mode

The keyboard will automatically sleep if there is no operation within 10 minutes. When you type any key, it will be activated.

Low Battery Alert

Power indicator will flash blue when the keyboard needs to be charged, please charge it in time.

IOS System Touchpad Gestures

Single Finger Operation	
Single Finger Click Open App	Single Finger Movement Cursor sliding
Drag Tap and hold the item, then slide your finger on the trackpad to move it.	Open Control Center Move the pointer with single finger to select the status icon in the upper right, then tap.
Two Fingers Operation	
Two Fingers Up/Down Swipe Scroll up or down	Two Fingers Swipe Left/Right Scroll left or right
Two Fingers and Swipe Right Open Today view: When the home screen or lock screen is visible	Fingers Spread Out Enlarge
Pinch Two Fingers Inwards Shrink	Double Pointing Down Swipe Open Search from the main screen

Three Fingers Operation	
Swipe Up with Three Fingers Back to home screen	Swipe up three points, pause and lift your finger Open the APP switcher
Three fingers swipe left firstly, then swipe left and right to switch Switch between opening apps	

Tips

- Fn+Space: Turn on or turn off Trackpad.
- Operating System: IOS15.0 and above (the device must support touch)
- Touch Setting (after wireless BT pairing is successful): Settings → General → Trackpad → tap to click / two-finger auxiliary tap (open)
- Sensitivity Settings: Settings → General → Trackpad → Tracking Speed (adjust to the appropriate speed manually)

Please Note

- When you enter special keys, please press the Shift key + special key together. Such as @, please press Shift+@ at the same time.
- When the special character and symbol keys do not match what is coming up on the screen. Please Open Settings > General > Keyboard > Hardware Keyboard > Keyboard Type > ANSI (US), then restart and reconnect the keyboard to try it.
- When the letter and number keys do not match what is coming up on the screen. Please Open Settings > General > Keyboard > Keyboards > English (US) > QWERTY, then restart and reconnect the keyboard to try it.
- When double tap the space bar shows the period".", please Open Settings > General > Keyboard > "." Shortcut (turn it off)

Tips

- The first time using the keyboard, please charge the keyboard for at least 6 hours. Please charge it for at least 2 hours when the battery is run out of power.
- When the keyboard is not used for a long time, we suggest you turn off the keyboard to save battery.
- In order to extend battery life, we suggest you charge the keyboard when the power indicator is flashing.
- The connection distance between keyboard and iPad is within 32.8ft /10m.

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following twoconditions:
(1) This device may not cause harmful interference;
(2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by theparty responsible for compliance could void the user 's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device,pursuant to part 15 of the FCC Rules.These limits are designed to provide reasonable protection against harmful interference in a residential installation.This equipment generates,uses and can radiate radio frequency energy and,if not installed and used in accordance with the instructions,may cause harmful interference to radio communications. However,there is no guarantee that interference will not occur in a particlar installation.If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on,the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

