


**MoesGo**  
Smart Life Smart Switch

## Smart Light Switch User Manual



Support: service@moesgo.com  
Made in China

WORKS WITH Google Assistant    WORKS WITH Amazon Alexa

### Product Description

This new designed single pole smart switch is designed with WiFi to replace traditional switches with a variety of ways to control. Now one new smart feature as multi-control association to other smart switches is added into the Smart Life/Tuya App, together with the backlight on/off and relay status. And this smart switch is suitable for different decoration styles with its best value.

### Safety Information

Risk of Electric Shock: Electricity can cause personal injury and property damage if handled improperly if you are not sure about any part of these instructions, please seek professional assistance from a qualified electrician.

**Technical Parameters:**  
Model : DS-122  
Rated voltage: 100-240V AC, 50Hz/60Hz  
Max. Load Power: 1200W/Gang  
Wireless type: Wi-Fi 2.4GHz  
Working temperature: -10°C~45°C  
Support system: Android/iOS

**Warnings:**  
Turn off the power at the circuit breaker and test that power is off before wiring.


### Installation

**Note:**

- Make sure that the power at the circuit breaker is off before wiring.
- Neutral Wire is required. Confirm the wall box contains a Neutral Wire (typically white). If the wall box don't have a Neutral Wire, please try another location at your home or call a professional electrician to install the switch.
- The wire colors indicated in this manual are the usual colors and may differ in some houses.
- Ensure the wire conductors are securely fastened to each wire.
- Ensure the Wi-Fi signal is steady and normally working before wiring.
- If you don't have any wiring experience, please call a professional electrician.


**Step 1**

- Turn off the circuit breaker and use the electrical tester to test the power.
- Ensure the switch is off before wiring.



**Step 2**

- Remove the existing wall plate; turn on the power at the circuit breaker and use an electrical tester to check which wire is line wire; the tester will flash and or chirp when it comes close to a line wire.
- Turn off the power at the circuit breaker and use the electrical tester if the power is off, and then pull the existing switch out; label the line wire and other wires; disconnect the wires from the existing switch with pliers.
- Follow the wiring diagram to connect the switch wires to the wires in the wall box with the wire conductors.

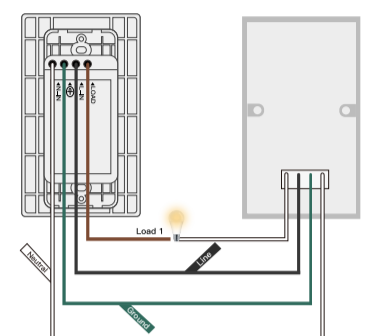

**Step 3**


- Mount the switch with the provided screws and snap the wall plate on it.

**Step 4**

- Turn the power back on at the circuit breaker and then switch the light on.

### Add Devices

**1** Download Smart Life App



Please scan the QR code or download Smart Life on App store.

**2** Registration or Log in

- Download "Smart Life" Application
- Enter the Register/Login interface; tap "Register" to create an account by entering your phone number to get verification code and "Set password". Choose "Log in" if you already have a Smart Life account.

**3** Configure the APP to the switch

- Preparation: Ensure the switch has been connected with electricity; ensure your phone has been connected to Wi-Fi and is able to connect to the Internet.


**Note:**

The switch only supports 2.4G network. If you have connected 5G network, please disconnect 5G network firstly and connect 2.4G network.


**Wi-Fi link method:**

**Pair and clear up the WiFi code (New Updated)**


- Press the power button on the switch 5-8 seconds until the indicator light blinks quickly to pair.
- Make sure your phone is connected to Wi-Fi and Bluetooth.




2. Open Smart Life/Tuya App and Click "+", then the prompt page will automatically show on the screen. Click "Go to add".




3. Select the device you want to add and click "Add"



4. Enter Wi-Fi Password and click "Next", waiting for completing the connection.



5. Add the device successfully, you can edit the name of the device to enter the device page by click "Done"



### How to reset Wi-Fi code

Press the power button on the switch 5-8 seconds until the indicator light blinks quickly to reset the switch

### Indicator Light Status

- The indicator light went out.
  - The switch is connected succeed with mobile phone APP.
- The indicator light blinking slowly.
  - The switch is not connected to the network.
- The indicator light flash continuously and quickly.
  - The switch is currently on the status of matching with mobile phone APP.
- The indicator light flash 1 time every 3 seconds.
  - The switch is into AP pairing Mode


**How to achieve multi-control association**

Note: Please confirm you have successfully finished the WiFi link method above for adding this switch to your Smart Life App before the association.

- WiFi add another smart switch to the same Smart Life/Tuya App. (If there is a smart switch having been added before to the app, just go to next step.)

**Note:** There is no need to wire the new added switch to the light, only L and N are required for wiring.


2. Then you will see two devices in the app and click the main switch (as One gang switch as below) by entering into the next operation.

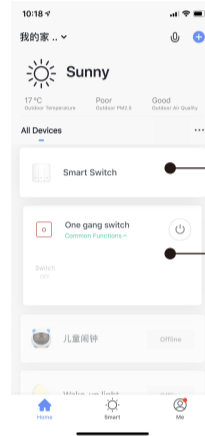


New Added Switch

Main Switch

3. Click "Z" in the upper right corner and choose "Multi-Control Association", and then click "+" in the right corner




4. Choose the switch that you want to associate to and then choose the switch button that you want to control the same light.




5. Then go back to previous page; you will see two items in the page, one is your main switch, the other is the one you associate just now.

**Note:** Please confirm the associated switch is enabled.



6. Now you are able to control your light with two switches. Do not associate another button in the same switch for multi-control.

7. If you want to add another third or more smart switches to control your light, just repeat the steps above. And you will see the result as below when you associate another new switch.

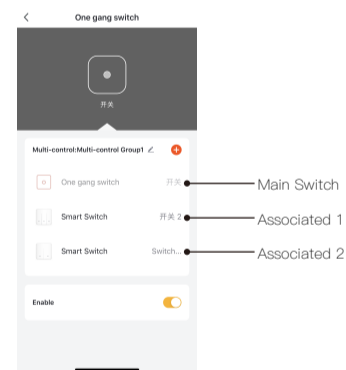

Main Switch

Associated 1

Associated 2

### Set your Echo speaker by Alexa APP


- If you have finished installing Smart Life, just open Amazon Alexa App; log into your Alexa account with password.
- Click the menu on the top left - click "settings", choose "Set up a new device" (choose a device like Echo)

**Note:**

When below page appears, long press the small dot on your Echo device until the light turns to yellow. Then click "Continue" on the App.

**Attention:** The mobile phone can not open a variety of VPN software.

- Choose your own Wi-Fi and wait for a few minutes. After watching an introduction video, click "next step", then it will enter Home page automatically. Now the Echo has been connected to Wi-Fi successfully.

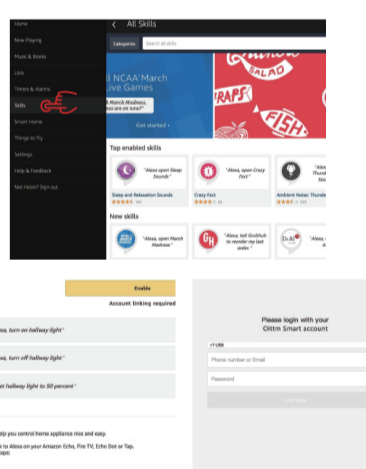

Then input the user name and password of Smart Life APP that you have previously registered. Now you can use your Alexa to control your Smart devices.

Thank you for your support and purchase at we MoesGo, we are always here for your complete satisfaction, just feel free to share your great shopping experience with us.

★★★★★

If you have any other need, please do not hesitate to contact us first, we will try to meet your demand.

