

# GROOVZ



@Groovzaudio



@Groovzaudio

**Thank you** for your purchase! We hope you enjoy your new **Groovz Headphones**.

If you have any questions or concerns, please reach out: [support@groovzaudio.com](mailto:support@groovzaudio.com)



Visit us at  
[www.groovzaudio.com](http://www.groovzaudio.com)  
for exciting product  
offers and to register  
your warranty



JTB PRODUCTS LLC

# GROOVZ<sup>®</sup> PLUS



## NEXT GEN TRUE WIRELESS EARBUDS

USER MANUAL

## FCC Information

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
  - Increase the separation between the equipment and receiver.
  - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
  - Consult the dealer or an experienced radio/TV technician for help. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.
- Radiation Exposure Statement The device has been evaluated to meet general RF exposure requirement. in portable exposure condition without restriction.


## TABLE OF CONTENTS

|                                  |    |                          |    |
|----------------------------------|----|--------------------------|----|
| DEVICE DIAGRAM                   | 01 | HOW TO OPERATE           | 11 |
| SPECIFICATIONS                   | 02 | CLEANING YOUR<br>EARBUDS | 12 |
| PACKAGE CONTENTS                 | 02 | TROUBLESHOOTING          | 13 |
| SETTING UP YOUR<br>HEADPHONES    | 03 | PRECAUTIONS FOR USE      | 15 |
| • Fitting                        | 03 | WARRANTY<br>INFORMATION  | 17 |
| • Powering On/Off                | 04 | NEED HELP?               | 18 |
| • Bluetooth Pairing              | 06 |                          |    |
| • Understanding Power<br>Display | 07 |                          |    |
| • Charging Your<br>Headphones    | 08 |                          |    |
| • Wireless Charging              | 09 |                          |    |

### Warning:

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna(s) must not be co-located or conjunction with any other antenna or transmitter.

- 1 Battery Life Indicator
- 2 Type-C Charging Port
- 3 Ear Tip
- 4 Status Button
- 5 Charging Thimble
- 6 Microphone
- 7 Magnetic Charge Pins
- 8 Touch
- 9 Status Light

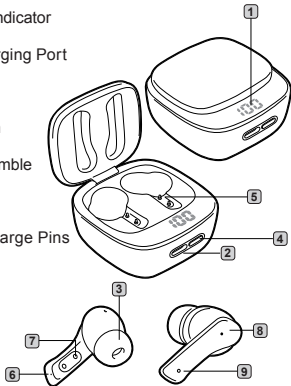

## TECHNICAL SPECS

### SPECIFICATIONS

Model: **GROOVZ (PLUS)**

Bluetooth: **v5.4**

Bluetooth Range: **30 feet**

Earbud Battery: **35mAh**

Charging Case Battery: **600mAh**



### BOX CONTENTS

Bluetooth Headsets

Headphone Charging Case

Type-C Charging Cable

User Guide

Set of Interchangeable

Earbud Tips



## SETTING UP YOUR HEADPHONES


### 01. FITTING

Groovz Earbuds come with three sizes of ear tips: small, medium, and large. We recommend trying each size to find the most comfortable and secure fit. Your earbuds should feel snug in your ears without causing discomfort and should stay in place during everyday movement. A proper fit also helps to deliver the best sound quality and noise isolation.



### 02. POWERING ON/OFF

#### POWERING ON (AUTO MODE)



- Open top cover of charging case.
- Remove earbuds from case.
- The earbuds will automatically enter pairing mode.


#### POWERING ON (MANUAL)



- With earbuds already removed from charging case, press & hold both left and right earbud touch control locations for 5 seconds.

## POWERING OFF

- Remove earbuds from ears.
- Place left and right earbuds into charging case.
- Close charging case and this will automatically power down the earbuds.



## 03.BLUETOOTH PAIRING

- Remove earbuds from charging case.
- Turn ON Bluetooth from device.
- Find bluetooth name "Groovz" in list of pairing options on device.
- Click to connect, and Groovz earbuds will announce successful connection.



NOTE: Previously paired devices will connect within 2-4 seconds.

## 04. UNDERSTANDING POWER DISPLAY

- Your Groovz charging case features LED indicators that show the battery level of the case and your earbuds.

- When you place the earbuds in the case, the LED lights will flash to indicate they are charging.

- A full battery is shown when all LED lights are solid. If the lights are blinking, your case or earbuds are still charging.



## 05. CHARGING YOUR HEADPHONE

- To charge the case, connect the included USB-C cable to a power source. The LEDs will light up to show charging progress.

- When the earbuds are placed inside the charging case, they will begin charging automatically.

- For the best performance, keep your earbuds and case fully charged before use.



## 06. HOW TO USE QI WIRELESS CHARGING



- Make sure your Groovz earbuds and charging case support Qi wireless charging. For best results, use a Qi-certified pad—like the Groovz Wireless Charging Pad, designed to pair perfectly with your device.
- Plug the charging pad into a power source and place it on a flat, stable surface.
- Put the earbuds in the case, close the lid, and center the case on the pad. Align it properly for charging to begin.

- Confirm Charging: Look for the LED on the case—it should light up or blink. Some pads may also have an indicator light.
- Let the earbuds charge fully. Charging time varies by pad and battery level. Refer to the pad manufacturer's guidelines if needed.
- Once charged, remove the case from the pad. Your earbuds are ready to use.

### SAFETY TIPS

- Don't place metal objects between the pad and case.
- Avoid charging in extreme heat, cold, or humidity.
- If issues arise, check the troubleshooting section or contact support.

## HOW TO OPERATE

### PLAYING STATE

|                |                  |
|----------------|------------------|
| Play/Pause     | Single Tap       |
| Previous Track | Double Tap Left  |
| Next Track     | Double Tap Right |
| Volume +       | Triple Tap Left  |
| Volume -       | Triple Tap Right |

### CALL STATE

|                                |               |
|--------------------------------|---------------|
| Answer/<br>End a<br>Phone Call | Double<br>Tap |
| Reject a<br>Phone Call         | Long<br>Press |

### IN SIRI

|                                |                                              |
|--------------------------------|----------------------------------------------|
| Activate<br>Voice<br>Assistant | Tap &<br>Hold<br>Right<br>for 1.5<br>Seconds |
|--------------------------------|----------------------------------------------|

## CLEANING YOUR GROOVZ EARBUDS



- Gently pull off the ear tips from each earbud.
- Rinse the ear tips with water only—do not use soap or household cleaners.
- Wipe the ear tips with a soft, dry, lint-free cloth.
- Allow the ear tips to dry completely before reattaching them to your earbuds.

## TROUBLESHOOTING

### HAVING TROUBLE PAIRING YOUR GROOVZ EARBUDS?



- **Ensure Bluetooth Is On:** Confirm Bluetooth is enabled on your smartphone, tablet, or computer.



- **Check Earbud Battery:** Place the earbuds in the case and check the LED indicators to ensure they are charged.

- **Charge the Case:** Connect the charging case to power if the battery is low.

- **Restart Your Devices:** Restart your device (phone, tablet, etc.) and the earbuds.

### RE-PAIRING STEPS:

- **Forget the Device:** Remove the earbuds from your device's Bluetooth list (this is often called "forget" or "unpair").
- **Restart Bluetooth:** Turn Bluetooth off and back on again on your device.
- **Re-Pair the Earbuds:** Place the earbuds in pairing mode and attempt to pair again.

### RESETTING:



- **Charging Case Reset:** Place the earbuds in the charging case, then press and hold the button on the case until the LED indicator flashes red, then white. This signals that your earbuds have been reset and are ready to pair again.

## PRECAUTIONS FOR USE

- Store headphones in a cool dry, ventilated environment.
- Avoid contact with oil, watervapor, and steam.
- Avoid cleaning with irritating, organic solvents or materials containing these ingredients.
- Use the headphones according to the provided specifications, and avoid exposing to environments that could affect performance like moisture, dust, or extreme heat.

- To ensure smooth connection, it is recommended that the distance between the mobile phone and the headphones be within 10 meters.
- If the headphones fail to connect or communicate properly, do not dismantle the headphones without permission. The device and its accessories are not guaranteed otherwise.
- To charge the headphones, please use the standard Type-C charging cable or the one specified by our company.
- Keep the headphones sufficiently charged to ensure normal operation.

## WARRANTY INFORMATION

Groovz headphones come with a 1-Year Limited Warranty from the date of purchase. The warranty covers defects in materials and workmanship. It does not cover accidental damage, misuse, or unauthorized repairs. Should your product become defective during the warranty period, we will repair or replace (at our option) your product.



To register your warranty or report any defects, please contact customer support at [support@groovzaudio.com](mailto:support@groovzaudio.com).

**GROOVZ is a registered trademark of  
JTB Products LLC, West Chester, PA.  
Designed and Engineered in the USA.**

## NEED HELP?

SCAN THIS CODE WITH  
YOUR PHONE FOR



# GROOVZ

- Step-by-step tutorial videos
- Frequently asked questions
- 7-day-a-week support

[www.groovzaudio.com](http://www.groovzaudio.com)  
West Chester, PA