

PORTABLE PA SYSTEM

USER MANUAL



S92 Pro Manual



: Long press “” to turn on, then the red light will long light; in “power on” status, long press “” to turn off, then the red light will go out.

: Short press to switch modes among Bluetooth, audio in and U disk, TF card mode; (If you plug USB driver)

: In TF card reading mode or Bluetooth mode, short press “” means last song; in TF card reading mode, long press means fast backward.

(Note: in Bluetooth mode, long press “” not support fast backward.)

: In TF card reading mode or Bluetooth mode, short press “” means next song; in TF card reading mode, long press means fast forward.

(Note: in Bluetooth mode, long press “” not support fast forward.)

:Pause/Resume;


:Short press “” means increase volume one by one while long press means increase the volume in a fast way.

:Short press “” means decrease volume one by one while long press means decrease the volume in a fast way.




:Long press to enter pairing status with red lights flashes;

:In the “power on” status, short press volume “” or “” can display the current battery level.

Function Illustration (Wireless MIC):.....

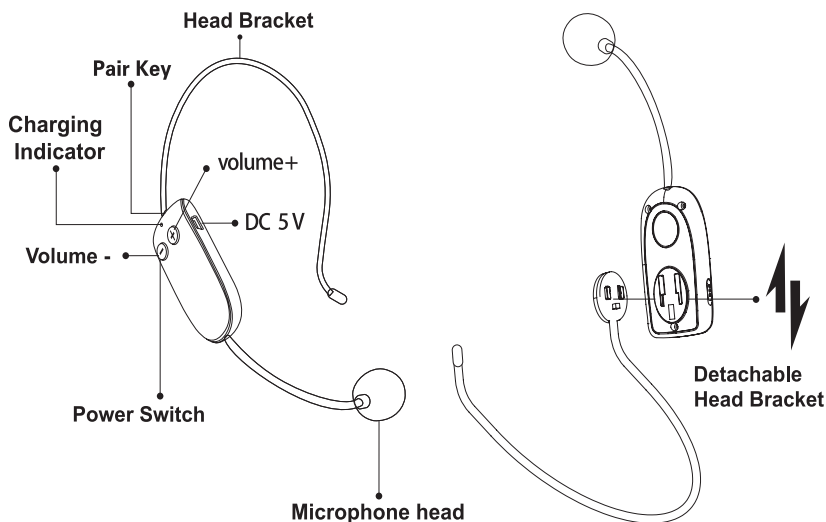

How to disassemble the wireless mic:



How to Pair U8 Wireless Headset Microphone with Speaker?

1 Turn on U8 wireless microphone with **Blue light** becomes constantly lights.



2 Turn on the UHF wireless voice amplifier, then long press “UHF” key and the **red indicator** light will **flash**, which means the device has enter into the UHF wireless pairing status;



3 Do a press on the small silicone button  on the microphone until red light on the speaker from flashing to **constantly red**, it means they paired successfully.



Noted: long press UHF button on the speaker again, microphone will disconnect with speaker automatically, the red lights on the speaker will become flash , Please refer to above steps to connect again if you like.

Noted: Paired successfully, then short press “UHF” key of voice amplifier, you can pause UHF wireless amplification mode. Short press again, you can turn on the UHF wireless amplification mode.

How to Pair U5 Wireless Handheld Microphone with Speaker?

1 Long press “” to turn on U5 handheld microphone with **Blue light** becomes constantly lights.



2 Turn on the UHF wireless voice amplifier, then long press “UHF” key and the **red indicator** light will **flash**, which means the device has enter into the UHF wireless pairing status;





3 Quick triple click “” button on the U5 until the red indicator light on the speaker from flashing to **constantly red**, it means they paired successfully.

Kindly be informed that speaker supports U5 AND U8 working at the same time.

Pair method is the same as above; Just pair each microphone one by one;


How to Play Music ?.....

1 Click  button to switch to Bluetooth mode with voice prompt: Bluetooth waiting for connection;



2 Turn on Bluetooth device and search named “**S92**” to pair.

How to Play Aux



plug the 3.5mm audio cable into the AUX hole.



connect to any device with 3.5mm audio output



Audio Format supported:

MP3

WAV

WMA

APE

FLAC

How to Play USB drive or TF card

Just connect a USB drive or TF card, then speaker will play music automatically. Please make sure your USB or TF card have music files.



USB
flash drive



micro
SD card

HOW TO CHARGING SPEAKER?

Charging speaker with DC 9V plug included.



In charging status: the indicator  flashes while charging;

Fully charged: the indicator  turn on solid lights after charged fully.

HOW TO CHARGING U8 MICROPHONE ?

Charging speaker with DC 5V plug included.



In charging status: the indicator show constantly **RED** while charging;



Fully charged: the red indicator goes off after charged fully.



HOW TO CHARGING U5 MICROPHONE ?.....

Charging speaker with DC 5V plug included.



In charging status: the **RED** indicator flashes while charging

Fully charged: the RED indicator become **constantly RED** after charged fully;

TROUBLESHOOTINGS

Malfunction	Possible Causes	Solution
Powered on but no sound	1.Speaker no power; 2.Speaker Volume set to the minimum;	1.Charge speaker; 2.Click “+” button on the Speaker mic to turn up volume;
Mic no sound	1.Connect lost; 2.Speaker or Mic volume set to the minimum;	1.Please repair mic with speaker follow above steps; 2.Click “+” button on the Speaker or U8 Mic to turn up volume;
Doesn't play music in the USB drive or TF card	1.Format not supported; 2.Program disorder; 3.Volume set to the minimum;	1.Only support MP3 WAV WMA APE FLAC; 2.Reboot speaker; 3.Click “+” button on the Speaker mic to turn up volume;
Howling	Microphone too close to speaker;	Keep distance between mic and speaker;
U8 Microphone loose power quickly	1. Not fully charged; 2. Forget turn off after use;	1.Please make sure U8 mic has been fully charged before use; 2.Please make sure turn U8 mic off after use;
Other		Contact us



WinBridge



After-sale service

WinBridge provides full refund or replacement without no reasons within 30 days + 1 year warranty+ Lifelong Technical Support

 info@winbridgepower.com

 season@winbridgepower.com



Please be confident that Seller support is just a mail away from you in case you find any difficulty. Kindly do not hesitate to write back to us if you need any clarification or any kind of support.
