



S1

Intelligent Helmet Bluetooth Headset

Product Manual


App & Bluetooth Connect With Headset

Connect the headset to the phone via Bluetooth and connect with the app.


1 Download APP



2 App register

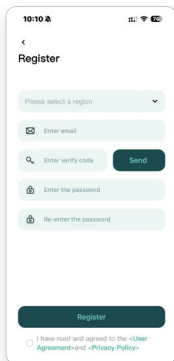


3 Headset power on




4 Start pairing



5 Turn on Bluetooth of the phone, automatically searches for the device named ASMAX S1, and click it, voice broadcast "device connected"




6 Connet headset with APP



1.PACKAGE CONTENTS




S1 Main Unit



Speaker Unit



3M Glue Plate




Metal Clamp



Boom
Microphone




Wired
Microphone



Type-C Cable



Speaker Pads



Velcro For
Speaker



Velcro For
Boom Mic



Velcro For
Hybrid Mic



Microphone
Sponge




Manual





Clean Pack

2.INSTALLATION GUIDE



3.FUNCTION

Main Unit

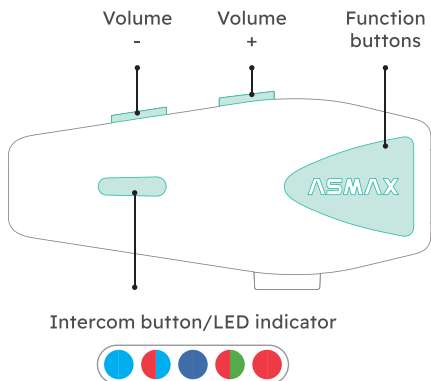


Basic Operations

There are two methods for operating your devices: voice commands and buttons. Select your preference.

• Power On/Off

Button operation

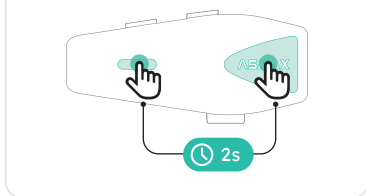

• Phone Pairing

Voice operation



Hi Max, phone pairing

YOU CAN ALSO


Button operation



• Microphone On/Off

Button operation

Note: Simultaneously long press the intercom button and any volume button for 2s.



• Activate The Intelligent Voice Assistant

Voice operation

Note: "Voice Dialing" switch must be turned on in the app first.



• Volume Up/Down

Voice operation



Hi Max, volume up

YOU CAN ALSO

Button operation



Voice operation



Hi Max, volume down


YOU CAN ALSO

Button operation



• Restoring Factory Settings

Button operation



Note: The device will reboot and reset to the manufacturer settings.

Music

• Play/Pause Music

Voice operation



Hi Max, music on



Hi Max, pause music

YOU CAN ALSO

Button operation



Note: Ensure the music player is active

• Switch Music


Voice operation



Hi Max, previous track

YOU CAN ALSO

Button operation



Voice operation



Hi Max, next track

YOU CAN ALSO

Button operation



Radio

• Turn On/Off Radio

Voice operation




Hi Max, radio on



Hi Max, turn off the radio

YOU CAN ALSO

Button operation



• Switch Station

Voice operation



Hi Max, previous station

YOU CAN ALSO

Button operation

Press and hold the **Volume +** to switch to the previous FM channel.



Voice operation



Hi Max, next station

YOU CAN ALSO

Button operation

Press and hold the **Volume -** to switch to the next FM channel.

Note: Radio function must be turned on.



Phone Call

• Answer Phone Call

Voice operation



Hi Max, answer the phone

YOU CAN ALSO

Button operation

Short press any Button to answer.



• End Phone Call

Voice operation



Hi Max, hang up

YOU CAN ALSO

Button operation



• Reject Phone Call

Voice operation



Hi Max, hang up

YOU CAN ALSO

Button operation



• Automatic Call Answering Function On/Off

Button operation

Can be turned on and off by ASMAX APP.



• Add An Incoming Call to Mesh Intercom

Button operation



Note: Ensure the "calling join in Mesh intercom" is already activated on the ASMAX APP during the mesh intercom communication.

4. COMMUNICATE WITH OTHERS

There are 2 modes for this product:

Group mode & Free mode.


ASMAX also supports universal pairing and communicate with other brand Bluetooth headsets exclude in the free mode, each of ASMAX headset can be paired with one other Non-ASMAX brand headset. Moreover, ASMAX headset can bring Non-ASMAX join in the intercom group (maximum 8pcs ASMAX with 8pcs Non-ASMAX). Note: Requires other brand headsets should support universal pairing.

Group Mode

Group mode is a private intercom mode that uses MESH communication intercom technology. It requires mesh networking before intercom, and can support up to 8 people for mesh intercom.


• Group Mesh

Voice operation




YOU CAN ALSO

Button operation




After hearing the number of team members on the broadcast




• Group Mode

Voice operation



YOU CAN ALSO


Button operation



• Cancel Group Mesh

Button operation

Cancel the group when you're in the group mesh state.



Free Mode

Free mode is an open intercom mode that does not require pairing. As long as you are in the communication range, you can automatically connect up to 8 people for intercom.


Voice operation



Hi Max, free mode

YOU CAN ALSO

Button operation



End Intercom

Voice operation



Hi Max, end intercom

YOU CAN ALSO

Button operation



Bluetooth Universal Pairing


- With power on, press the function button for 3s.



- Voice announcement "Start pairing"

Note: Simultaneously, Non ASMAX bluetooth headsets need to activate bluetooth pairing mode

- ×2 Tap



- Voice announcement "Universal pairing"

- Voice announcement "Universal connected"

- Double click the function button to start intercom.



×2 Tap Activate intercom

- Turn off Bluetooth universal pairing

Button operation



Create a group chat for leader in mesh intercom

Leader group chat can only be created in group mode and is one of the sub modes in group mode. It supports up to three people chatting and is used for private communication between the leader and core personnel during riding.

• Create a leader group in group mode

- Click ASMAX WORLD app
- Create a group mesh
- Confirm the group members
- Group owner clicks on the ☰ in the top right corner
- Click on “Leader”
- Click on +
- Select friends

• Switch between leader group chat and group intercom

Button operation



Create private chat for mesh intercom

Private chat groups can only be created in mesh networking, and it is one of the sub models in mesh mode, used for 1V1 private communication during riding.

• Create private chat groups in group mode

- Click ASMAX WORLD app
- Create a team room and invite others to join the group
- Click on the friend you want to send a private message to, then click to send a private chat invitation
- Once the other person taps accept in the app, a private chat will be created

• Switch between private chat and group intercom

Button operation




























5. QUICK OPERATION

ASMAX has two operation modes: intelligent voice and buttons, and you can freely choose according to your own habits.

- When the main unit is connected to the official ASMAX app and the phone is connected to the internet, the main unit can perform intelligent voice interaction operations such as route navigation, sending messages, making and receiving calls, playing music, and so on.
- When not connected to the network, the main unit can perform voice commands through local offline voice commands.

Awakening words **Hi Max**

Function	Voice Command	OR	Button Operation
POWER ON/OFF			 2s
PLAY MUSIC	Hi Max, music on		 1Tap
PAUSE MUSIC	Hi Max, pause music		 1Tap
PREVIOUS TRACK	Hi Max, previous track		 3s
NEXT TRACK	Hi Max, next track		 3s
VOLUME +	Hi Max, volume up		 1Tap
VOLUME -	Hi Max, volume down		 1Tap
ANSWER CALL	Hi Max, answer the phone		 Any button
END CALL	Hi Max, hang up		 1Tap
REJECT CALL	Hi Max, hang up		 3s

Function	Voice Command	OR	Button Operation
PHONE PAIRING	Hi Max, phone pairing		 3s
GROUP MESH	Hi Max, group mesh		 2s  Join 2 or N members.
GROUP MODE	Hi Max, group mode		 1Tap
FREE MODE	Hi Max, free mode		 1Tap
UNIVERSAL MODE		 3s  Follow their instruction Enter pairing mode	 2Tap  2Tap
END INTERCOM	Hi Max, end intercom		 1Tap
RADIO ON	Hi Max, radio on		 2Tap
RADIO OFF	Hi Max, turn off the radio		 2Tap
PREVIOUS STATION	Hi Max, previous station		 1Tap
NEXT STATION	Hi Max, next station		 1Tap
FACTORY RESET			 3s

ASMAX

Customer service email
support@asmaxworld.com



ASMAX WORLD

