

PRINTER SLUG

version 2

USER GUIDE

Wireless FM Transmitter and Car Charge




Contents & Information

- Contents & Information
- Overview
- Safety Precautions
- Setup
- Operation
- Specifications
- Troubleshooting
- Cleaning & Care
 - Cleaning
 - Storage
- Compliance Statement

Features

- Seamlessly switch between hands-free calling and music
- Supports FM frequencies 88.1-107.9MHz
- Bluetooth® wireless technology
- Built-in charging ports: 1 USB-C + 1 USB + 2 Accessory Outlets
- 1 USB port for media playback
- Power Delivery-enabled devices can charge faster (via USB-C port) at up to 36W Max*
- Quick Charge™-enabled devices can charge faster (via USB port) at up to 18W Max*
- Non-fast charge-enabled devices can standard charge (via USB port) at up to 12W Max or (via USB-C port) at up to 15W Max
- Over-voltage/current/heat and short circuit protection
- Built-in microphone with echo cancellation
- Plugs directly into car's Accessory Outlet

Overview

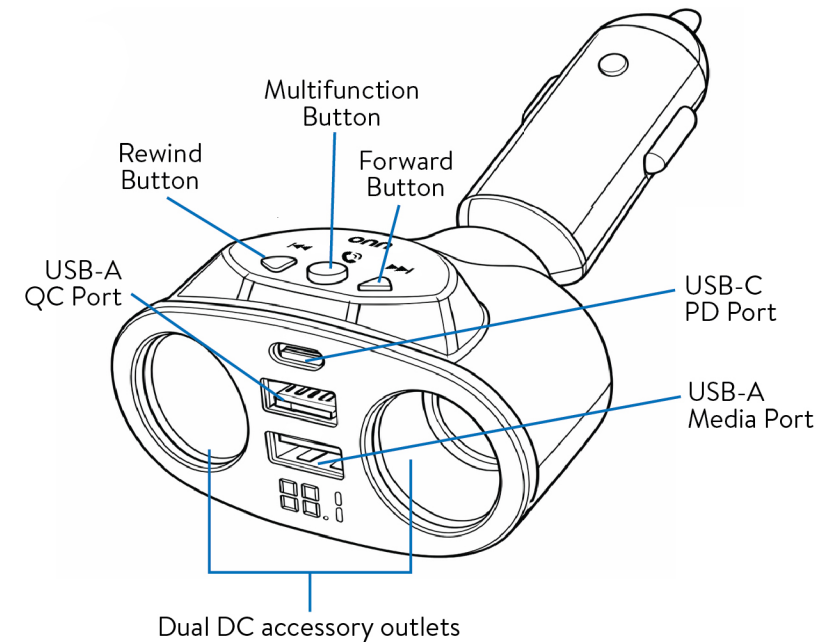

Safety Precautions

 CAUTION

- ### Battery Drain
- To ensure safe operation and optimal performance, unplug the device when not in use to avoid vehicle battery drain.

Avoid Physical Damage

- Do not drop, throw, or disassemble the unit to avoid damage

 WARNING


Do Not Operate While Driving

- Set up the device, select the frequency, and pair your smartphone before starting your journey to avoid distraction.
- Avoid Moisture and Heat
- Keep the device away from water, damp, or high-temperature environments to prevent fire or electrical shock.

Setup

POWER UP YOUR TRANSMITTER CAR CHARGER

1. Start up your vehicle.
2. Insert the DC plug into your vehicle's 12V-24V accessory outlet.
3. Rotate or tilt the transmitter for optimal viewing angles and accessibility.

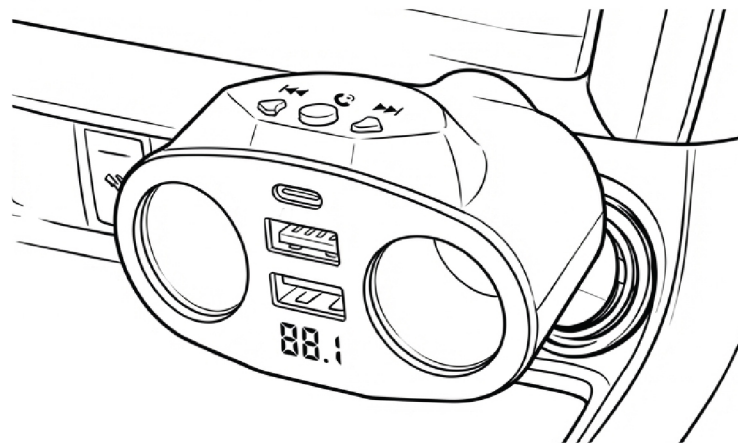

Operation

CONNECT BLUETOOTH®

- Enable Bluetooth on your phone and select “PFM3-1002” under “New Devices.”

SET FM STATION

- On the car charger, long press the middle multifunction button until the station's display blinks.
- Single press the rewind or forward button to select unused station (88.1-107.9MHz).
- Press and hold the rewind or forward button to enter fast search mode.
- Once you reach triple digit channels, the car charger's display will showcase decimal digits for channels above 99.9, including 00.0 for 100.0, 00.1 for 100.1, and up to 08.0 for 108.0.
- Single press middle multifunction button to confirm.
- Make sure the unused station matches your vehicle's radio to the same station displayed on the car charger.

Specifications

- Input: 12V-24V 10A
- USB-C port max output: 36W PD (5V=3A/ 9V=3A/ 12V=3A)
- USB-A1 Port max output: 18W QC (5V=3A / 9V=2A)
- USB-A2 port: For media playback (not for charging)
- Max simultaneous USB output: 54W
- DC Accessory Outlets Output: 12V-24 V5A
- FM Frequency range: 88.1-107.9MHz

Troubleshooting

Cleaning & Care

CLEANING

- Use a clean, soft cloth to wipe device

STORAGE

- Store in a cool, dry place in the original package.

 WARNING

- Do not use harsh chemicals, bleach, or abrasive cleaners. Do not submerge device in water.

Compliance Statement

FCC Compliance Notice

This device complies with Part 15 of the FCC Rules, operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

- **Warning:** Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- **NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.