
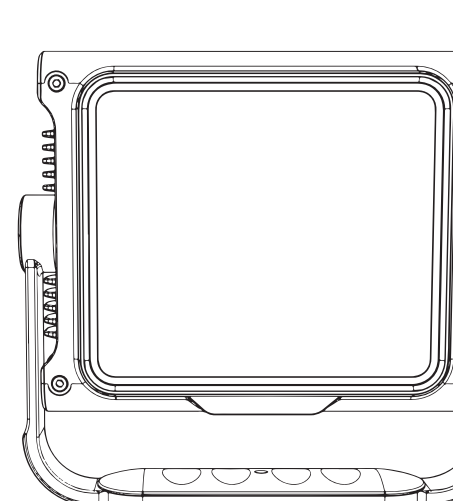
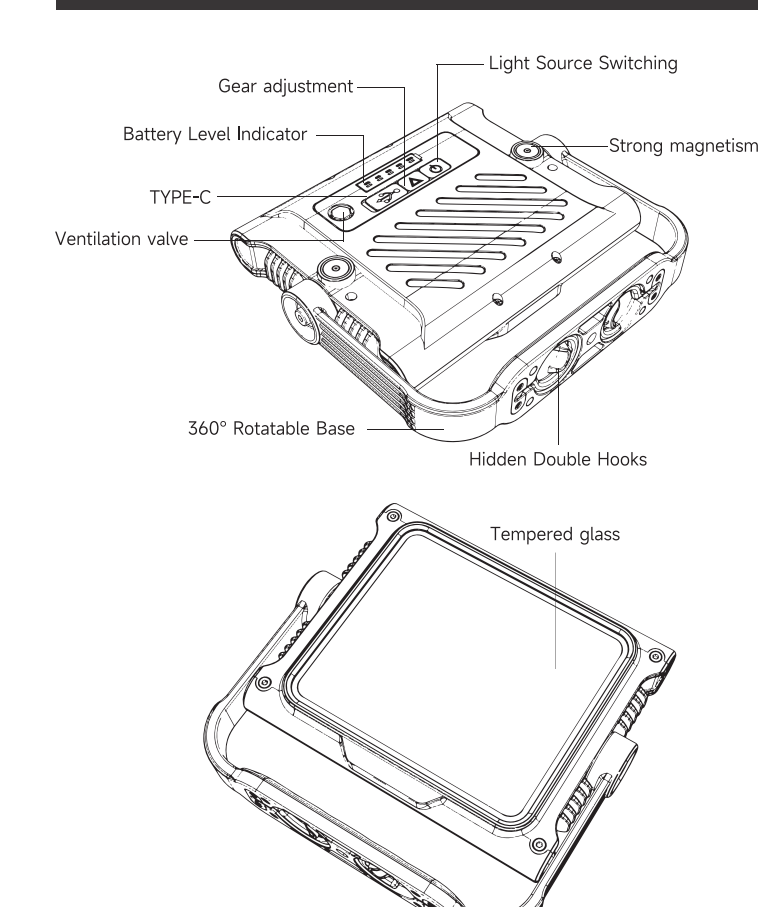


单页100X140MM 整张300*140mm


MADE IN CHINA

PRODUCT DETAILS



- Light Source Switching
- Gear adjustment
- Battery Level Indicator
- TYPE-C
- Ventilation valve
- 360° Rotatable Base
- Hidden Double Hooks
- Tempered glass
- Strong magnetism

PRODUCT INFORMATION



USB-C

Category	Specification
Lighting	Light Output: 3500 Lumens LED Beads: 600 pcs Wide-Angle LEDs Lighting Modes: 2700K/3500K/4500K/5500K/6500K Runtime: Up to 10 days (depending on mode)
Power	Battery Capacity: 2000mAh Rechargeable Li-ion Charging Port: Type-C Fast Charging
Design & Features	Mounting Options: Magnetic Base, Dual Hooks, 1/4" Tripod Mount Material: ABS + PC Housing, Tempered Glass Lens Dimensions: 6.62 x 8.11 x 1.69 in Weight: 2.3 lb
Durability	Waterproof: Ultrasonic-Sealed, Rainproof Design Drop Resistance: 1.2 m Free Drop, No Damage

Gear Position Guide

Power button Short press: White Light - Warm Light - Yellow Light - Off

Function keys Short press: Cycles through Low-Medium-High brightness. Long press: Continuously adjusts brightness. Use this method to switch between minimum and maximum brightness. If you hold the switch in any brightness level for more than 10 seconds and then press it again, the light will turn off immediately.

Battery indicator light
Corresponding ratio indicator light flashes when charging, full indicator light is always on. A full 30 hours of charging time is recommended before first use.

Remote Control Pairing
Press and hold the camping lamp's switch for 5 seconds, then it will enter the pairing mode (at this time, the battery indicator light flashes). When the product enters the pairing mode, press and hold the remote control's switch for 5 seconds to perform the pairing. If the pairing is successful, the battery indicator light stops flashing. If the pairing fails for 10 seconds, the battery indicator light returns to its normal state. During the pairing process, other switches cannot be operated. Clear the remote control when the lamp is off. Press and hold the gear button for 7 seconds to clear all paired remote controls.

Note
Do not place in backpacks, fabric bags or flammable plastic containers when lit.
Non-pet toys

Distress
Do not disassemble the product.
Do not throw the product into fire. It may cause the battery to burn or even explode, causing unforeseen disasters.
Children please use under adult supervision.

Remote Control Function

- Power Button: Short press to turn the light on/off
- Short press to increase brightness level; long press for stepless dimming. The light will flash when reaching minimum/maximum brightness.
- Short press to increase brightness level; long press for stepless dimming. The light will flash when reaching minimum/maximum brightness.
- Short press to switch the color temperature to white light.
- Short press to switch the color temperature to yellow light.
- 15-minute timer; (Lamp flashes once upon successful timer setting)
- 30-minute timer; (Lamp flashes once upon successful timer setting)
- 60-minute timer; (Lamp flashes once upon successful timer setting)
- Cancel timer function; (Lamp flashes three times upon successful cancellation)
- Press and hold for 5 seconds to memorize current brightness and color temperature; lamp flashes once upon successful memorization. When lamp is on, press briefly to switch to previously memorized color temperature and brightness.

Warnings

- Waterproof and dustproof performance is only guaranteed when the charging port is securely closed. Over time and due to physical damage, waterproof and dustproof performance may diminish or be lost.
- Do not look directly at the light source or irradiate your eyes. It will cause short-term blindness and serious damage to the retina.
- Do not cover the light outlet at close range, the energy radiated from the light may cause external objects to burn.
- Do not illuminate in water or liquid, which may cause damage to the product.
- Please use TYPE-C charging cable to charge the product.
- When storing for a long time, please fully charge the product first, and it is recommended to charge the product once in 1 month when it is not applicable for a long time.
- The button has magnetic suction, the metal powder absorbed in the performance will affect the function, please remove it in time.
- If you have implanted a pacemaker or defibrillator, please avoid close or prolonged contact with the product to avoid interference with it.

PRODUCT INFORMATION

AFTER-SALES SERVICE / Limited Warranty

All products include a 1-year limited warranty for the main device and a 3-month limited warranty for the built-in battery, effective from the date of delivery.

Within 30 days of receipt if the product has quality-related issues not caused by misuse, accident, unauthorized repair, or normal wear and tear, we will provide a free replacement or refund, including roundtrip shipping. Customers may also return the product within 30 days for any reason according to Amazon's return policy.

From 30 days up to 1 year for warranty claims due to defects not caused by misuse, accident, unauthorized repair, or normal wear and tear, the customer is responsible for shipping the product to us, and we will cover the repair or replacement costs and return shipping.

After the 1-year warranty period, repair services are available, but all repair costs, replacement parts, and shipping fees will be borne by the customer.

Exclusions: Accessories such as charging cables, packaging, or normal cosmetic wear are not covered under this warranty.

FC

Manufacturer: Ningbo Heliyu Outdoor Sports Co., Ltd.
Address: No. 688 Jinda Road, Yinzhou District, Ningbo, Zhejiang, China
Email: sekro@outlook.com



FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.