


## Wireless Audio Adapter User Manual

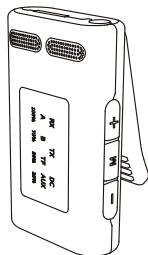

MODEL: GT89

Please read this manual carefully before use


### Package Contents

- 1 x Wireless Audio Adapter
- 1 x 3.5mm audio cable
- 1 x USB-C Charging Cable
- 1 x User Manual

### Product Description

Wireless audio adapter is a Wireless device that uses the Transmitter function to send an audio signal from your screen to Wireless or TWS headphones, allowing wireless listening. The product allows you to connect up to two pairs of headphones simultaneously and can be used with different devices or situations, such as on an airplane, at the gym, with the TV, or with a PC/TABLET.

### Product Overview

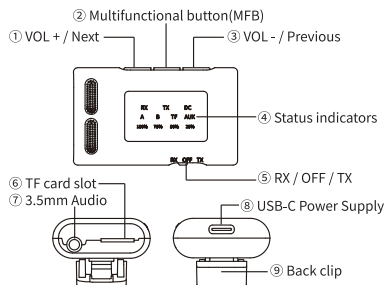

### Button Functions


| NO. | Function              | Operation                           |
|-----|-----------------------|-------------------------------------|
| ①   | VOL + / Next          | press and hold / short press        |
| ②   | Play/Pause            | short press                         |
|     | Take a call           | short press                         |
|     | End a call            | short press                         |
|     | Reject a call         | press and hold                      |
|     | disconnect/reconnect  | Quickly press twice                 |
| TX  | search/disconnect     | Quickly press twice                 |
|     | switch TF/AUX/BT      | press and hold                      |
|     | clear pairing history | Press and hold for 8s               |
| ③   | VOL - / Previous      | press and hold / short press        |
| ④   | RX / OFF / TX         | Slide to mode TX/ turn off /mode RX |

### LED Status indicators

| Status               | LED Indicator                                                      |
|----------------------|--------------------------------------------------------------------|
| Pairing mode         | TX:LED stays Red / RX:LED stays Blue                               |
| Connected A/B device | Waiting for pairing:LED flashes fast blue,Connected:LED stays Blue |
| Reset                | Lights off and then lights on                                      |
| charging DC          | LED stays red, turn off when finished                              |
| low battery prompt   | 25% LED flashes                                                    |

### Charging the Adapter

Please fully charge the product before first use,DC red light on the transmitter indicates that charging is in progress; the red lights will turn off to indicate a full charge.

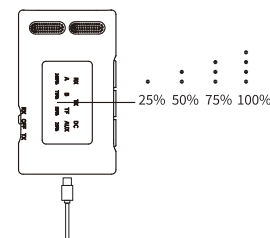

Double click the "+" or "-" to check the battery level. It's best to initiate charging when the Relay is at 25% battery level or below.

### OPERATING INSTRUCTIONS:

As a Wireless Transmitter(TX mode)

- 1). Connect your audio source (TV, computer, DVD player, etc.) to adapter with the audio cable (AUX)

- 2). Turn on the adapter, slide to TX mode (TX LED stays RED), and enter pairing mode (A and B LED flash blue). Set your Wireless headphones or speakers to pairing mode and wait for pairing to succeed (A LED stops flashing)
  - 3). After pairing with the first device, quickly press the M button twice (B LED flashes blue) to enter pairing mode. Then proceed to pair with the second device. Pairing is successful (B LED stops flashing)
- (Pressing button M will disconnect / re-search paired device.)

#### As a Wireless Receiver (RX mode)

- 1). Connect your speaker to adapter with the audio cable (AUX)
  - 2). Turn on the device, slide to RX mode (RX LED stays blue), enter pairing mode (A 1 and B flash blue). Activate Wireless on your phone/computer/tablet, click GT89 connection, and wait for pairing to succeed (LED stops flashing). You can connect two devices at the same time.
- (Pressing button M will disconnect/reconnect paired device.)

#### Play music from TF card drive

Plug TF card drive into the TF card slot on the top side, The screen shows TF, adapter will start playing automatically. In RX receiving mode: press and hold the M buttons to switch between TF card/Wireless modes. In TX transmitting mode: press and hold the M buttons to switch between TF card/AUX modes.

### Product Specifications

Wireless Protocol: HSP, HFP, A2DP, AVRCP  
Output: 3.5mm Audio  
Operation Frequency: 2402~2480 MHz  
Maximum Radio Frequency Power: 3.39dBm  
Wireless audio technology: SBC  
Wireless TX/RX distance: up to 10M/33ft(no blocking)  
Effective range of Wireless microphone:0.5 to 2 m  
Charging interface: USB-C 5V=1A  
TF-Card Capacity: ≤64GB(FAT32 format)  
music format:MP3,WMA,WAV,FLAC  
Battery Type: Lithium polymer battery  
Battery capacity:200mAh 3.7V(0.74Wh)  
Charging time:about 2 Hours  
Working hours:RX mode: About 10 hours  
TX mode: about 8 hours  
Charging current:300mA  
Working current:10~60mA  
Shutdown current:1.6uA  
Product size: 33mmx24mmx55mm  
Product weight: about 20g  
Materials: ABS

### Trouble shooting

- 1) I am having trouble pairing and connecting to my Wireless device.Please check the following:
  1. Your wireless device supports the wireless profiles listed in the specifications.
  2. Adapter and your device are next to each other or within 3 feet/1 meter.
  3. Make sure both adapter and the wireless device are in pairing mode.
- 2) If you're not getting audio while dual linked, try turning the affected headphones off and then on again. In some cases, dual pairing with AirPods may trigger their audioMUTE function. If this happens, put them back in their charging case (with the lid open) for 2 seconds, then take them out again to return them to normal. This may help to solve the problem.
- 3) My Adapter at max volume; why is the sound still so quiet?
 

Try adjusting the volume on both the adapter, your headphones, and / or the audio source. You should be able to reach sufficient volume levels by adjusting all three.
- 4) Why am I getting audio delay?
 

The adapter has an Cutting-edge wireless chip that improves the transmission delay and connection defect problems of the old wireless version and offers you a faster, more stable and smarter connection with less sound quality loss.

### Information to User

- [1] Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
  - Increase the separation between the equipment and receiver.
  - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
  - Consult the dealer or an experienced radio/TV technician for help.
- [2] Important: Change or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.