

Frigga Smart Life



User Manual

4G & Wi-Fi 6 Real-Time Multisensor

Key Features at a Glance

4G LTE Technology

Frigga's built-in global SIM with multi-carrier support keeps you connected anytime, anywhere.

Wi-Fi 6 Connectivity

Supports both 2.4 GHz and 5 GHz networks. Say goodbye to blind spots! Ideal for RVs on the move, remote cabins, greenhouses, or monitoring your baby or pets at home.


Stay Informed

Receive real-time alerts via email and the app for temperature alarms, power outages, and network issues.


Smart App Control

Provides real-time monitoring, alarm notifications, access to historical data, customizable alerts, and device sharing.


Package Contents




Multisensor
(Wall-mount Bracket)




Power Adapter




Power Cable




Double-Sided Tape



After-Sales
Service Card




Screws * 2



External Probe




Lanyard




User Manual

Product Overview

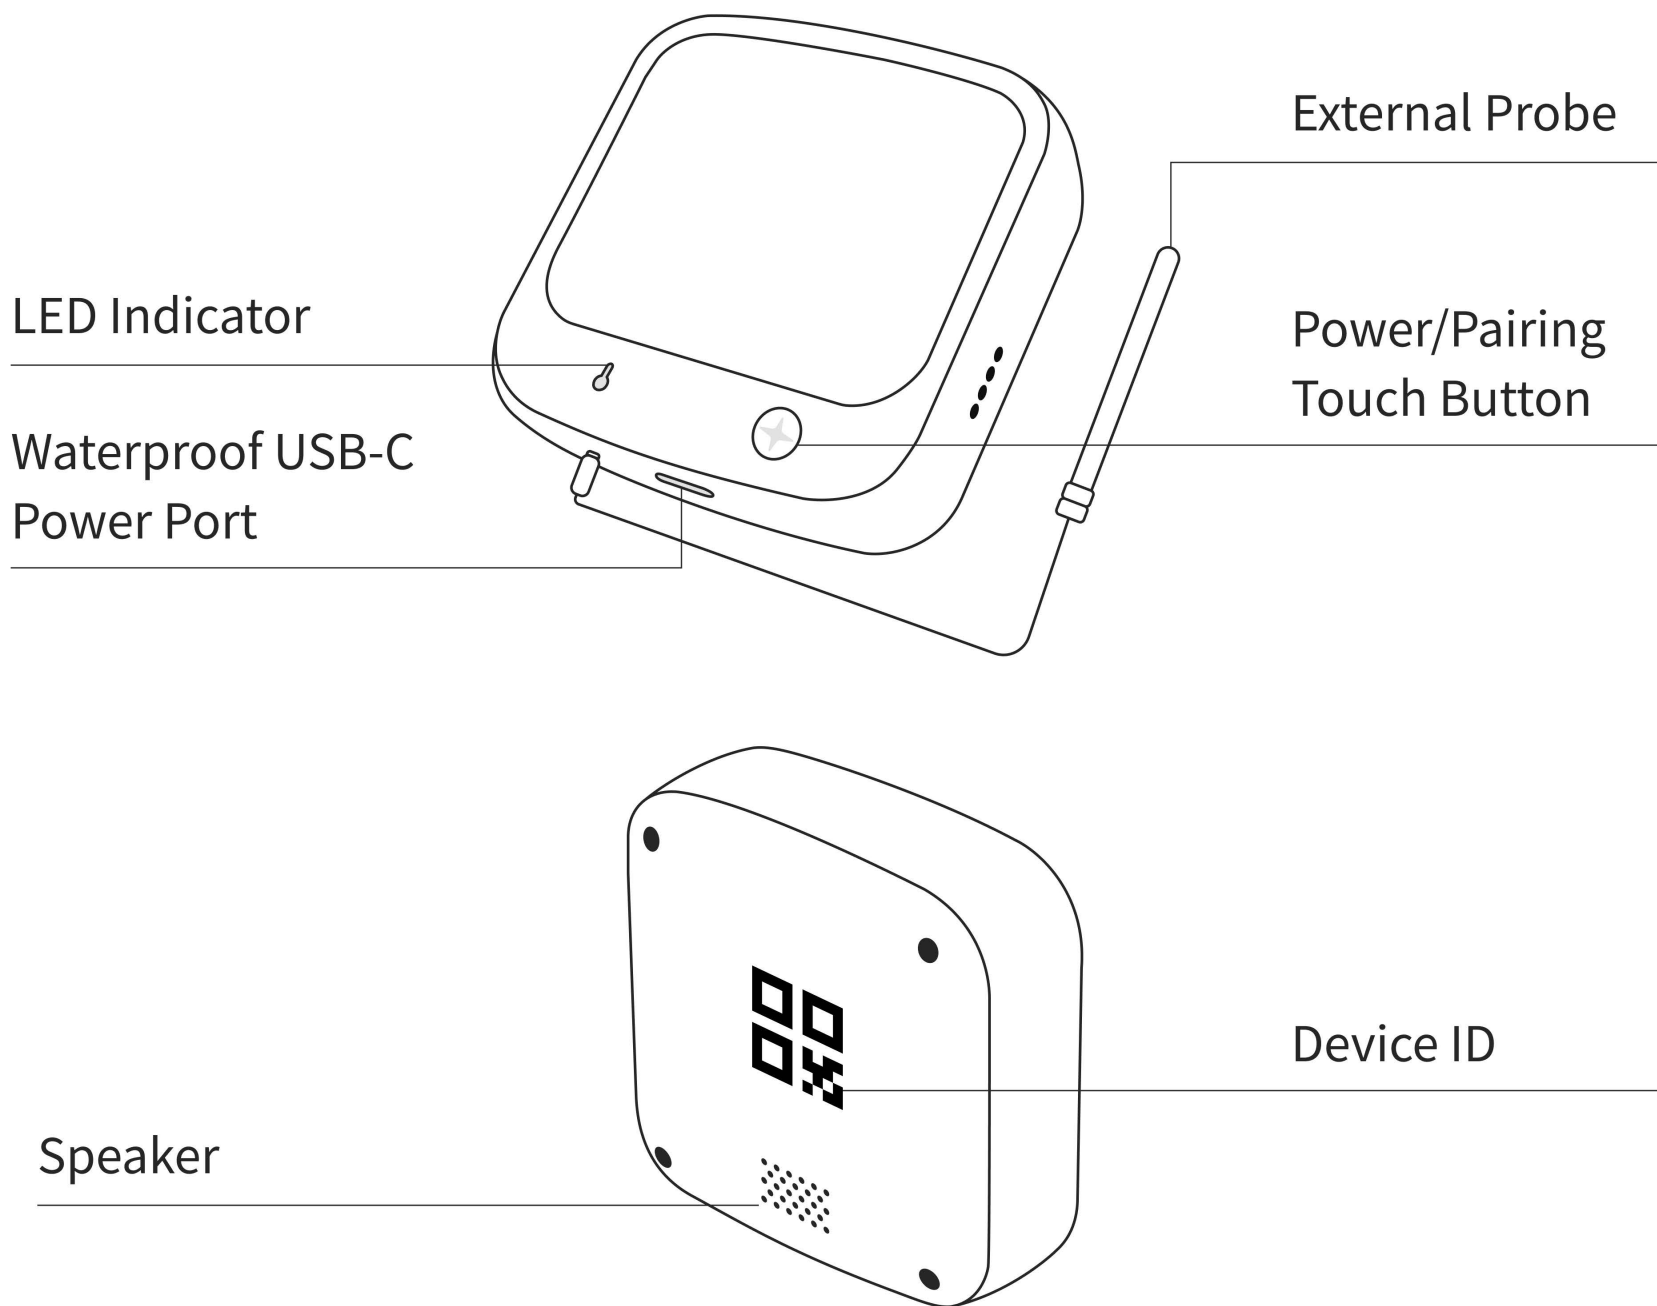

Silent Mode

New device,
not used

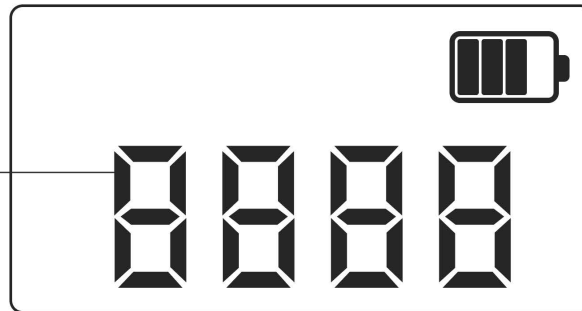

Tip: Touch and hold the power button for 5 seconds to exit silent mode and activate the device.

Power-on Screen

Wi-Fi Signal
Strength Icon

Charging Status

Cellular Signal
Strength Icon

Battery Icon

Alarm Indicator

Temperature
Readings



Set Up Your Device in Minutes

Step 1: Create an Account



1. Scan the QR code to download the app.
2. Follow the on-screen instructions to register an account.

Step2: Power On & Add Device

1. Power On

Touch and hold the device's power button for 5 seconds until you hear the voice prompt: "Welcome to Frigga Smart Life." The device will then automatically enter network configuration mode.

2. Add Device

Open the Frigga SmartLife App, tap the “+” icon in the upper right corner and follow the on-screen instructions to search and add your device.

3. Connect to Wi-Fi (Optional)

Once the device is selected, if you wish to connect to Wi-Fi, proceed to the network configuration screen. Select the appropriate Wi-Fi network, enter the password and complete the connection process.

Tip: Wi-Fi connection is optional. If you do not require Wi-Fi, you may skip this step.

LED Indicator Guide

Status	LED Indicator
Device Charging	Solid green light
Device Fully Charged	Solid blue light
Wi-Fi Configuration	Flashing blue light
Threshold Exceeded	Red light flashes once every 30 seconds
Network(Wi-Fi/Cellular) Connection Failed	Red light flashes 5 times

Specifications

Temperature Range	-40°F ~ +176°F (-40°C ~ +80°C)
Temperature Accuracy	±0.9°F(-4°F~+104°F), ±1.8°F for other range
Cellular	Global 4G LTE network
Wi-Fi 6	2.4GHz and 5GHz Wi-Fi networks
Battery Type	Lithium-ion rechargeable
Battery Life	240 hours (from full charge to 0%)
Data Reporting Interval	Battery power: 30 min Charging + Cellular: 30 min Charging+Wi-Fi: 10 min

Device Placement

The device can be:

- ① Hung using a lanyard
- ② Mounted to a wall with double-sided tape
- ③ Securely installed with screws

Please choose the installation method that best suits your specific application needs.

Battery Information

This device may take up to 24 hours to fully charge from 0% to 100%.

This slow charging rate is designed to minimize battery heating, helping to maintain the accuracy of temperature readings.

Troubleshooting

Unable to Add Device

1. Make sure the device has exited silent mode and is successfully powered on.

2. Confirm that the device has not already been added by another user. If it has, ask the original user to share device access via the app.

Unable to Connect to Wi-Fi

1. Make sure a stable Wi-Fi network is available nearby.
2. Ensure Bluetooth is enabled on your phone.
3. Check that the device is in pairing mode. (Tip: If not, press and hold the device for 5 seconds until you hear the voice prompt: “Start Wi-Fi Connection” . A voice prompt will also confirm when the connection is successful.)
4. Verify that you have selected the correct Wi-Fi network and entered the correct password.

No Indicator Light on the Device

Check the LED indicator option is enabled in the app settings.

Voice Prompts Not Working Properly

1. Confirm that the voice prompt feature is enabled.
2. Check if “Night Mode” is on. If so, ensure that the time zone is set correctly to avoid unexpected behavior.

No Alert Notifications Received

1. Please ensure the “Send to the account mail” option is checked.
2. Confirm that a valid email address is entered for alerts. Also, check your spam folder to see if the email alerts are being routed there.

**If you need additional assistance, please contact us via:
support@friggatech.net**

Customer Service

Warranty: 1-Year Limited Warranty

Email: support@friggatech.net

Official website: www.friggatech.net

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF Exposure Statement

To maintain compliance with FCC'S RF Exposure guidelines, This equipment should be installed and operated with minimum distance of 20cm between the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.



www.friggatech.net



Download
Frigga Smart Life App