



PMN: BLUETOOTH HEADSET

STORM PLUS, STORM ROAD MANUAL

www.BlueTigerUSA.com



YOUR FIRST CALL
SHOULD BE TO US!

+1 800 935 1165

Become part of the Blue Tiger Family by
registering your product today!



Congratulations on your purchase
of a **Blue Tiger Bluetooth headset!**

Our mission is to help
professional drivers be safe while
traveling on the road.



Important Safety Tip

Be Cautious of Excessive Volume Levels

Volume levels are measured in decibels (dB). Exposing your ears to any noise at or above 85 dB can cause gradual hearing loss.

According to the Occupational Safety and Health Administration (OSHA), listening to volume levels over 100 dB for more than two hours at a time can lead to hearing loss.

<http://www.osha.gov/SLTC/noisehearingconservation/#loud>



Table of Contents


1. Product Overview.....	4
2. Basic Operations.....	5
3. Bluetooth Pairing and Connection.....	7
4. Connection with Two devices.....	8
5. LED Indicator.....	9
6. Charging.....	10
7. TTS Tone.....	12
8. Product Specifications.....	13
9. Attention and Q & A.....	14

Product Overview



Package Contents:

- A. Limited Edition Storm Plus Headset
- B. Magnetic Velvet Ear Cushion
- C. Magnetic Protein Leather Ear Cushion
- D. USB-C Fast Charge Cable
- E. FCC Certified Vehicle Charger
- F. Quick Start Guide

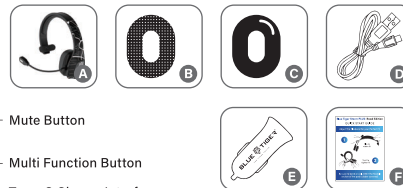



Basic Operations

Button	Function	Operation
Multi-function Button (MFB)	Power On	In off status, hold the MFB for 3 seconds to power on.
	Power Off	In on status, hold the MFB for 3 seconds to power off.
	Enter into Pairing Mode	In off status, hold the MFB for 3 seconds to power on and enter pairing mode. If the headset is not paired within 10 minutes, it will power off automatically. If your headset is already paired to a device and the device is in range, it will pair to your device automatically each time your headset is powered on.
	Play/Pause	Press to play music.
	Redial A Call	In connected standby/playing music mode, double press the MFB to dial the last call.
	Answering Incoming Calls	Incoming call during a call: 1. Press the MFB once to answer the new call and hang up the current call. 2. Double press the MFB to answer the new call and keep the current call. 3. Hold the the MFB for 3 seconds to reject the new call. 4. Double press the MFB to switch between both calls.
	Voice Dialing	In connected standby/playing music mode, hold the MFB for 2 seconds then release.
	Answer	Press the MFB to answer an incoming call.
	Hang up	During a call, press the MFB to end the call.



Multi-function Button (MFB)	Reject a call	Hold the MFB for 2 seconds to ignore an incoming call.
	Activate Siri/Google	In the paired state, hold the MFB for 2 seconds to activate Siri or Google Assistant.
Volume +	Volume Up	Press.
	Next Song	Hold for 1 second.
Volume -	Volume Down	Press.
	Previous Song	Hold for 1 second.
Mute Mic Button	Microphone Mute	During a call, double press button to mute, press again to cancel.


Flashlight Button Operation

Press once to
turn on Bright
Flashlight




Press again to change
Lighting Modes:

- Bright White Light
- Warm Light
- Red Light
- Flashing SOS Light
- Power Flashlight Off




Press again, or
wait 15 mins
for auto
turn off.



Bluetooth Pairing & Connection

- A. In off status, hold the MFB for 3 seconds to enter pairing mode. LED will flash Blue and Red.
- B. On your phone, access the Bluetooth menu and select Add New Device, or search for New Device.
- C. Select STORM PLUS: ROAD
- D. LED changes to a Blue slow flash once connected, now you can begin using your headset.



Connection with Two Devices

- A. Follow **Bluetooth Pairing & Connection** to connect with first phone, then turn off the Bluetooth function of first phone.
- B. The headset will enter pairing mode automatically. LED will flash Blue and Red. Turn on the Bluetooth function of second phone to search and connect "STORM PLUS: ROAD", LED changes to a Blue slow flash once connected.
- C. Turn on Bluetooth function on first phone, click to reconnect "STORM PLUS: ROAD" from the Bluetooth list.

Headset is connected with two phones now. Expect up to 5 seconds to switch between music.



Notes:

When connected to two devices, music only plays from one device. To play music from another phone, pause or close the music on the previous phone. Perform the same process during talking status.



LED Indicator


Mode	LED Indicator
Power on	LED Blue flashes 2 seconds
Power off	LED Blue flashes 2 seconds
Pairing mode	LED Red & Blue flashes alternately
Unconnected standby mode	LED Blue flashes twice every 5 seconds
Connected standby mode	LED Blue flashes once every 10 seconds
Playing Music	LED Blue flashes once every 10 seconds
Talking	LED Blue flashes once every 10 seconds
Delete pairing record	Blue and Red LED flashes once at the same time
Low battery	Red LED Flash
Charging	Solid LED Red
Fully Charged	Blue LED Flash

Charging

Please charge the Blue Tiger Storm Plus headset at once when the Red LED flashes. Charging time is about 1.5 hours. Solid Red LED will turn off when fully charged.

Charge Connections

Please connect to the Blue Tiger Storm Plus charging port through the Type-C end of Type-C charging cable, USB end to the charger, can be used as car charger, travel charger, computer USB, etc.

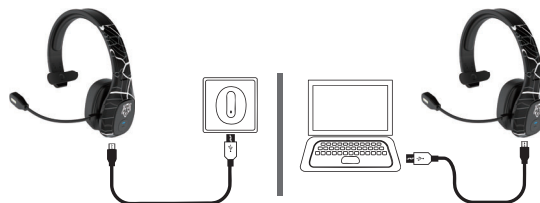



Notes:

1. Make sure your Blue Tiger Storm Plus is charged before the first use.
2. Charge your headset with the USB-C cable provided.
3. Please charge your headset at least once every 2 months when not in use.
4. Charging when powered on: it is normal for the charging indicator to shine solid Red, with a Blue flash every 5-10 seconds.
See **LED Indicator** section for frequency.
5. Charging when using headset: Connect the charging power supply (DC 5V 500mA) first, then turn on your Blue Tiger Storm Plus. Please note: it is not recommended to use the headset frequently when charging, as it may affect the life of the battery.
6. While on a voice call and your volume exceeds 85db, you will hear a voice prompt "Exceeding Safe Volume Level". While listening to music and volume exceeds 85db, you will hear a beep to let you know that you have exceeded the safe volume level recommended by the Occupational Safety and Health Administration.



TTS Tone

Power on	Blue Tiger Storm Plus On
Enter pairing mode	Pairing
Paired successfully	Paired
Connected successfully	Your headset is connected
Disconnect	Your headset is disconnected
Power off	Power off
Microphone mute on	Mute on
Microphone mute off	Mute off
Low Battery	Battery Low
Volume above 85db	Exceeding Safe Volume Level



Product Specifications

Bluetooth Version	V5.2
Bluetooth Chipset	BT8926B2
Frequency Range	2.402GHz-2.480GHz
Operation Range	Up to 200 feet
Bluetooth Protocols	HSP, HFP, AVRCP, A2DP
CODEC Code	AAC, SBC
Standby Time	400 - 800 hours
Talk/Music Play Time	Up to 45 hours
Charging Time	Approx. 1.5 hours
Battery Capacity	400mAh/3.7V
Working Temperature	14 °F to 131°F
Headset Net Weight	160g (approx 5.6 ounces)
Headset Dimension	188.72 x 150.03 x 59.68 mm (7.43 x 5.9 x 2.35 inches)

Notes: *Actual use time will differ from environment and music.



Attention and Q & A

A. How do I reconnect if the headset fails to reconnect?

Once Blue Tiger Storm Plus is connected with your mobile phone successfully, it will search and reconnect the paired device automatically when powered on. If repairing fails, please attempt to pair and connect again. If a device is not paired to Blue Tiger Storm Plus for 15 minutes, it will power off to preserve battery life. Simply hold the MFB to turn the headset back on, and attempt to pair in the Bluetooth setting on your phone. Storm Plus will enter re-pairing mode for around 10s to connect to the last device- if it fails, it will enter pairing mode and attempt to pair to nearby devices by showing a list to choose from.

B. How do I delete paired records?

In pairing mode, hold the MFB and Volume Buttons for 5 seconds to clear the pairing record. The indicator Blue and Red LED is on for 1 second at the same time; that means the pairing record has been cleared, and your Blue Tiger Storm Plus will not connect the connected device. When there are connection problems, try clearing the pairing record first.

C. What devices can charge the headset?

Any car charger, power bank, PC, etc, which meet DC 5V charging current at more than 500mA, can be used to charge this item.

D. What's the password for pairing?

Some connection devices require a password for pairing, please try 0000 or 8888 or 1111 or 1234.



E. If you experience your device not powering on, or having an abnormal connection etc:

Please try charging to reset: press and hold the MFB, plug in charging cable to charge, this will reset the headset to power off, it can be used normally once powered on.

F. Will the headset power off automatically?

Blue Tiger Storm Plus will power off if it does not connect to any devices for over 15 minutes, or if the battery voltage is less than 3.1V.

G. How do I operate the three-way calling function?

Incoming call during a call, press the MFB once to answer the new call and hang up the current call.

Incoming call during a call, double press the MFB to answer the new call and keep the current call.

Incoming call during a call, hold the MFB for 2 seconds to reject the new call.

Double press the MFB to switch between both calls.



Industry Leading Customer Support

At Blue Tiger, we stand behind our products. We believe that our customer service does not end when we process your payment, but it continues for as long as you use our headset.

One-Year Manufacturer's Warranty

(1) Blue Tiger warrants that your product will be free from defects in material and workmanship for one year from the date of purchase. If, during the first year from the date of purchase, your product fails to work due to a defect in material or workmanship, Blue Tiger will repair or replace the product, at its election, free of charge. Without proof of purchase, the warranty period begins on the date of manufacture. Consumable components (for example, cushions and battery) are not included in this one-year warranty.



(2) The foregoing limited warranty does not cover equipment failure attributable to accident, improper operation, misuse, abuse, or any cause other than defects in the materials or workmanship of Blue Tiger products.

(3) Blue Tiger obligations under this warranty are limited to repair or replacement (at our option) of any defective part returned to Blue Tiger at the customer's expense. Returned products require a Return Authorization that may be obtained by calling 800-935-1165 or visiting BlueTigerUSA.com. Products returned to Blue Tiger for repair under this warranty will be return shipped to the customer at Blue Tiger expense.



(4) THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not permit the exclusion of implied warranties and the foregoing exclusions may not apply to you.

(5) In no event shall Blue Tiger be responsible for any other damages whatsoever, including direct, indirect, special, incidental, consequential, or other damages for breach of this or any other warranty, expressed or implied.

Blue Tiger is a trademark of Blue Tiger USA, LLC.



Model: Storm PLUS

FCC Compliance Statement

NOTE: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is



encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the product.

**ISED Compliance Statement**

This device contains licence-exempt transmitter(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause

undesired operation of the device.

L'émetteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

**RF Exposure Compliance Statement**

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Cet équipement est conforme aux limites d'exposition aux radiations IC CNR-102 établies pour un environnement non contrôlé. Cet émetteur ne doit pas être situé ou fonctionner conjointement avec une autre antenne ou un autre émetteur.

RF exposure statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Déclaration d'exposition RF:

L'appareil a été évalué pour répondre aux exigences générales d'exposition aux RF. L'appareil peut être utilisé dans des conditions d'exposition portable sans restriction.

