


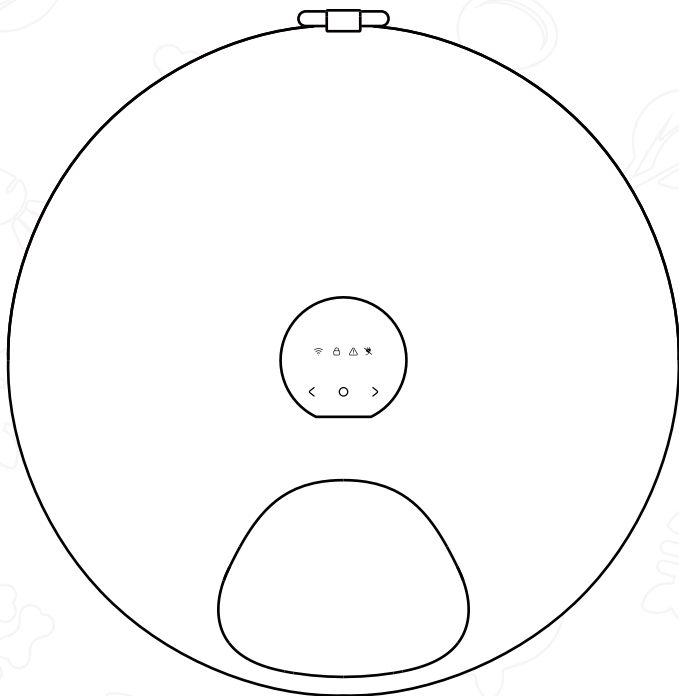

User manual

Donut Frost

WIFI 6-Meal Automatic Pet Feeder

Please follow the steps in this manual to install the machine and keep this manual for further guidance.

This guide details the functions and steps of the Pet Feeder.

CONTENTS

SAFETY GUIDELINE 01

WHAT’S IN THE BOX 02

SPECIFICATION 02

GETTING TO KNOW YOUR PET FEEDER 03

USE INSTRUCTION 04

APP SPECIFIC OPERATION 07

CLEANING & MAINTENANCE 11

FAQ 13

SAFETY GUIDELINES

ⓘ **Device placement**

1. Pet feeder should be placed on a level surface. Do not place or store an appliance where it can fall or be pulled.
2. Only for use indoors, away from areas of direct sunlight or moisture.
3. Do not expose the feeder to temperatures below 0°C (32°F).
4. Do not place any foreign objects in the feeder.
5. Make sure there are no objects on and around the food bowl that would prevent pets from eating normally.

⚠ **Important Safety Information**

1. Make sure the power supply is securely plugged in to ensure the feeder functions properly.
2. This product is only suitable for cats and small dogs.
3. Do not allow small children to play with, in, or around the feeder.
4. Do not consume the fillings of the ice pack. If the pack is damaged, do not use it.
5. Do not submerge control board in water at any time, as this may damage electronic components.
6. Do not disassemble the pet feeder beyond its individual components.
7. Do not place or store in a tub or sink.
8. Do not get the charging port wet. If the charging port gets wet, it should be allowed to fully dry before charging.
9. The feeder only supports charging with 5V 1/2A adapters.
10. Always unplug the feeder when not in use. If storing for over six (6) months, the device should be fully charged beforehand.
11. Do not allow pets to chew on or swallow any part of the device.
12. Do not use the pet feeder for any purpose other than feeding pets.
13. APP connection has to be plugged in adapter, unless WIFI function will stop work.


WHAT'S IN THE BOX

Item	Quantity
Pet Feeder	1
Ice Pack	2
Type-C Cable	1
User Manual	1
Adapter	1


SPECIFICATION

Material	Food Grade ABS、PP
Battery Capacity	1800mAh
Food Appliance	All types of pet food
Capacity	200ml x 6 (85 - 90 g Per Day)
Charge Voltage	Type-C 5V 1/2A
Rated Power	1W
Dimension	320mm x 327mm x 87mm/12.6" x 12.8" x 3.4"
NW	1.3KG/2.86lb
Networks	2.4Ghz WIFI

GETTING TO KNOW YOUR PET FEEDER

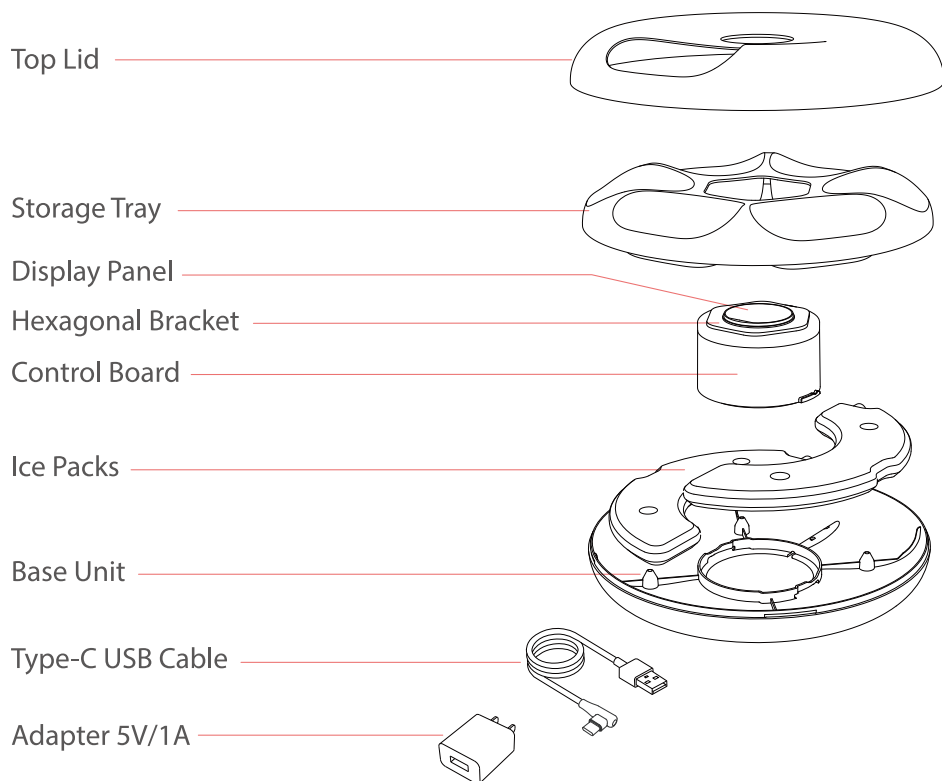


Display Pannel

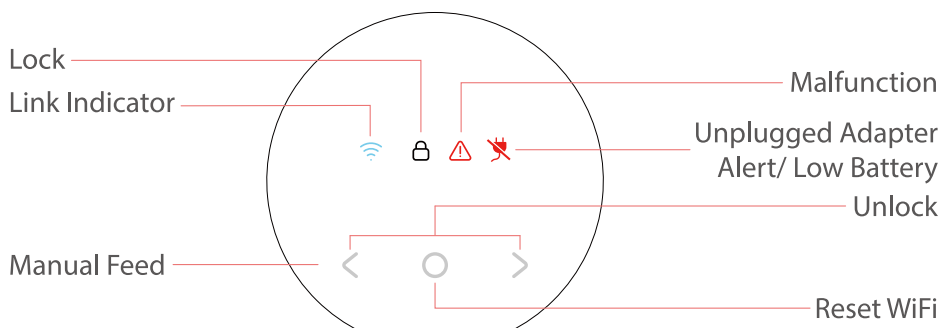

INSTRUCTIONS FOR USE


Open the Lid

Place the feeder flat on a surface, pull the ring lock on the back of the feeder upward with one hand, and lift the entire Top Lid.

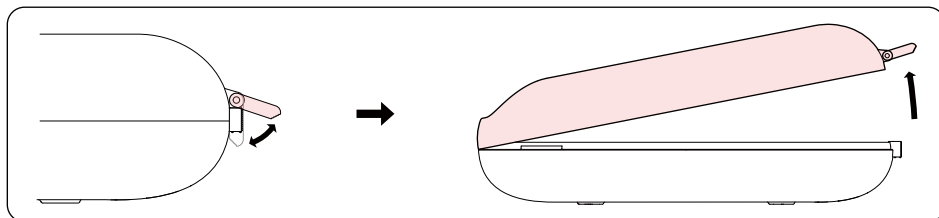

Insert the Ice Packs

Place the Ice Packs horizontally in your refrigerator's freezer at around -18°C for at least six (6) hours. Then, insert the frozen packs into the feeder to keep wet food fresh.

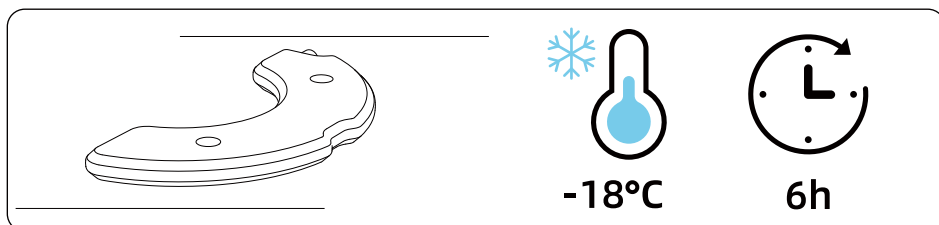


* Note:

- Do not freeze the Ice Packs while they are vertically situated, as this will cause them to bulge and become misshapen.
- There is no need to use the Ice Packs for dry pet food.
- The freshness preserved by the use of the Ice Packs can also be affected by exterior environmental factors.
- The Ice Packs are for reasonable use with canned food, fresh food, and other perishable food that benefits from low-temperature preservation.
- Freeze-dried food and other forms of dry pet food do not need low temperatures to stay fresh.

INSTRUCTIONS FOR USE

Fill the Food Supply

- ① Place the storage tray into the Base Unit, and then fill the bowl(s) with pet food.
- ② Cover the Top Lid and lock it.



Wet Food
(85 g per bowl)



Dry Food
(85 g–90 g per bowl)

*** Note:**

- Avoid storing too much fresh food in the device, as the surplus fresh food can lead to odors and insects.
- While filling the food supply, please give priority to foods with short shelf lives, such as canned and fresh food.

Download the App & Log In

- Scan the QR code or search for "Smart Life" on App Store or Google Play to download the app.
- Sign up or Log in to your account.



Google Play



App Store



*** Note :**

Only 2.4Ghz is allowed and 5Ghz or mixed frequency is not fit for this device.

INSTRUCTIONS FOR USE

Unlock the Display

Press the "<" and ">" button for 3 seconds at the same time to unlock the display, and then the screen will light up.

Press the "<" and ">" button for 3 seconds at the same time again to lock the display, and then the screen darkens and the lock indicator will light up.

Instant Feed

Unlock the display, long press "<" button to do instant feed once.


Reset WiFi

Unlock the display, long press "○" button for 10 seconds to reset WiFi.

Indicator Information


	Off	No Power / By Batteries
	Blue Solid	Device Connection Successful
	Orange Slow Flash	Device Connecting
	Orange Quickly Flash	WiFi Connecting/Device Offline
	White Solid	Control Lock
	Red Flash	Device Abnormal
	Off	Power by adapter
	Red Solid	Unplugged Adapter Alert
	Red Flash	Low Battery

APP SPECIFIC OPERATION

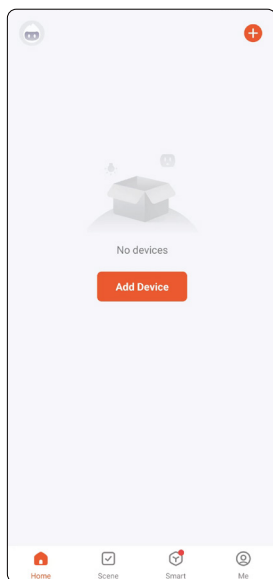


01

Open your phone's bluetooth, download the app and sign in with your exclusive account.

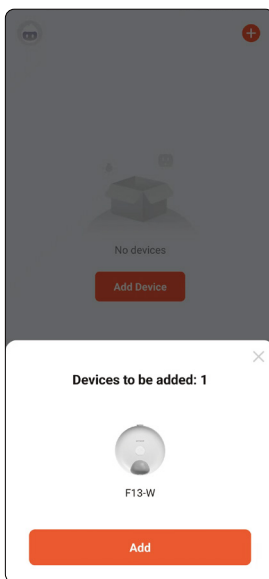

02


After entering the interface, if the device automatically discovers Click "Add", go to step 5.

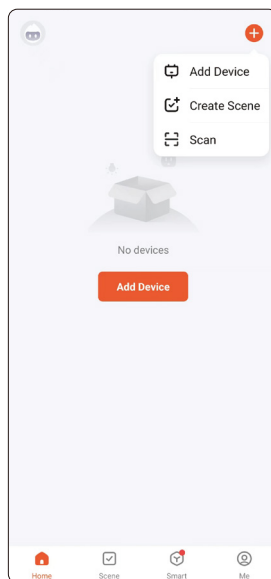

03


Or you can click "+" in the top right corner and click "Add Device".

APP SPECIFIC OPERATION

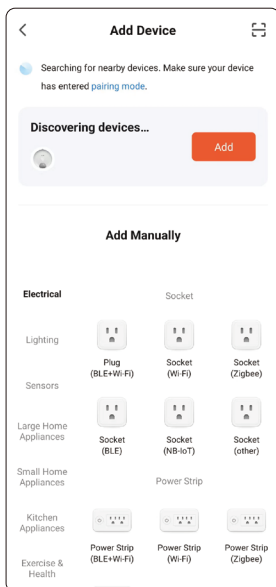


04

After entering the interface, wait for the device to be discovered automatically and click "Add".

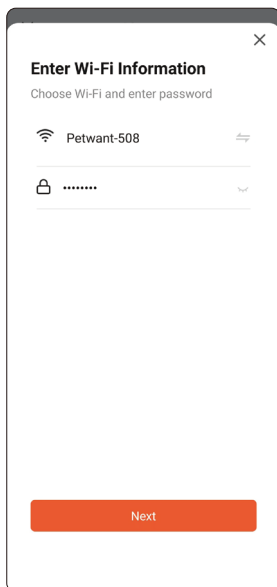

05


Input WiFi password (user name cannot use Chinese, password cannot take special symbol).

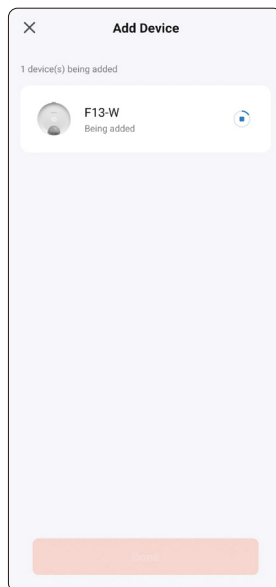


06

Waiting to connect to the network.


APP SPECIFIC OPERATION

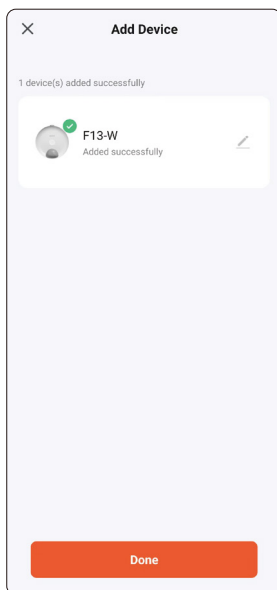

Add successfully, you can customize the device name, click "Done".

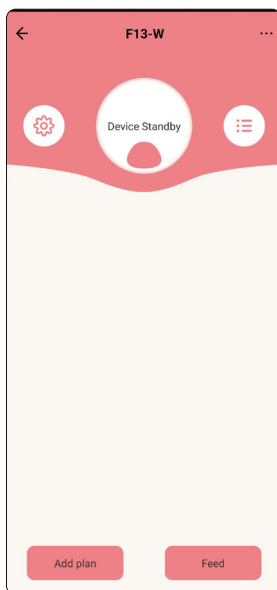


Click "Feed" to feed a meal immediately. Click "Add plan" to set the feeding plan.

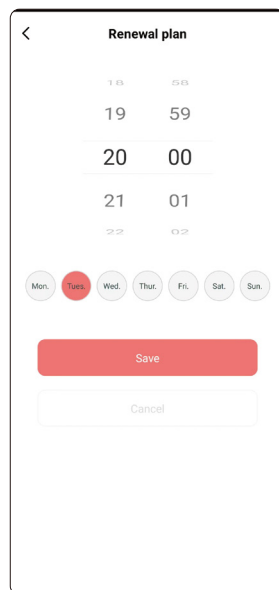


You can set the time according to your pet's eating pattern. You can choose from Monday to Sunday and click "Save".

APP SPECIFIC OPERATION

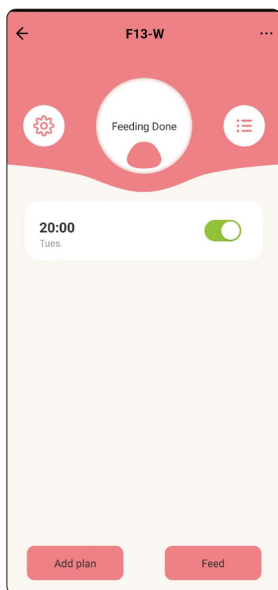


10

You can delete or add plans, but you can set up 5 meals. (*)

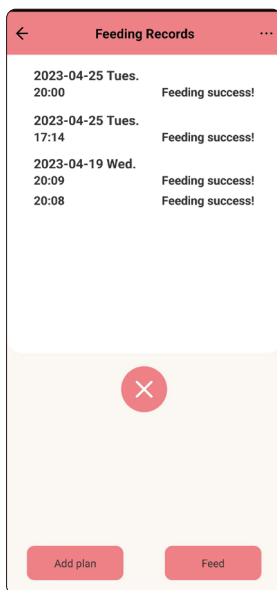

11

You can check the feeding records at any time.

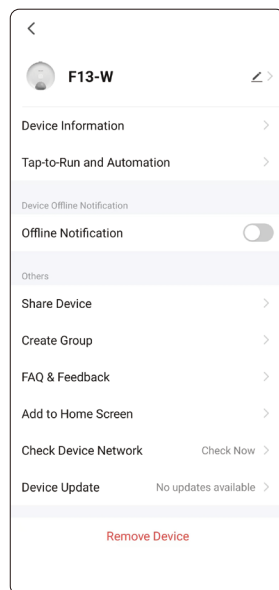

12

In the Settings menu, you can click "Share Device" to share the device with multiple people.


(*) It only seems to allow me to program 5 meals?

The exposed compartment is meal No.1, which can't be programmed. And you can program the other 5 meals, which are in the 5 compartments that are unexposed.


CLEANING & MAINTENANCE

Clean product interior and food bowl

- ① Rotate the control board clockwise, and take it out.
- ② All parts are washable except the control board. Do not use metal stuff for cleaning to avoid damaging the product surface.



①

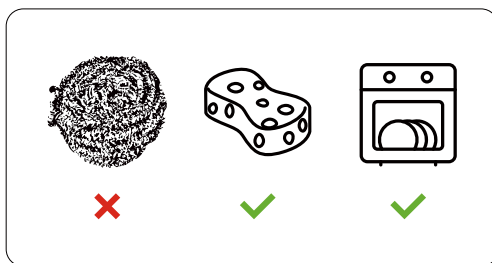

②

Clean the Control Board

Take out the control board, wipe the outside with soft wet cloth.

* Note:


The control board is not waterproof and can not be washed.




CLEANING & MAINTENANCE

Install the Control Board

- ① Align the control board buckle with the bottom housing installation slot, hold and rotate it counterclockwise to hear a “click” sound.
- ② Check whether the control board is installed in place.



①

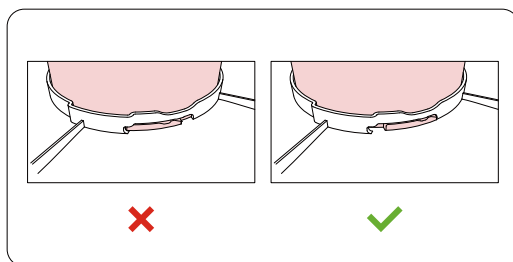

②

* Note:

If the control board is not installed properly, the food bowl will be misaligned and then the feeder can't work properly.

FAQ

Fault Symptom	Cause Analysis	How to solve it
Display OFF	No Power	Charge asap
	No Power ON	Turn on the switch on the device button
	Device Abnormal	Contact after-sales
Misaligned Food Bowl	Main board installed improperly	Check if the main board installed properly
	Device Abnormal	Contact after-sales
Device Abnormal	Impurities inside food tray	Clean the impurities inside of food tray
	Photoelectric sensor faulty	Contact After-sale Service
	Motor faulty	Contact After-sale Service
Device Offline	Device is in battery mode	Check if power cut or power adapter is fixed properly
	Network abnormal or something wrong with wifi	Please check if the WIFI is normal and re-connect the pet feeder
	Mainboard Defective	Contact After-sale Service



iPettie

MADE IN CHINA



This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.