

PRODUCT

Warranty Card

User name: _____

Purchase channel: _____

Purchase time: _____

Product issue: _____

Contact information: _____

Delivery address: _____

Warranty coverage:

- Failure of headset speaker, microphone, or charging base
- Headset cannot be powered on/off, or function keys are unresponsive.

Not covered by warranty:

- Damage to ear cushions or leather ear cups.
- Headset not used according to instructions or disassembled by user.
- Physical damage including impact, liquid immersion, or cable pulling

Certificate of
Product Conformity

Inspector:

Date:



**Wireless headset designed for
simultaneous use with two devices**

**Easily meets unified communication needs for
office, video teaching, gaming and other scenarios**

Wireless Noise-Cancelling Headset

| USER MANUAL




Please read this manual carefully before use

Product Overview

Wireless noise-cancelling headset: can connect to both wireless computer devices and Bluetooth mobile devices, achieving simultaneous online use of two devices, and seamless switching.

Introduction

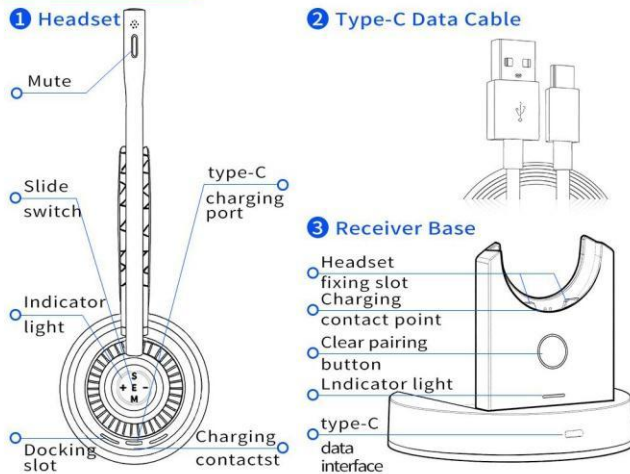

Indicator Light Status

	Display status	Equipment status
Receiver Base Indicator Light	Red and blue lights flashing	Search device
	Blue lights double flash	Computer working condition
	Blue light always on	Standby state
	Blue light slow flash	Disconnected state
Headset Indicator Light	Green light short flash	Clear pairing
	Green light slow flash	Work status
	Green light slow flash	Standby state
	Red light always on	Silent state
	Red light always on	Charging state

Product Overview

Wireless Pairing with Computer:

1. Connect the base to your computer's USB port using a data cable. The indicator light on the base will flash red and blue rapidly, entering the search and pairing mode.
2. Press and hold the E key on the headset for 3 seconds to power it on. Wait for automatic pairing. When you hear the prompt "Computer connected" from the headset, the pairing is complete.

Re-pairing:

1. Press and hold the clear pairing button on the base for 3 seconds. The base's red and blue lights will flash rapidly, entering the re-search state.
2. Gently push the S function key on the headset for 3 seconds. You will hear the prompt "Cleared successfully" from the headset. Wait a few seconds for the pairing to complete automatically.

Bluetooth Pairing with Mobile Phone:

Bluetooth activates automatically when the headphones power on. Bring your Bluetooth device close to the headphones, search for the device name "Headphone" and complete the pairing connection.

Key Function

Key	Status	Operation	Bluetooth Mode	Computer Mode
E	Call	Short press	Answer/End call	Answer/End call
	Music	Long press 3"	Power on/off	Power on/off
		Short press	Play/Pause	Play/Pause
S	Any	Long press 3"	Clear Pairing	Clear Pairing
M		Short press	Mute	Mute
+		Long press	Volume up	Volume up
		Short press	Next track	Next track
—		Long press	Volume down	Volume down
		Short press	Previous track	Previous track
Mute		Music	Long press	Play/Pause
	Call	Long press	Answer/Hang up	Answer/Hang up
		Short press	Mute	Mute
		Double-tap	Redial Last Call	/

Charging Method

1. Connect the receiver base to the computer, place the headphones in the U-shaped slot of the base, and align the contacts for charging.
2. Use a Type-C data cable to connect to the charging port at the bottom of the headphones for wired charging.

Prompt Tones

	Prompt tones	
Computer equipment	Computer connected	Device disconnected
Bluetooth device	Bluetooth connected	Device disconnected
Power on/off	Power on	Power off
Microphone Mute Prompt	Unmuted	Muted
Pairing Cleared	Pairing Cleared	
Low battery prompt	Low battery	

Parameters

Equipment name	Headphone
Headset mode	Bluetooth (Dual-mode)
Bluetooth version	6.0+EDR
Noise reduction method	ENC(Environmental Noise Cancellation)
Rated power	30 mW
Horn unit	Dynamic Neodymium Speaker
Speaker size	30 mm
Horn impedance	32 Ω
Loudspeaker sensitivity	116±3 dB
Loudspeaker frequency response	50-20K Hz
Microphone directivity	Single direction
Microphone sensitivity	-42±3 dB
Microphone signal-to-noise ratio	60 (Min)
Microphone impedance	2.2K (Max)
Charging interface	type-C
Battery capacity	250mAh lithium polymer
Charging time	≤1 h
Battery life	≤20 h
Standby time	≤120 h
Bluetooth transmission distance	≤15 m

FCC Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help
- important announcement

Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.