


A4 TATTOO STENCIL PRINTER

User Guide

M8

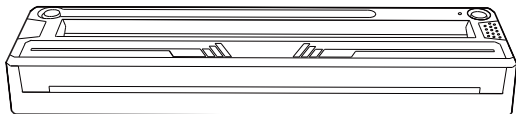

Read the instructions carefully before use.

Safety Instructions

Precautions

- Keep the printer out of the reach of children.
- Place the printer away from environments with high humidity, dust, or other conditions that may damage the device.
- If the print head overheats after printing, do not touch it directly.
- To prevent electrostatic damage to the print head, do not touch this component.
- To ensure print quality, do not print continuously for an extended period.
- Do not attempt to disassemble or repair the device by yourself.

Power Usage Safety

- Do not forcefully plug in or pull out the power cord, nor bend it excessively.
- Disconnect the power supply in a timely manner after charging is complete.
- Use the original power cord for charging to avoid risks of overheating, fire, or even burnout of the printer.
- Do not charge the printer in a high-temperature environment.
- When the printer is not in use for a long time, keep it in an unpowered state.

What's in the Box

Machine × 1


Tattoo Transfer Paper × 10

Thermal Paper (Letter Size) × 10

Specifications

Printing Method	Thermal
Printing Speed	20 mm/s
Input Power	DC 5V, 2A
Battery Capacity	1500 mAh
Effective Printing Width	210 mm
Supported Connections	USB, BT
Operating Conditions	5 °C ~ 50 °C , 20% ~ 85% RH (Non-condensing)
Storage Conditions	-20 °C ~ 60 °C , 5% ~ 95% RH (Non-condensing)

Product Overview

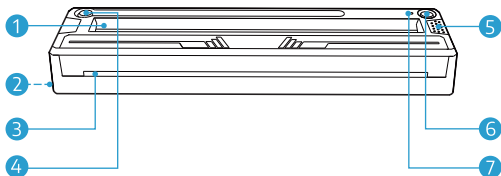

1 Paper Inlet

2 Type-C Port

3 Paper Outlet

4 Limiter

When printing custom-sized paper, place the paper against the right side of the paper feed opening and use the paper limiter to secure its position.

5 Cover Open Switch

Press to open the printer's paper path.

6 Button

Long Press	Power on/off
Short Press Once	Feed paper 50 mm
Short Press Twice Consecutively	Print self-test page

7 Status Light


Solid Red	Charging
Red Off	Charging completed
Blinking Blue	BT waiting for connection or connection failed
Solid Blue	BT connected

App Download and Connection

Download & Install

You can download the application by:

Searching "TATTOO PRT" on the
Apple App Store



Searching "TATTOO PRT" on Google Play or scanning the QR code



BT Connection

1. Enable BT on your phone and grant the app permissions:
 - **iOS:** Allow "TATTOO PRT" access.
 - **Android:** Enable BT & Location, then allow app access.
2. Hold the power button to turn on the printer, open the app, and tap [Connect Device].
3. Select the printer named "M8" from the device list to complete the connection.


Driver Installation

1. Scan the QR code or copy the link into your browser to download the driver.


<https://offnova.com/pages/download>





2. Connect the printer to your computer using a Type-C cable, then insert the tattoo paper.





3. Run the driver software "Printer Driver". On the pop-up page, select the printer type as "A4 Printer", click "USB Port Check", and then click "Start Install".

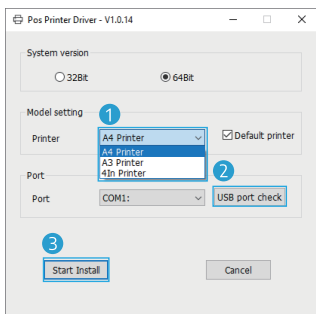


4. After installation is complete, the A4 Printer Properties page will appear. Click "Print Test Page" to send a printer test page. A successful print indicates the driver has been installed successfully.

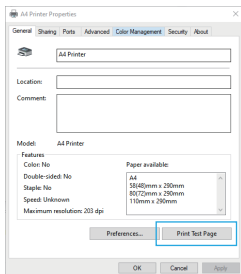


Tattoo Transfer Paper Installation Guide

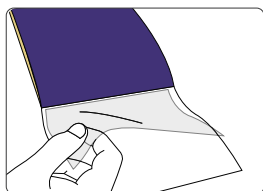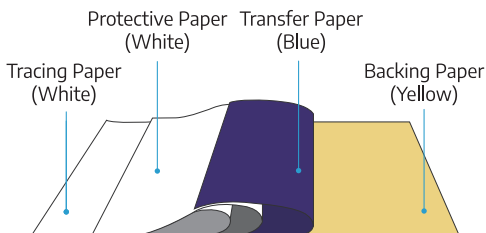


- ① Prepare the four-layer transfer paper and remove the white protective paper.

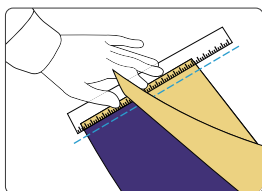

- ② Trim off the yellow backing paper, being careful **not to** damage the adhesive layer.

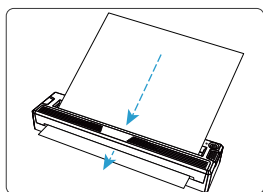

- ③ Insert blue transfer paper face down, then start the printer for automatic feeding.

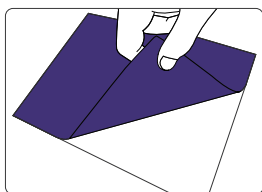


- ④ After printing is complete, peel off the blue transfer paper.



Note:

Due to variations in material hardness at the top edge of different transfer papers, always smooth and center the paper in the feed slot to prevent jamming or sticking during printing.


Folded Paper/Paper Roll Installation Guide

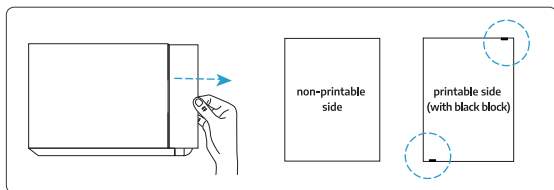

- 1 Insert the thermal paper with the printable side facing down, then start the printer for automatic feeding.

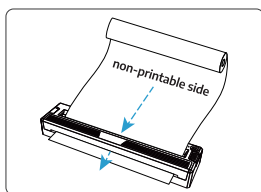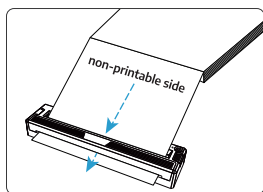

- 2 After printing is complete, peel off the paper.

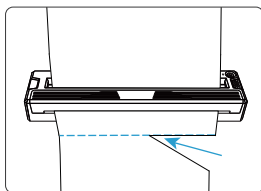

Note:

When printing non-tattoo patterns, please choose whether to disable mirror printing as needed. Otherwise, a mirrored effect will be produced by default.

Troubleshooting

Problem	Possible Causes	Solutions
No pattern after printing	1. The transparent protective film on the transfer paper was not removed. 2. The transfer paper was placed incorrectly.	1. Remove the transparent protective film from the transfer paper. 2. Reload the transfer paper correctly according to the instructions.
Blurry printing	Poor quality consumables.	Please use high-quality consumables.
Printer turns off automatically or prints intermittently	Battery depleted.	Charge the printer in time.
Printer won't turn on/off properly or keys are unresponsive	Has not been reset for a long time.	Locate the "RESET" hole on the bottom of the device, and use a tool to press the reset button (to complete reset).

FAQ

Why can't I connect to the printer via BT?

A: Please connect the printer through our official app instead of directly through your phone's BT settings.

Why is the printout blank?

A: This printer uses thermal printing technology and only supports thermal paper. Thermal paper is single-sided, so please ensure you print on the correct side.

Where can I safely download the computer drivers?

A: We provide official drivers for both Windows and Mac systems. You can securely download them from the following link:

<https://offnova.com/pages/download>

How can I flatten curled paper after printing?

A: Roll paper is designed for easy loading and quick printing, making it suitable for drafts, receipts, and informal documents. It is normal for slight curling to occur after printing. If you need flat documents for formal use, we recommend using folded paper.

For more FAQs

To access the latest FAQs, please visit our official FAQ page or scan the QR code below:

<https://offnova.com/pages/download>



FAQ

Tattoo Stencil Printer(M8)



FCC Warning Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

* RF warning for Mobile device:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.



Customer Service E-mail:
support@offnova.com