

C R O W N F U L

ELECTRONIC KITCHEN SCALES

INSTRUCTIONS MANUAL

Model: EK4360

Web: www.crownful.com

E-mail: support@crownful.com




ISO 9001 CERTIFIED BY SGS

■ MAIN FUNCTION


1. With high precision load cell.
2. Water & milk volume measuring function.
3. Low battery and over loaded warning function.
4. Zero & tare function.
5. Auto off function (2 minutes).
6. Max Capacity:5KG/11LB
7. Division:1g/0.1oz

■ TO REPLACE BATTERY AND CHARGE



2 x 1.5V (AAA) batteries (included)
Open the battery cover. Install new batteries by putting one side of the battery down first and pressing down the other side.
(Please observe the polarity)

■ LCD ICON INDICATION

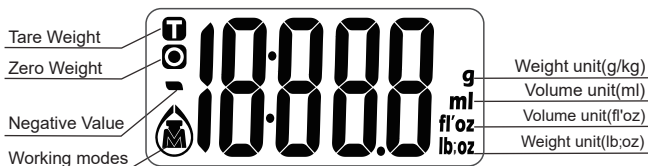

Weight mode



Milk volume mode



Water volume mode

Note: When the weight of the item is less than 1000g, the unit of the electronic scale will display "g"; when the weight of the item is greater than 1000g, the unit of the electronic scale will display "kg".

■ BUTTONS FUNCTION


UNIT CHANGING
BUTTON:

UNIT


ON/OFF, ZERO,
TARE BUTTON:



ZERO

Note:


Buttons **UNIT** and  **ZERO** are indicated in this manual.


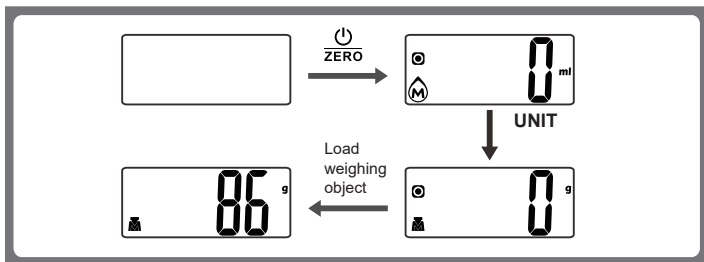
■ WEIGHING



1. Place the scale on a solid and flat surface. Place bowl (if any) on the scale.
2. Press  **ZERO** to turn on the scale.
3. Start weighing when LCD shows "0". Press **UNIT** button to convert to weighing mode.
4. Load weighing object on scale(or bowl) to start weighing. LCD will show the weight reading.
5. If the weighing object is liquid, press the **UNIT** button to convert the scale to water or milk volume mode, it will show the volume.

■ VOLUME MEASURING

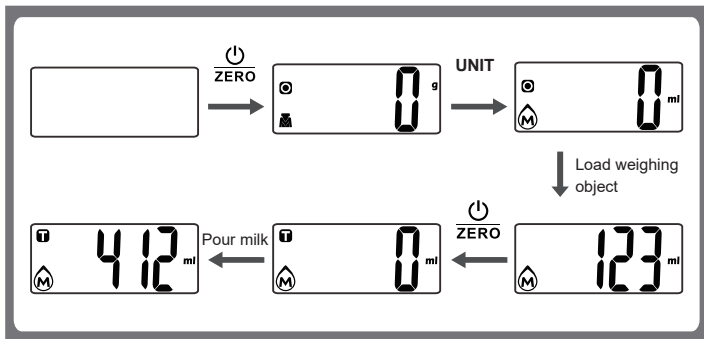

1. Place the scale on a solid and flat surface.
2. Press  **ZERO** button to turn on.
3. Press **UNIT** button to convert the mode to water or milk volume mode when LCD shows "0".
4. Put a container onto the scale platform, LCD shows the weight of the container.
5. Press  **ZERO** button for Zero or Tare.
6. Pour liquid (water or milk) into the container, LCD shows the volume of the liquid.

■ UNIT TRANSFER


After turning on the scale, press the **UNIT** button to switch to the unit you want.


Easily switch between 7 different units:

lb; oz, fl oz, milk fl oz, g, kg, ml, milk ml.

NOTE: The unit system of the scale depends on the distribution location or the distributor's requirement.



■ ZERO & TARE FUNCTION

To weigh different loads consecutively without removing loads from the scale is: First, you need to load the scale and get the weight reading. Then, press the  button to reset the LCD reading to "0" before adding the next load. You may repeat this operation.



Condition 1: "ZERO" function

When total sum of all loads on scale $\leq 4\%$ of scale's max.weight capacity:

LCD will show ---- or 0g each time  is pressed. ---- means not stable, please wait for a moment. 0g and meanwhile an icon  on the LCD mean ZERO function is activated. Max.weight capacity remains unchanged.



(For example:

When capacity is 2000g, 4% is 80g;

When capacity is 5000g, 4% is 200g)

Condition 2: "TARE" function

When total sum of all loads on scale $> 4\%$ of scale's max.weight capacity:



LCD will show ---- or 0g each time  is pressed. ---- means not stable, please wait for a moment. 0g and meanwhile an icon  on the LCD mean TARE function is activated. Max.Weight capacity is reduced by total weight of all loads.


(For example:

When capacity is 2000g, 4% is 80g;


When capacity is 5000g, 4% is 200g)

Under this condition:

By pressing , you can see the total weight of all loads on the scale. If you want to weigh more loads, just press  to reset LCD reading to '0' again.

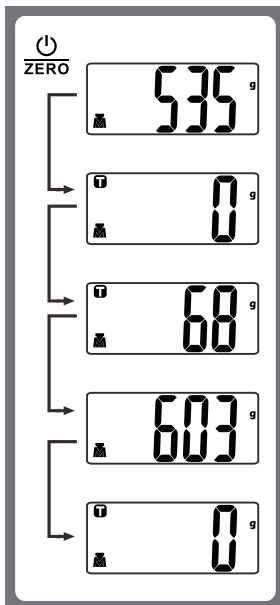



■ AUTO OFF (BATTERY POWER SAVING MODE)




If there is no operation or weight changes in two minutes, the scale will automatically turn off.

■ MANUALLY SHUT OFF




To maximize the battery life, always turn off the scale after using by long-pressing the  button.

■ HOW TO DISTINGUISH BETWEEN lb and oz?



When you set the mode to lb;oz, put the object you want to weigh, lb is displayed before the “:”, and oz is displayed after the “:”.

■ WARNING



OVER LOADED WARNING

When LCD shows Err, it is over loaded(Max capacity is shown on product), please take off the loads to prevent damage to the scale.

LOW BATTERY WARNING

When LCD shows Lo, battery power is low, please replace with new battery (ies)

⚠ USE&CARE INSTRUCTIONS

1. Clean the scale with slightly soft cloth.DO NOT immerse the scale in water or use a chemical/corrosive cleaner.Keep the scale in a cool dry place.
2. Always use the scale on a solid,flat surface.Keep the scale in a steady position when weighing.
3. This product is precision instrument,please handle with care.Do no strike, shake or drop the scale.
4. If it fails to turn on,please check whether the batteries are installed or the batteries' power is low.
5. Keep away from high temperature areas or objects and do not strip the scale arbitrarily.
6. Designed for home use only,not for commercial use.
7. Always allow the scale to acclimate to normal room-temperature before using.
8. Make sure that the scale is placed on a flat surface.Uneven or little surfaces may contribute to inaccurate results.
9. Dirt,dust,vibration,wind,air-currents and electromagnetic interference may result in inaccurate results.
10. Avoid exposure of the device to extreme heat or cold and damp environment.
11. DO NOT exceed the 11lb/5kg rating as doing so might permanently damage the device and/or the sensor inside.

CAUTION: DO NOT submerge the device in liquid.All plastics parts should be cleaned immediately after contact with fats, spices,vinegar and strong flavored/colored foods.(Avoid contact with acids like citrus juice.)

Customer Support

Should you encounter any issues or if you have any questions regarding your new product, feel free to contact our helpful Customer Support Team. Your satisfaction is our goal!
Email: support@crowndful.com

Support Hours

Monday - Friday: 9:00 am - 5:00 pm PST



Scan to Follow Us



@crowndful.official

Website: www.crowndful.com