

Visit Our Website



SCAN ME
PyleUSA.com

PYLE

PyleUSA.com



Portable Bluetooth Karaoke Speaker System

USER GUIDE

**READ ALL INSTRUCTIONS CAREFULLY BEFORE USING THIS PRODUCT.
RETAIN THIS OWNER'S MANUAL FOR FUTURE REFERENCE.**

FEATURES:

- Karaoke & Music Streaming Speaker System
- Compact, Portable & Powerful
- Bluetooth Wireless Audio Streaming
- Built-in Rechargeable Battery
- Flashing DJ Party Lights
- FM Radio with Digital LCD Display
- USB Flash & Micro SD Memory Card Readers
- MP3 Digital Audio File Compatibility
- Audio File Recording Mode
- (2) 1/4" Microphone Inputs
- Microphone Priority Talk-Over Function
- Includes Wireless Handheld Microphone
- Headphone Jack
- Aux (3.5mm) Input
- Connect & Stream From External Devices
- Full Range Stereo Sound Reproduction
- Impressive Bass Response
- Top Panel Button Control Center
- Rugged & Heavy Duty Design
- Convenient Carry Handle & Rolling Wheels



BLUETOOTH CONNECTIVITY:

- Built-in Bluetooth for Wireless Streaming
- Works with All of Your Favorite Devices
(Smartphone, Tablet, Laptop, Computer, etc.)
- Bluetooth Network Name: 'PyleUSA'
- Bluetooth Password: '0000'
- Bluetooth Wireless Range: 65'+ Ft.
- Bluetooth Version: 2.0

⚠ WARNING: Cancer and Reproductive Harm - www.P65warnings.ca.gov

AUDIO RECORDING:

- It's Easy: One Button Recording Activation
- Record Audio as Streamed through the Speaker System
- Ability to Record Vocals via Microphone
- Records to USB Flash or Micro SD Card
- Audio File Type Created: .mp3
- Easy Transfer to PC & Mac

WHAT'S IN THE BOX:

- Karaoke Speaker
- Wireless Handheld Microphone
- Audio Connection Cable
- Wall Power Adapter
- Remote Control

TECHNICAL SPECS:

- Power Output: 500 Watt MAX
- Sound System: 8" Speaker, Dual 3" Tweeters
- Impedance: 4 Ohm
- Sound Distortion: <1.0%
- S/N Ratio: 85dB
- Max. USB/SD Memory Card Support: 32GB
- Rechargeable Battery: 3.6V Li-iOn, 2000mAh (7.2Wh)
- Power: 100/240V, DC 12V Adapter



IC warning

- English:

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

(1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

- French:

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes:

(1) L'appareil ne doit pas produire de brouillage; (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20cm de distance entre la source de rayonnement et votre corps.

ATTRIBUTES

1. Ultra-large magnetic circuit high-sensitivity speaker with high penetrating power, low-frequency shock, and perfect medium-/high-frequency representation.
2. The latest decoding chips supporting stable playback of MP3 up to 32GB USB/ Micro SD card.
3. **FM radio reception:** high-quality digital radio with automatic channel search and storage of up to 60 channels.
4. 3.5mm AUX audio input for easy connection to a wide range of sound sources.
5. Built-in high-capacity battery for consecutive playback of up to 2 hours.
6. Connect the microphone, adjustable reverberation, voice, and Karaoke function to present outstanding performance.
7. Battery with built-in recharging protection to ensure a long and stable service life.
8. Built-in low battery and full recharging indication.
9. Belt/handle design for easy transportation and high mobility.
10. Outputs to earphones or external sound sources.
11. Record your favorite FM radio station or other AUX sound sources to enjoy the music wherever you like.
12. Microphone input recording to act as your personal business assistant.
13. Bluetooth function.

RECORDING

Recording via External Microphone:

Connect a storage device (USB/Micro SD card) and short press the RECORD key to start recording for a time depending on the storage capacity. During recording, tune the “-ECHO+” knob to the minimum. It is best that the microphone should have a proper distance away from the speaker to prevent any feedback.

Notes:

This product starts recording from the time "record" is displayed on the LED screen.

BLUETOOTH PAIRING OPERATION

1. **ON/OFF:** Switch the power to ON, press the “MODE” key to enter the Bluetooth mode, and the display screen will show “BLUE”.


2. Make sure the Bluetooth function of the mobile device is active and begin searching. Connect to the mobile device when "PyleUSA" shows. Mobile device connections do not need a password; however, if prompted, input "0000" to proceed with pairing. After successful pairing, the speaker will send out a voice prompt indicating it has successfully paired with the mobile device.
3. Play the music from your mobile device directly and enjoy.

FUNCTIONAL OPERATIONS









1. **LED Screen**
2. **Master Volume:** In MP3/FM/AUX mode, use it to regulate volume output from the speaker.
3. **Micro SD Port:** Read audio files in MP3 format in a Micro SD card with a capacity of up to 32GB (FAT32).
4. **USB Port:** Read audio files in MP3 format in a USB storage device with a capacity of up to 32GB (FAT32).
5. **⏮:** In FM receiving status, short press it to select the previous channel after a full station search has been executed.
6. **⏸:** In USB/Micro SD card reading status, short press it to play/pause, or press and hold to select one of four playback sequencing modes (All - play all tracks in sequence; ONE - repeat one track). In FM receiving status, press and hold it to


execute a full search (it is recommended to execute at least one full search before using the radio receiving function. All found stations will be saved even in power-off). In AUX input/FM radio status, short press it to toggle between mute and normal volume.

7. **▶▶**: In USB/Micro SD card reading status, short press it to go to the next track. In FM receiving status, short press it to select the next channel after a full station search has been executed.
8. **Mode/SHIFT**: Short press it to toggle between USB/Micro SD and FM receiving modes. Press and hold to toggle between the recording folder and MP3 folder.
9. **Recording/DEL**: Short press it to enable recording (USB/Micro SD storage device must be connected first). During recording, reverberation should be tuned to the minimum. Press and hold to delete a recording file. Recording in AUX or FM mode is available.
10. **EAR MIC**: Headphone/MIC port.
11. **EQ**: Environment Switching: In USB/Micro SD reading status, short press it to select an environment mode (from Square, Meeting, Home, Hall, and Personal).
12. **MIC PRIORITY**: Connect the microphone, short press the key to enter the microphone priority mode.
13. **LINE IN**: External sound source input port (plug-and-play).
14. **Microphone volume**: Microphone volume regulating knob.
15. **Reverberation**: Microphone reverberation regulating knob.
16. **Microphone input**: Microphone input jack.
17. **DC 12V recharging**: DC 12V recharging port.
18. : Press it to control the flashlight switch.
19. **Recharging indicator light**: When the charger is connected, the red light turns on. When the device is fully recharged, the blue light turns on.
20. **Power switch**: "I" - ON; "O" - OFF.
21. **TREBLE**: The control knob for treble.
22. **BASS**: The control knob for bass.
23. **IR**: Infrared remote receiver module.

CAUTION: Please be sure to charge when music is distorted.

REMOTE CONTROL FUNCTION DESCRIPTIONS

- 1. Power Button** : Short press to enter standby mode. Short press again to resume. If no device is connected, the system defaults to "BT" (Bluetooth) mode.
- 2. Mute Button** : In USB/Micro SD/FM/AUX/Bluetooth mode, short press to mute the device.
- 3. Cycle Key** : In USB/Micro SD mode, short press to toggle between four playback modes:
 - **All**: Play all tracks in sequence.
 - **RAND**: Play tracks randomly.
 - **ONE**: Repeat one track.
 - **FOL**: Repeat all tracks in a folder.
- 4. MODE**: Switch between different input sources (USB, Micro SD, FM, AUX, Bluetooth).
- 5. SCAN**: In FM mode, press and hold to perform a full search. All found stations will be saved, even when powered off.
- 6. EQ**: In USB/Micro SD/AUX/Bluetooth mode, short press to select an equalizer mode: NOR (Normal), POP, ROC (Rock), JAZ (Jazz), CLA (Classical), CVB (Custom/Bass).
- 7. TUNE -**: Without a saved station, press to adjust to the previous frequency. With a saved station, press to tune to the previous station.
- 8. TUNE +**: Without a saved station, press to adjust to the next frequency. With a saved station, press to tune to the next station.
- 9. VOL+/VOL- Keys**: In USB/Micro SD/FM/AUX/Bluetooth mode, press to increase (VOL+) or decrease (VOL-) the volume.
- 10. Rewind** (): Functions as rewind or previous track.
- 11. Play/Pause** (): Functions as play/pause.
- 12. Fast Forward** (): Functions as fast forward or next track.
- 13. Numeric Keys (0~9)**:
 - **USB/Micro SD Mode**: Input track number directly (e.g., "1" and "2" to play Track 12).
 - **FM Mode**: Input frequency directly (e.g., "1075" for 107.5 MHz).

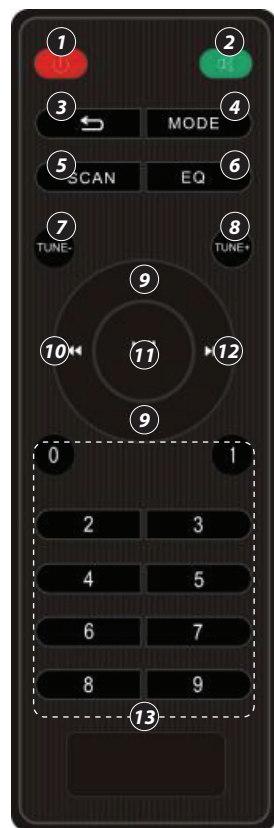

CLEANING AND STORAGE

Cleaning:

1. Ensure the speaker is turned off and unplugged before cleaning.
2. Use a soft, dry cloth to wipe the exterior of the speaker. For stubborn stains, lightly dampen the cloth with water. Do not use any harsh chemicals or abrasive materials.
3. Clean the control panel and ports gently with a dry cloth or a small brush to remove any dust or debris.
4. Avoid getting moisture into any openings.

Storage:

1. Store the speaker in a cool, dry place away from direct sunlight and heat sources.
2. Ensure the speaker is fully charged before storing for an extended period.
3. If storing for a long time, recharge the speaker every three months to maintain battery health.
4. Keep the speaker and accessories in their original packaging or in a protective case to prevent damage.



FCC INFORMATION

WARNING:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This unit generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Register Product

Thank you for choosing PyleUSA. By registering your product, you ensure that you receive the full benefits of our exclusive warranty and personalized customer support.

Complete the form to access expert support and to keep your PyleUSA purchase in perfect condition.



[PyleUSA.com/register](https://www.PyleUSA.com/register)

PYLE

PyleUSA.com



Questions or Comments?

We are here to help!

Phone: 1.718.535.1800

[PyleUSA.com/ContactUs](https://www.pyleusa.com/ContactUs)