

USER'S Manual

SR-611

CAUTION:

This Walkie-Talkie is the product with excellent design and advanced technology. The following suggestions will help you fulfill your obligations under warranty terms and understand the safety knowledge of using walkie-talkie.

1. Don't try to disassemble the walkie-talkie. Unauthorized disassemble may cause damage to the walkie-talkie.
2. This machine can use universal qualified mobile phone charger(5V).
3. Don't expose the machine to sun for a long time or put it on a overheated place.
4. Don't place it in a dusty or damp place.
5. Don't use strong chemicals, cleaning agents or strong lotions to clean walkie-talkie.
6. If it is found to emit peculiar smell or smoke, place it on the open ground to avoid injury, and contact the distributor in time.
7. Don't use the machine inflammable, explosive or other place where walkie-talkie is prohibited.
8. In order to obtain the best communication performance, it is recommended that least distance between walkie-talkies is 2 meters.
9. Please abide the local wireless management regulations, Contact with the distributor if you have any questions.

Checklist:

Open the package carefully, check the product and accessories according to the following list:

Please conduct your distributor immediately if any damaged or missing happened!

NO.	Item	QTY
1	Walkie-talkie	1
2	Charger	1
3	Charging line	1
4	Earphone	1
5	User manual	1


Function & Description:

Function	Description	Remark
Channel	22 channels	Default:22 channel
CTCSS/DCS	Normal: 38 CTCSS+61CDCSS	Can be adjusted in normal mode only.
Volume	Receiving vlume	1-8
Battery saving	Extending standby time	

LED Description:

LED(ON)	STATUS	Description
Red	Transmitting	Red Led is lighted while transmitting Signals (PTT key is pressed)
Green	Receiving	Green Led is lighted while receiving Signals
Blue	Battery full	Blue led is lighted while charging the battery full
R-G B blinking	Charging	The LED is blinking (R-G-B) while charging
Led Blinking Slowly	Standby mode Indicator	Blinking(Blue): Battery meter (higher than 75%) Blinking(Cyan): Battery meter(50%-75%) Blinking(Yellow): Battery meter (10%-50%) Blinking(Red): Battery Low(less than 10%)

Unit Description:

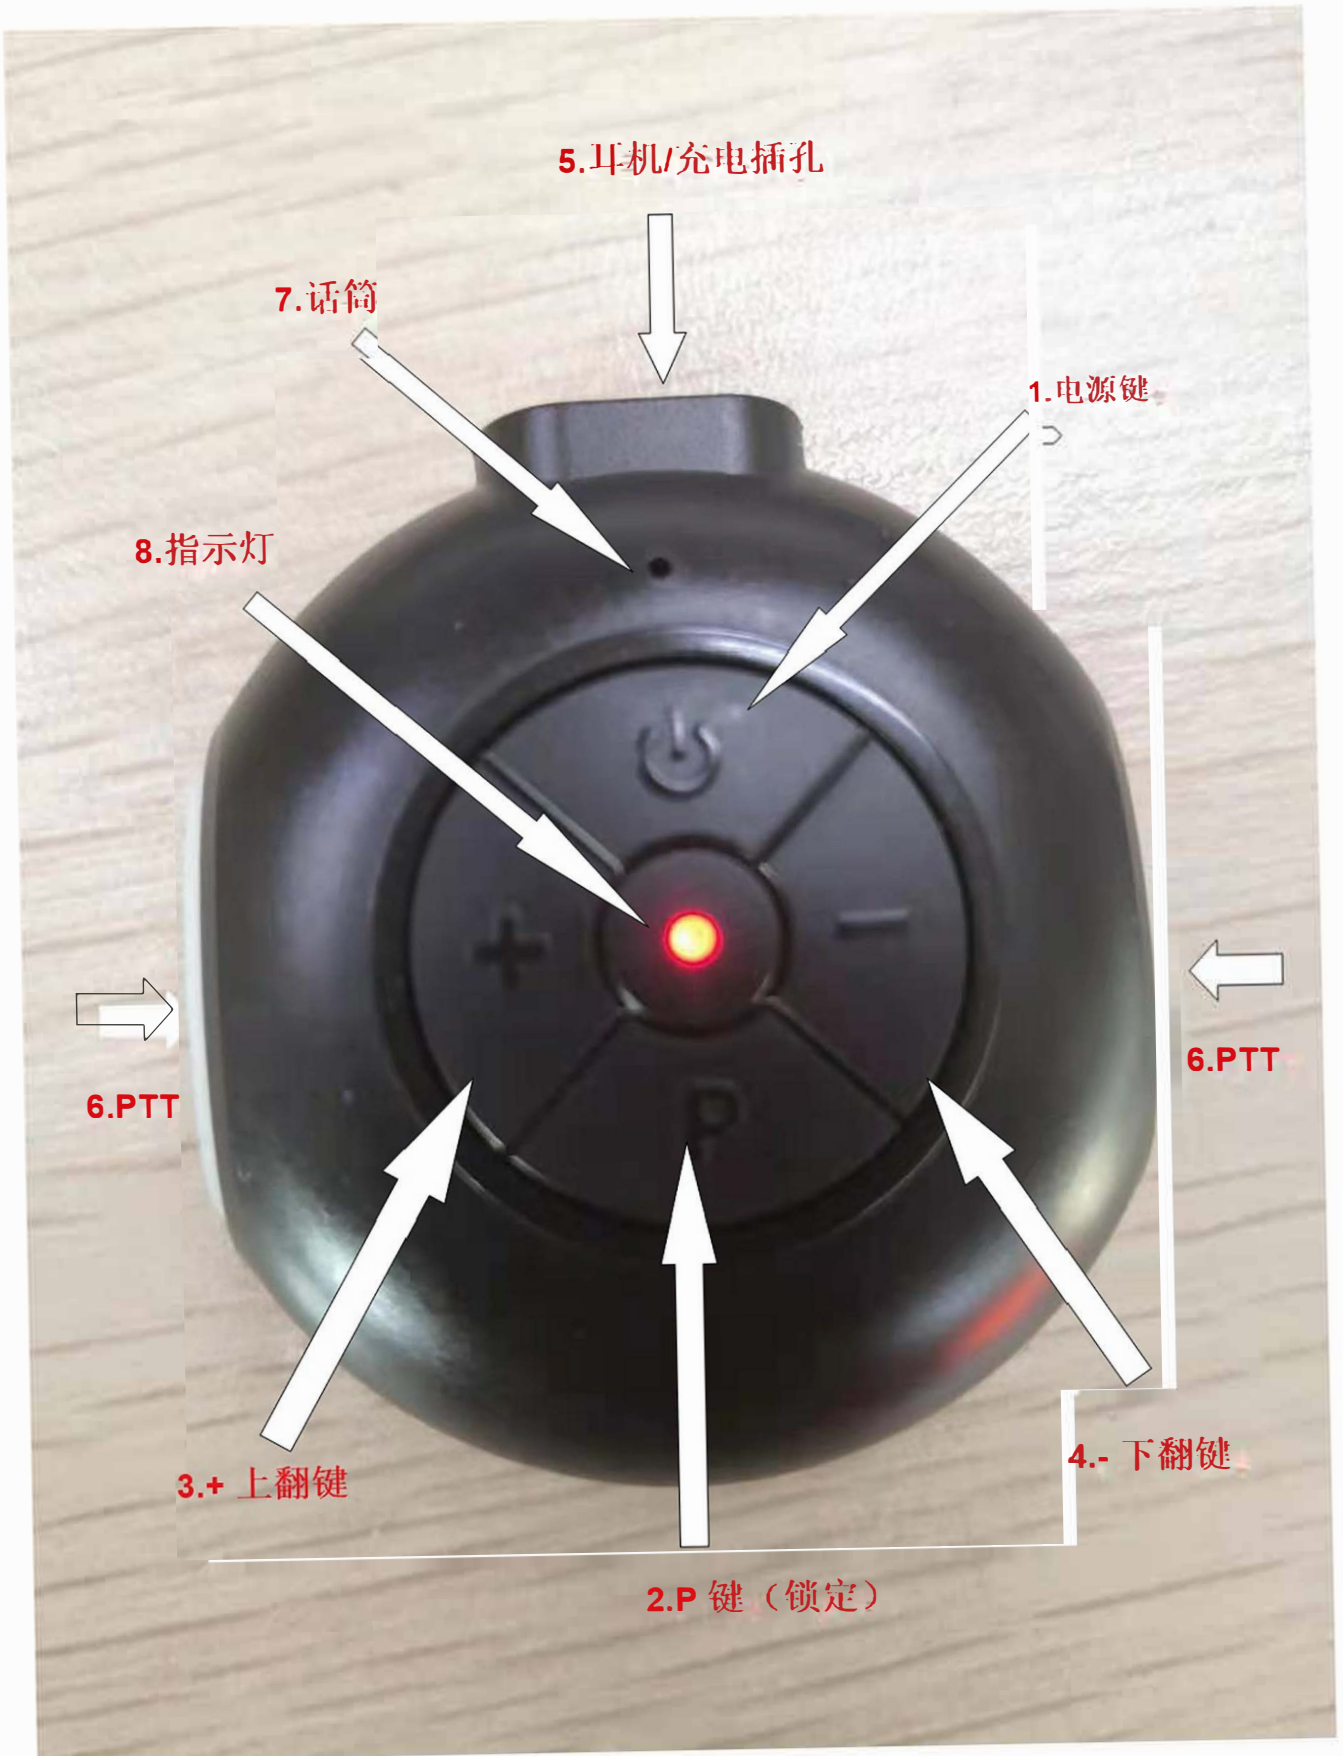

No.	Name	Description
1	Power key	Power ON/OFF: Press Power key continuously for 2 seconds, to turn ON/OFF.
2	P key	Press P key for 2 seconds to Lock/Unlock the key. Press P key shortly: Voice prompt current channel.
3	+ (Up key)	1.Press the key shortly to adjust the channel, Press the key for 2 seconds to adjust the receiving volume.(key unlocked mode). 2.To Increase channel/volume while upper mode.
4	- (Down key)	1.Press the key shortly to adjust the channel, Press the key for 2 seconds to adjust the receiving volume.(key unlocked mode). 2.To Decrease channel/volume while upper mode.
5	TYPE C Socket	Earphone(Antenna)/Charge & Program Interface
6	PTT	Push To Talk key
7	Microphone	Send the Voice
8	LED	Indicate Walkie-Talkie working status

Fast Function Guide:

1、 Power ON/OFF

Power ON: Press the power key for 2 seconds while power off, “Power on” will be heard and the radio will enter the standby mode.

Power OFF: Press the power key for 2 seconds while power on, “Di” will be heard and the radio will power off.

2、 Channel Setting

Press the up/down key shortly to adjust the channel, current channel Voice prompt will be heard, Press “+” or “-“ key to Increase/Decrease Channel.

*Notice: If you want to change the setting, please Unlock the radio firstly.

3、 CTCSS/DCS setting

Default CTCSS is set as 67Hz.

4、 Volume Setting

Press the "+" or "-" key continuously for 2 seconds, a prompt machine volume, such as the current volume

is set to 5, "volume 5" prompt will be heard. The red light will flash twice, press the "+" or "-" key to add and decrease the volume, Press to the PTT button to save Settings and enter standby mode. In the volume setting state, if no key operation is pressed within 5 seconds, you will hear a beep and return to the standby mode.

*Notice: If you want to change the setting, please Unlock the radio firstly.

5、 Key lock setting

Manually locking: In standby mode, Press P keys for 2 seconds and you will hear a key tone of the lock key. At this time, all the keys and functions are locked except the power on/off function and PTT function.

Automatic locking: If there is no key is pressed over 30 seconds, the key will be automatically locked (to prevent Triggng by mistake).

Unlock: When the machine is locked, Press the P key for 2 seconds, and you will hear the unlock prompt key. At this time, the lock key function will be removed.

5、 Channel promote

Press the P key shortly, the current channel number will be heard.

Battery Information:

■ Charge note

Please charge the radio that is new or unused for a long time before use. When the battery power is found to be low, the red light of the radio flashes, and a "Please charge" prompt sound is heard in the headset. The transmission is prohibited, and the battery needs to be charged at this time.

The Red-Green-Blue Led flashes alternately while charging. The Led turn to Blue while the battery is full.

FCC statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1)

this device may not cause harmful interference, and (2) this device must accept any interference received,

including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the

user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio

frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following

measures:

-- Reorient or relocate the receiving antenna.

-- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help.

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or

transmitter.

Hold the transmitter approximately 2 inches (25mm) from your face and speak in a normal voice, with the

antenna pointed up and away.

Specific Absorption Rate (SAR) information:

walkie-talkie meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health. FCC RF Exposure Information and Statement the SAR limit of USA (FCC) is 8.0 W/kg averaged over one gram of tissue. Device types: walkie-talkie has also been tested against this SAR limit.

This device was tested for typical body-worn operations with the back of the walkie-talkie kept 0mm body-worn Side and 25mm Front of face Side. To maintain compliance with FCC RF exposure requirements, use accessories that maintain 0mm body-worn Side and 25mm Front of face Side separation distance between the user's body and the back of the walkie-talkie. The use of

belt clips, holsters and similar accessories should not contain metallic components in its assembly.

The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.

RF Energy Exposure Awareness and Control Information and Operational Instructions for Occupational Use

Notice: this radio is intended for use in occupational/controlled conditions where users have full knowledge

of their exposure and can exercise control over their exposure to meet the occupational limits in FCC and

International standards. This radio device is NOT authorized for general population consumer use. Federal Communication Commission (FCC) Regulations

When Waterproof walkie-talkie is used as a consequence of employment, the FCC requires users to be

fully aware of and able to control their exposure to meet occupational requirement. Exposure awareness can

be facilitated by the use of a product label directing users to specific user awareness information. Your

Waterproof walkie-talkie has a RF Exposure Product Label. Also, your Waterproof walkie-talkie Radio

user manual includes information and operating instructions required to control your RF exposure and

satisfy compliance requirements.

Compliance with RF Exposure Standards

Your Waterproof walkie-talkie is designed and tested to compliance with a number of national and international standards and guidelines for human exposure to radio frequency electromagnetic energy. This

radio complies with the IEEE (FCC) and ICNIRP exposure limits for occupational/controlled RF exposure

environments at operating duty factors of up to 50% talk – 50% listen and is approved for occupational use

only. In terms of measuring RF energy for compliance with these exposure guidelines, your radio generates

measurable RF energy only while it is transmitting (during talking), not when it is receiving (listening) or in

standby mode.

Your Waterproof walkie-talkie complies with the following RF energy exposure standards and guidelines:

- United States Federal Communications Commission (FCC), Code of Federal Regulations;
- Institute of Electrical and Electronic Engineers (IEEE) C95.1
- International Commission on Non-ionizing Radiation Protection (ICNIRP)

RF Exposure Compliance and Control Guidelines and Operating Instructions for Two-Way Radio Operations

To control your exposure and ensure compliance with the occupational/controlled environment exposure

limits, always adhere to the following procedures;

- DO NOT remove the RF Exposure Label from the device

- User awareness instructions should accompany device when transferred to other users.

Operational Instructions and Training Guidelines

To ensure optimal performance and compliance with the occupational/controlled environment RF energy

exposure limits in the above standards and guidelines, users should transmit no more than 50% of the time

and always adhere to the following procedures;

- In front of the face, hold the radio in a vertical position with microphone (and other parts of the radio including the antenna) at least one inch (2.5 centimeters) away from the nose or lips. Keep the

radio at a proper distance is important to ensure compliance.

Note: RF exposure decrease with increasing distance from the antenna.

- Body Worn Operation; when worn the body, always place the radio in an approved clip, holder, or body harness for this product.

Using approved body-worn accessories is important because the use of non-approved accessories may

results in exposure levels, which exceed the occupational/controlled environment RF exposure limits

Using only approved supplied or replacement antennas, batteries, and audio accessories, use of nonapproved antennas, batteries, and wired or wireless accessories may exceed the applicable RF exposure guidelines (IEEE, ICNIRP or FCC).