



DRAPER[®]

230V

WORKLIGHT

WITH WIRELESS SPEAKER

66011/65984



These instructions accompanying the product are the original instructions. This document is part of the product, keep it for the life of the product passing it on to any subsequent holder of the product. Read all these instructions before assembling, operating or maintaining this product.

This manual has been compiled by Draper Tools describing the purpose for which the product has been designed, and contains all the necessary information to ensure its correct and safe use. By following all the general safety instructions contained in this manual, it will ensure both product and operator safety, together with longer life of the product itself.

All photographs and drawings in this manual are supplied by Draper Tools to help illustrate the operation of the product.

Whilst every effort has been made to ensure the accuracy of information contained in this manual, the Draper Tools policy of continuous improvement determines the right to make modifications without prior warning.

1. TITLE PAGE

1.1 INTRODUCTION

User manual for 230V Worklight with wireless Speaker

Stock No: 66011, 65984

Part No's: WL/BTS/1200/Y, WL/BTS/1200/G

1.2 REVISIONS

Date first published March 2017

As our user manuals are continually updated, users should make sure that they use the very latest version.

Downloads are available from: <http://www.drapertools.com/manuals>

Draper Tools Limited

Hursley Road

Chandler's Ford

Eastleigh

Hampshire.

SO53 1YF.

UK.

Website: drapertools.com

Product Helpline: +44 (0) 23 8049 4344

General Fax: +44 (0) 23 8026 0784

1.3 UNDERSTANDING THIS MANUALS SAFETY CONTENT:

WARNING! – Information that draws attention to the risk of injury or death.

CAUTION! – Information that draws attention to the risk of damage to the product or surroundings.

1.4 COPYRIGHT © NOTICE:

Copyright © Draper Tools Limited.

Permission is granted to reproduce this publication for personal and educational use only. Commercial copying, redistribution, hiring or lending is prohibited.

No part of this publication may be stored in a retrieval system or transmitted in any other form or means without written permission from Draper Tools Limited.

In all cases this copyright notice must remain intact.

2. CONTENTS

1. TITLE PAGE	
1.1 INTRODUCTION	1
1.2 REVISION HISTORY	2
1.3 UNDERSTANDING THIS MANUAL	2
1.4 COPYRIGHT NOTICE	2
2. CONTENTS	
2.1 CONTENTS	3
3. GUARANTEE	
3.1 GUARANTEE	4
4. INTRODUCTION	
4.1 SCOPE	5
4.2 SPECIFICATION	5
4.3 HANDLING AND STORAGE	5
5. HEALTH AND SAFETY INFORMATION	
5.1 GENERAL SAFETY INSTRUCTIONS FOR POWER TOOL USE	6
– Electrical safety	6
– Personal safety	6
– Service	6
5.2 ADDITIONAL SAFETY INFORMATION	7
6. IDENTIFICATION	
6.1 TECHNICAL IDENTIFICATION	8
7. UNPACKING AND CHECKING	
7.1 PACKAGING	9
8. OPERATION AND USE	
8.1 POWER SUPPLY	10
8.2 WORKLIGHT OPERATION	10
8.3 SPEAKER OPERATION	11
9. MAINTENANCE	
9.1 MAINTENANCE	12
10. EXPLANATION OF SYMBOLS	
10.1 EXPLANATION OF SYMBOLS	13
12. DISPOSAL	
12.1 DISPOSAL	14
DECLARATION OF CONFORMITY	ENCLOSED

2. GUARANTEE

3.1 GUARANTEE

Draper tools have been carefully tested and inspected before shipment and are guaranteed to be free from defective materials and workmanship.

Should the tool develop a fault, please return the complete tool to your nearest distributor or contact:

Draper Tools Limited, Chandler's Ford, Eastleigh, Hampshire, SO53 1YF. England.

Telephone Sales Desk: (023) 8049 4333 or:

Product Helpline (023) 8049 4344.

A proof of purchase must be provided with the tool.

If upon inspection it is found that the fault occurring is due to defective materials or workmanship, repairs will be carried out free of charge. This guarantee period covering parts/labour is 12 months from the date of purchase except where tools are hired out when the guarantee period is 90 days from the date of purchase. The guarantee is extended to 24 months for parts only. This guarantee does not apply to normal wear and tear, nor does it cover any damage caused by misuse, careless or unsafe handling, alterations, accidents, or repairs attempted or made by any personnel other than the authorised Draper warranty repair agent.

Note: If the tool is found not to be within the terms of warranty, repairs and carriage charges will be quoted and made accordingly.

This guarantee applies in lieu of any other guarantee expressed or implied and variations of its terms are not authorised.

Your Draper guarantee is not effective unless you can produce upon request a dated receipt or invoice to verify your proof of purchase within the guarantee period.

Please note that this guarantee is an additional benefit and does not affect your statutory rights.

Draper Tools Limited.

4. INTRODUCTION

4.1 SCOPE

230V worklight with plastic bodied housing, toughened glass lens and a 20 x SMD (Surface Mounted Diode) LED plate, delivering a 120° beam of light and higher lumen output than standard LED's. The worklight also features a built in wireless enabled speaker, allowing for audio output via other Bluetooth® compatible devices.

4.2 SPECIFICATION

Stock No's	65984, 66011
Part No's	WL/BTS/1200/G, WL/BTS/1200/Y
Lightsource	20 x 20W SMD LED plate
Lumens:.....	1200
Ingress protection	IP44
Sound power level.....	85dB(A)
Single value noise level (LWA)†	85dB(A)
Construction	Class II
Dimensions:.....	220 x 328 x 225mm
Weight (worklight only):	1.696kg

†A-weighted sound pressure level in accordance to 2000/14/EC.

4.3 HANDLING AND STORAGE

Store in a dry location out of the reach of children.

5. HEALTH AND SAFETY INFORMATION

5.1 GENERAL SAFETY INSTRUCTIONS FOR POWER TOOL USE

Warning: Read all safety warnings and all instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference.

The term “power tool” in the warnings refers to your mains operated (corded) power tool or battery-operated (cordless) power tool.

Electrical safety

- a) Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools. Unmodified plugs and matching outlets will reduce risk of electric shock.
- b) Avoid body contact with earthed or grounded surfaces such as pipes, radiators, ranges and refrigerators. There is an increased risk of electric shock if your body is earthed or grounded.
- c) Do not expose power tools to rain or wet conditions. Water entering a power tool will increase the risk of electric shock.
- d) Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts. Damaged or entangled cords increase the risk of electric shock.
- e) When operating a power tool outdoors, use an extension cord suitable for outdoor use. Use of a cord suitable for outdoor use reduces the risk of electric shock.
- f) If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) protected supply. Use of an RCD reduces the risk of electric shock.

Personal safety

- a) Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating power tools may result in serious personal injury.
- b) Use personal protective equipment. Always wear eye protection. Protective equipment such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries.
- c) Prevent unintentional starting. Ensure the switch is in the off position before connecting to power source and/or battery pack, picking up or carrying the tool. Carrying power tools with your finger on the switch or energising power tools that have the switch on invites accidents.
- d) Remove any adjusting key or wrench before turning the power tool on. A wrench or a key left attached to a rotating part of the power tool may result in personal injury.

Service

- a) Have your power tool serviced by a qualified repair person using only identical replacement parts. This will ensure that the safety of the power tool is maintained.

5. HEALTH AND SAFETY INFORMATION

5.2 ADDITIONAL SAFETY INFORMATION

- Do not point (shine) the light into any persons or animals eyes.
- Do not use near children.
- Store out of the reach of children.
- Do not put this unit into a fire or use near any flammable object.
- Do not use in explosive atmospheres or environments.
- Do not use excessive force on this product as it can permanently damage the worklight.
- Only use the charger in a standard environment.
- Do not use the charger to charge any other product and only use the supplied charger to charge this worklight.

6. IDENTIFICATION

6.1 TECHNICAL IDENTIFICATION



- ① Handle grip.
- ② SMD LED Plate.
- ③ OFF/ON/Speaker switch.
- ④ Worklight body.
- ⑤ Glass lens.
- ⑥ Tubular frame.
- ⑦ Fixing bracket and fittings.
- ⑧ Angle adjustment knob.
- ⑨ Speaker.

7. UNPACKING AND CHECKING

7.1 PACKAGING

Carefully remove the worklight from the packaging and examine it for any sign of damage that may have happened during shipping. Lay the contents out and check them against the parts shown below. If any part is damaged or missing; please contact the Draper Helpline (the telephone number appears on the Title page) and do not attempt to use the worklight.

The packaging material should be retained at least during the guarantee period: in case the worklight needs to be returned for repair.

Warning! Some of the packaging materials used may be harmful to children. Do not leave any of these materials in the reach of children.

If any of the packaging is to be thrown away, make sure they are disposed of correctly; according to local regulations.

8. OPERATION AND USE

8.1 POWER SUPPLY – FIG. 1

Before you connect the equipment to the power supply make sure that the data on the rating plate is identical to the supply voltage.

Warning! Always pull out the power plug before making adjustments to the equipment.

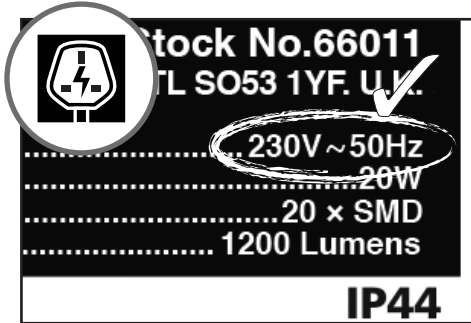





FIG.1



8.2 WORKLIGHT OPERATION – FIG. 2

The worklight is operated via the OFF/ON/Speaker switch (3).

-  Press for worklight only.
-  Press for worklight and speaker.
-  Press the rocker switch to the middle position to switch the worklight off.

Warning! The worklight produces a high intensity light. Do not point the worklight at the eyes or aim at objects that are very close.

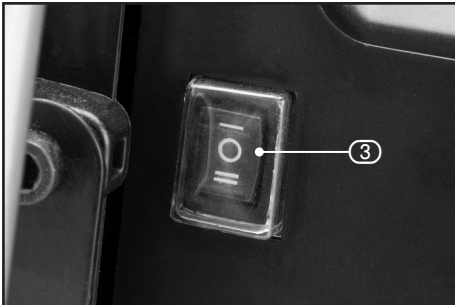


FIG.2

8. OPERATION AND USE

8.3 SPEAKER OPERATION – FIG. 3

Pairing your device

To operate the worklight speaker in conjunction with a Bluetooth® enabled device, it will need to first be 'paired' using the device's Bluetooth® connectivity settings.

 Press the OFF/ON/Speaker switch (3) to worklight and speaker mode.

- Use the settings on your Bluetooth® enabled device to 'discover' the worklight speaker (for further information, consult the user guide documentation supplied with your device).
- The worklight speaker's active name; should appear in the device's list.
- Select the above name to pair the worklight and device.
- The worklight speaker is now ready for playback of audio files.

Once an established pairing connection has been made with the worklight speaker, it should not be necessary to repeat the connection set up on further occasions.



FIG.3

* The Bluetooth® word is a registered trademark owned by the Bluetooth SIG Inc,

9. MAINTENANCE

9.1 MAINTENANCE – FIG. 4

Use only mild soap and a damp cloth to clean this worklight. Do not submerge into liquid.

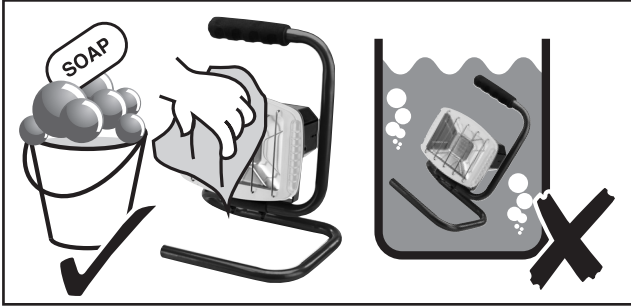


FIG.4

10. EXPLANATION OF SYMBOLS



Class II construction (Double insulated).



WEEE
Do not dispose of Waste Electrical & Electronic Equipment in with domestic rubbish.



Warning! Read the instruction manual.



Warning! Do not aim beam at bystanders or look directly into light source.



Single value noise marking.
(Maximum declared A-Weighted sound power level in decibels).

11. DISPOSAL

11.1 DISPOSAL

At the end of the machine's working life, or when it can no longer be repaired, ensure that it is disposed of according to national regulations.

Contact your local authority for details of collection schemes in your area.

In all circumstances:

- Do not dispose of power tools with domestic waste.
- Do not incinerate.
- Do not abandon in the environment.
- Do not dispose of WEEE* as unsorted municipal waste.



12. NOTES

CONTACT US

Draper Tools Limited, Hursley Road,
Chandler's Ford, Eastleigh, Hampshire. SO53 1YF. U.K.

Helpline: (023) 8049 4344

Sales Desk: (023) 8049 4333

Internet: www.drapertools.com

E-mail: sales@drapertools.com

General Enquiries: (023) 8026 6355

Service/Warranty Repair Agent:

For aftersales servicing or warranty repairs, please contact the
Draper Tools Helpline for details of an agent in your local area.

YOUR DRAPER STOCKIST

RDCH0417

©Published by Draper Tools Limited.

No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical photocopying, recording or otherwise without prior permission in writing from Draper Tools Ltd.