




QUICK START GUIDE

ENGLISH


CHARGING CASE FOR NAUTITALK BOSUN




Product Details

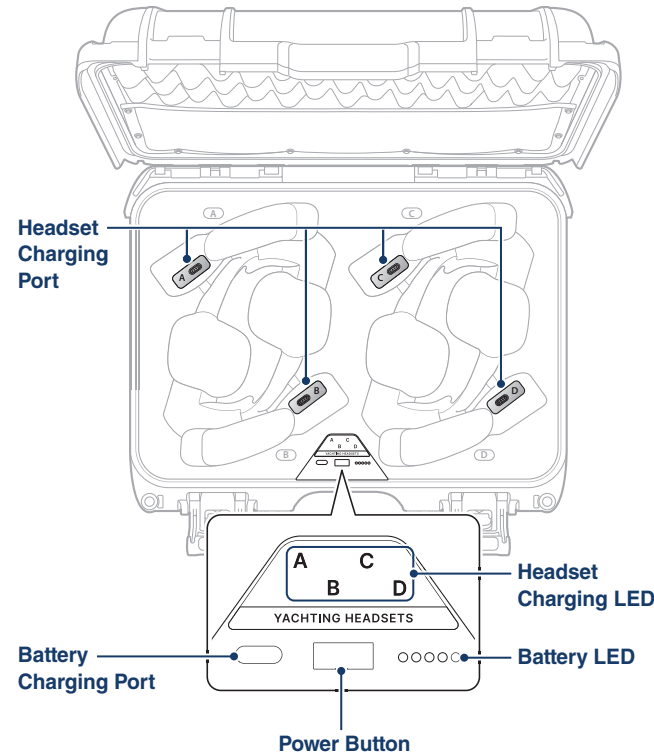

Package Contents

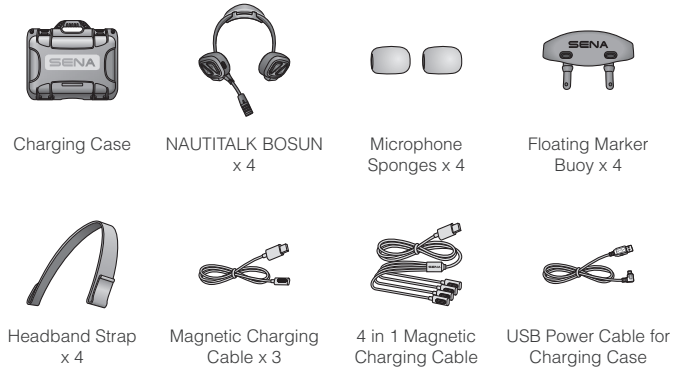

Battery Level




The battery LED shows the battery level of the charging case.
If the battery LED is off, tap the power button to check the battery level.





Charging the Charging Case

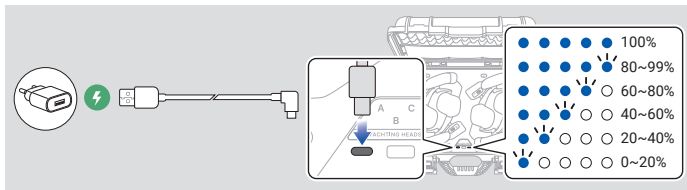


It takes 10 hours to fully charge.

Any 3rd party USB charger (5V/3A) can be used with the charging case if it is approved by the FCC, CE, IC, or other locally approved agencies.

Using a non-approved charger may cause fire, explosion, leakage, and other hazards, which may also reduce the lifetime or performance of the battery.

Charging the Headset

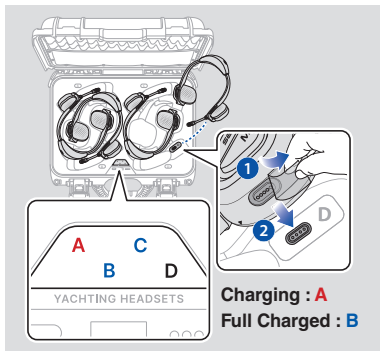


1. Please remove the plastic tape from the charging port of the headset before charging.
2. Place the headset in any empty headset charging port and make sure that the corresponding headset charging LED is illuminated red or blue.

It takes 2.5 hours to fully charge.

Sleep Mode

If all headsets are fully charged or there is no headset in headset charging port, the charging case will switch to sleep mode after approximately 40 seconds, and all LEDs will turn off.

Troubleshooting

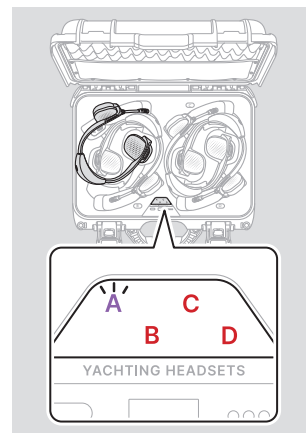

Fault Reset

If the charging case is not working properly, press the power button and then a fault reset will be performed.

Short Circuit Detection

If a short circuit is detected between the headset and the charging port, the headset charging LED will blink purple with a buzzing sound. Remove the headset from the charging case, clean the magnetic ports and replace the headset in the charging case.

Specifications

Capacity	20000 mAh / 74 Wh
Input	5 V / 3 A
Output	Total: 15 W (Max)
Dimension	391 mm x 310 mm x 173 mm (15.4" x 12.2" x 6.8")
Weight	2900 g (102.29 oz)
IP Rating	IP67 Waterproof
Operating Temperature	0 °C – 45 °C (32 °F – 113 °F)

The charging case is IP67-rated waterproof when the case is closed. Ensure that no water enters the case. If it becomes wet, wipe it dry with a clean, and soft cloth. If the charging terminals get wet, the product may not charge properly or could be damaged.

