


ROOM 1 Portable Wireless Speaker

USER MANUAL

V1.0 2025.11.20


Button Instructions

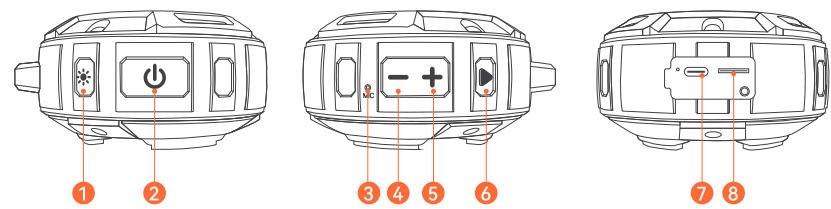

1	Light Show Button	6	Volume Up/Next Track
2	Power Button	7	Play / Pause Button
3	Mic Port	8	USB-C Charging Port
4	Volume Down/Previous Track		TF Card Slot


Installing Buckle

The lightweight aluminum alloy clips let you mount the speaker anywhere.

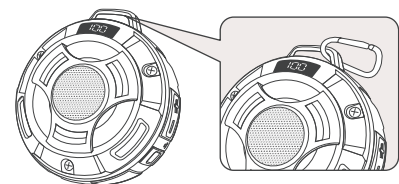

Main Product Functions


No.	Function	Describe
1	Mono / Stereo L/R	Mono
2	BT Mode	Connect via Bluetooth to play music.
3	TF Mode	Play music from TF flash drives (supports up to 32GB capacity and MP3/WAV formats)
4	LED Power Display	Shows speaker status.
5	USB-C Charging	USB-C Charging
6	RGB Ambient Lights	Default RGB mode: Mode 1 (5 modes to choose from).
7	TWS Mode	When connected via Bluetooth, the two units can pair in TWS mode to create an enhanced stereo system
8	Disconnects due to out-of-range	Auto-reconnection within 10 minutes after disconnection
9	Automatic Sleep Mode	Automatically powers off after 10 minutes without connection. Remains active when connected
10	Charging	The red indicator light is on
11	Charging Complete	The charging light turns off



Charging Your Speaker

Use the provided USB-C /USB-A to USB-C cable to connect the speaker and a certified charger to a power source.

	Steady Red	Charging
	Red Light Turns Off	Charging Complete



Please use a charger with a power output of 1W to 5W to charge the speaker.

Powering On / Off

	Power On/Power Off		2s	Press and Hold for 2 Seconds
	Mode Switches (BT/TF Card)		1x	Press Once
	Restart		10s	Press and Hold for 10 Seconds
	Restore Factory Settings		5x	Press Five Times
	TWS Pairing/Disconnect		2x	Press Twice

This speaker will power off automatically after 10 minutes if no device is connected.

Using Your Speaker

Bluetooth Mode (Press power once switch modes.)

Turn on the speaker first, then enable Bluetooth on your phone. Select 'ROOM 1' to pair. When not paired, the blue LED will flash. Upon successful pairing, you'll hear a confirmation tone and the light will remain steady.

To pair a new device with the speaker, disconnect the previously connected phone first. When powered on, the speaker automatically reconnects to the last used device. If the phone's Bluetooth is off or the connection fails, the speaker will enter pairing mode. Simply pair it with the new device directly.


Press Once the power button to switch between operation modes (Bluetooth/TF Card modes). You can toggle them based on your current needs.



True Wireless Stereo (TWS) Mode


Two identical BassBloom speakers can pair with each other for stereo sound. Both speakers can play the same audio (one as the left channel and the other as the right channel).

With one speaker connected to a smartphone, After powering on, double-tap the power button to enable/disable TWS pairing.

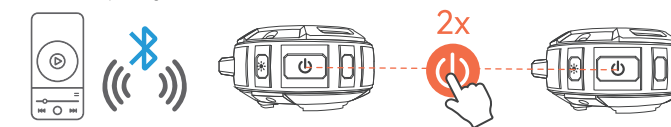

Light Show


The front of the speaker features 5 dynamic light effects that move with the music's rhythm, while the ambient lighting stays constant to enhance the atmosphere. You can switch between different lighting effects to match your mood or preference.



LED Power Display


The speaker features an LED battery percentage display for precise power monitoring. No more guessing—check remaining battery life anytime, anywhere.

(Note: The real-time battery level can only be viewed when music is paused or during charging. At all other times, the LED screen will display the music playback time.)



Switch Songs

Press and hold the - button for 2 seconds to replay the previous track. Press the + button for the next track. Press once to decrease/increase volume.



Button Controls

	Press and Hold for 2 Seconds	Power On/Power Off
	Press Once	Mode Switches (BT/TF Card)
	Press and Hold for 10 Seconds	Restart
	Press Five Times	Restore Factory Settings
	Press Twice	TWS Pairing/Disconnect
	Press Once	Pause/play/answer/hang up
	Press and Hold for 2 Seconds	Bluetooth Disconnection/Reconnection (rejecting incoming calls)
	Press Once	Volume up
	Press and Hold for 2 Seconds	Next Track
	Press Once	Volume Down
	Press and Hold for 2 Seconds	Previous Track
	Press Once	Light Effect Switching
	Press and Hold for 2 Seconds	Lights off/on

Specifications

Model	ROOM 1
Product Name	Wireless Bluetooth Speaker
Power Input	5V --- 1A
Battery Capacity	3.7V 1800mAh, 6.66Wh
Audio Output Power	12W
Playtime (varies by volume level and music content)	15 Hours
Charging Time	About 2H
Waterproof and Dustproof Rating	IPX7
Speaker Driver	Φ52mm/4Ω Speaker
Link Range	>10M
Frequency Response	50 HZ-20 kHz
Cable Length	30cm
FCC ID	2BRLM-ROAR 1

Note:

Friendly reminder: If the speaker is not used for a long time, it is necessary to keep some battery power stored. It is essential to fully charge it once a month.

This is to protect the battery life of your speaker, which may vary depending on usage patterns and environmental conditions.

Furthermore, do not expose the BassBloom-ROOM 1 to liquids without disconnecting the cable. Avoid submerging the BassBloom-ROOM 1 in water while charging, as this may cause permanent damage to the speaker or power source.

Chemicals, salt, or foreign substances in pools or the ocean, if not promptly cleaned after use, can damage the waterproof seals or harm the connector surfaces in the long run. After any liquid spillage or rinsing, refrain from charging the speaker until it is completely dry and clean.

Charging while damp may result in speaker damage. (It is advisable to avoid direct water rinsing and instead use a tissue or damp cloth for cleaning.)

When using an external adapter, ensure that the output voltage/current of the adapter does not exceed 5V/1A. This will help maintain the proper functioning of your BassBloom-ROOM 1 speaker.

Battery Warning

Using the wrong battery can cause fire and other hazards (for example, in the case of some lithium battery types)

1. Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
2. Do not leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.
3. A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

FCC Caution

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules.Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received,including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on,the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

ISED Warning

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device is compliance with RF exposure guidelines, users can obtain Canadian information on RF exposure and compliance.

Le présent appareil est conforme

Après examen de ce matériel aux conformités ou aux limites d'intensité de champ RF, les utilisateurs peuvent sur l'exposition aux radiofréquences et la conformité and compliance d'acquérir les informations correspondantes.

Caution

DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS

The symbol indicates DC voltage

RECYCLING

This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment. User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.

This product can be used across EU member states.

The device is low power device, it can meet the requirement of the RF exposure.

Hearing Safety:

1. High Sound Pressure
2. Hearing Damage Risk
3. Do not listen at high volume levels for long periods.

CE
Made in China


ROOM-1说明书

单页尺寸: 120x100mm

材质: 108g双铜纸, 不覆膜

装订方式: 风琴折





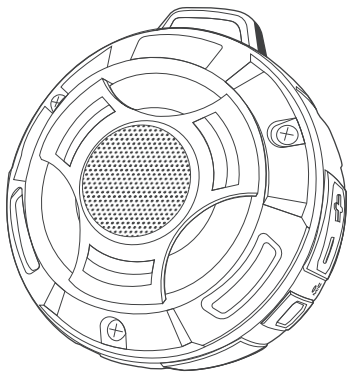


ROOM 1 Portable Wireless Speaker

USER MANUAL

V1.0 2025.11.20


Button Instructions



1	 Light Show Button	5	 Volume Up/Next Track
2	 Power Button	6	 Play / Pause Button
3	 Mic Port	7	 USB-C Charging Port
4	 Volume Down/Previous Track	8	 TF Card Slot


Installing Buckle

The lightweight aluminum alloy clips let you mount the speaker anywhere.

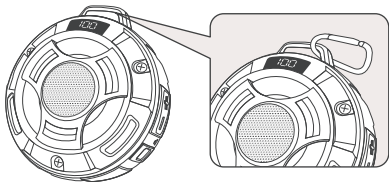



Main Product Functions


No.	Function	Describe
1	Mono / Stereo L/R	Mono
2	BT Mode	Connect via Bluetooth to play music.
3	TF Mode	Play music from TF flash drives (supports up to 32GB capacity and MP3/WAV formats)
4	LED Power Display	Shows speaker status.
5	USB-C Charging	USB-C Charging
6	RGB Ambient Lights	Default RGB mode: Mode 1 (5 modes to choose from).
7	TWS Mode	When connected via Bluetooth, the two units can pair in TWS mode to create an enhanced stereo system
8	Disconnects due to out-of-range	Auto-reconnection within 10 minutes after disconnection
9	Automatic Sleep Mode	Automatically powers off after 10 minutes without connection. Remains active when connected
10	Charging	The red indicator light is on
11	Charging Complete	The charging light turns off



Charging Your Speaker







Use the provided USB-C /USB-A to USB-C cable to connect the speaker and a certified charger to a power source.

	Steady Red	Charging
	Red Light Turns Off	Charging Complete



Please use a charger with a power output of 1W to 5W to charge the speaker.

Powering On / Off

	Power On/Power Off	 2s	Press and Hold for 2 Seconds
	Mode Switches (BT/TF Card)	 1x	Press Once
	Restart	 10s	Press and Hold for 10 Seconds
	Restore Factory Settings	 5x	Press Five Times
	TWS Pairing/Disconnect	 2x	Press Twice

This speaker will power off automatically after 10 minutes if no device is connected.

Using Your Speaker

Bluetooth Mode (Press power once switch modes.)

Turn on the speaker first, then enable Bluetooth on your phone. Select 'ROOM 1' to pair. When not paired, the blue LED will flash. Upon successful pairing, you'll hear a confirmation tone and the light will remain steady.

To pair a new device with the speaker, disconnect the previously connected phone first. When powered on, the speaker automatically reconnects to the last used device. If the phone's Bluetooth is off or the connection fails, the speaker will enter pairing mode. Simply pair it with the new device directly.


Press Once the power button to switch between operation modes (Bluetooth/TF Card modes). You can toggle them based on your current needs.



True Wireless Stereo (TWS) Mode


Two identical BassBloom speakers can pair with each other for stereo sound. Both speakers can play the same audio (one as the left channel and the other as the right channel).

With one speaker connected to a smartphone, After powering on, double-tap the power button to enable/disable TWS pairing.

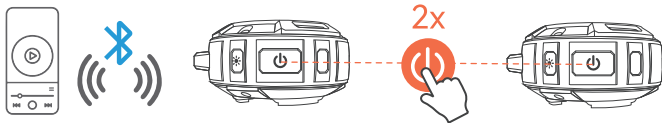

Light Show


The front of the speaker features 5 dynamic light effects that move with the music's rhythm, while the ambient lighting stays constant to enhance the atmosphere. You can switch between different lighting effects to match your mood or preference.



LED Power Display


The speaker features an LED battery percentage display for precise power monitoring. No more guessing—check remaining battery life anytime, anywhere.

(Note: The real-time battery level can only be viewed when music is paused or during charging. At all other times, the LED screen will display the music playback time.)








Switch Songs


Press and hold the - button for 2 seconds to replay the previous track. Press the + button for the next track. Press once to decrease/increase volume.



Button Controls

	Press and Hold for 2 Seconds	Power On/Power Off
	Press Once	Mode Switches (BT/TF Card)
	Press and Hold for 10 Seconds	Restart
	Press Five Times	Restore Factory Settings
	Press Twice	TWS Pairing/Disconnect
	Press Once	Pause/play/answer/hang up
	Press and Hold for 2 Seconds	Bluetooth Disconnection/Reconnection (rejecting incoming calls)
	Press Once	Volume up
	Press and Hold for 2 Seconds	Next Track
	Press Once	Volume Down
	Press and Hold for 2 Seconds	Previous Track
	Press Once	Light Effect Switching
	Press and Hold for 2 Seconds	Lights off/on

Specifications

Model	ROOM 1
Product Name	Wireless Bluetooth Speaker
Power Input	5V  1A
Battery Capacity	3.7V 1800mAh, 6.66Wh
Audio Output Power	12W
Playtime (varies by volume level and music content)	15 Hours
Charging Time	About 2H
Waterproof and Dustproof Rating	IPX7
Speaker Driver	Φ52mm/4Ω Speaker
Link Range	>10M
Frequency Response	50 HZ~20 kHz
Cable Length	30cm
FCC ID	2BRLM-ROAR 1

Note:

Friendly reminder: If the speaker is not used for a long time, it is necessary to keep some battery power stored. It is essential to fully charge it once a month.

This is to protect the battery life of your speaker, which may vary depending on usage patterns and environmental conditions.

Furthermore, do not expose the BassBloom–ROOM 1 to liquids without disconnecting the cable. Avoid submerging the BassBloom–ROOM 1 in water while charging, as this may cause permanent damage to the speaker or power source.

Chemicals, salt, or foreign substances in pools or the ocean, if not promptly cleaned after use, can damage the waterproof seals or harm the connector surfaces in the long run. After any liquid spillage or rinsing, refrain from charging the speaker until it is completely dry and clean.

Charging while damp may result in speaker damage. (It is advisable to avoid direct water rinsing and instead use a tissue or damp cloth for cleaning.)

When using an external adapter, ensure that the output voltage/current of the adapter does not exceed 5V/1A. This will help maintain the proper functioning of your BassBloom–ROOM 1 speaker.

Battery Warning

Using the wrong battery can cause fire and other hazards (for example, in the case of some lithium battery types)

1. Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
2. Do not leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.
3. A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

FCC Caution

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules.Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received,including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on,the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

ISED Warning

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device is compliance with RF exposure guidelines, users can obtain Canadian information on RF exposure and compliance.

Le présent appareil est conforme

Après examen de ce matériel aux conformité ou aux limites d'intensité de champ RF, les utilisateurs peuvent sur l'exposition aux radiofréquences et la conformité and compliance d'acquérir les informations correspondantes.

Caution

DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS

 The symbol indicates DC voltage

 RECYCLING

This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment. User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.

This product can be used across EU member states.

The device is low power device, it can meet the requirement of the RF exposure.

 Hearing Safety:

1. High Sound Pressure
2. Hearing Damage Risk
3. Do not listen at high volume levels for long periods.



Made in China