



十度音响

扩音器

使用说明书
USER MANUAL



关注十度微信公众号
回复型号获取设备
使用教程

Please read the instructions carefully before using it.

Note:

Before turn on the amplifier, ensure that the MIC don't point at the amplifier, this will eliminate any annoyance associated with howling. For ensure better amplification, aim at the headset MIC capsule when speaking, and keep the distance between the voice amplifier and the MIC more than 60 cm to avoid howling.

Simply tucking the speaker around waist, and mounting headphone over head can help achieve the required distance.


Main features:

- 1.SHIDU patented appearance;
- 2.Stylish, ergonomic and comfortable design;
- 3.10W power output, sound coverage up to 300 m² ;
- 4.Support Bluetooth function;
- 5.Support TF card & USB flash drive music play;
- 6.UHF wireless microphone, long wireless distance and clear sound.

Technical Parameters:

Power output:	10W	Frequency response:	80Hz-18KHz
Output Impedance:	4Ω	Working temperature:	-10°C-45°C
Recharging voltage:	DC 5V 1.5A	Amplification-use time:	6-10 hours
Music-use time:	6-10 hours	Charging time:	3-5 hours

Structure Instruction:

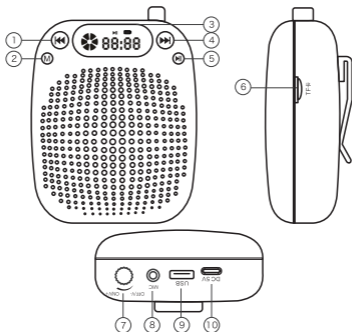

1.Previous: Short press to play previous song, long press to songs fast rewind.

2.Mode: A) Short press to switch to TF card play / USB flash drive play / Bluetooth mode / UHF mode.

B) In UHF mode, long press to enter into UHF pairing status.

C).In music playing mode, long press for single repeat, LCD shows "ONE". Long press again for all repeat, LCD shows "ALL".

3.Digital display

4.Next: Short press to play next song; long press to fast forward.

5.Play/Pause: Short press it to pause or play the song.

6.TF card slot: Insert the TF card to play mp3. It is compatible with most brands, the maximum capacity is 32GB.

Note: It may be unreadable when the file is large or complex.

7.Power switch / volume control

8.Ø3.5mm Microphone Jack: Insert the wired microphone in any mode to amplify with current mode simultaneously. To avoid howling please do not point the microphone toward the speaker. (Wired microphones are not included.)

9.USB flash drive slot: Insert the USB flash drive to play mp3. It is compatible with most brands, the max capacity is 32GB.

10.Type-C Port (DC 5V): Use the charger with DC 5V output connect with Type-C cable to charge the PA system.

Unplug the charger as soon as it is fully charged.

TF/USB flash drive:


Insert the TF card/USB flash drive as showed on the device correctly, then press "M" key to switch to the audio (MP3) mode, and you can play the audio files in the TF card/USB flash drive.

Note: Long press " M " key when playing music, then the LCD screen display "ONE", which means single loop. Long press " M " key again, then the LCD screen display "ALL", which means to play all. (In USB/TF card mode only)

How to charge the amplifier:

When battery symbol on the screen flashes means low power. Please charge through Type-C cable with DC 5V output adaptor. The battery symbol will flash when charge, and when battery symbol stop flash means fully charged. Please remember to unplug after it is fully charged.


Note: We suggest fully recharge the amplifier before you using it at the first time.

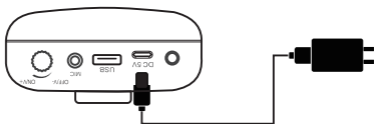

Bluetooth Instruction:

Please pair with your Bluetooth device as follows:


Step 1: Turn on the amplifier and press “M”key to switch to Bluetooth mode. A voice will prompt “Bluetooth is waiting for connection” and the “bLUE”display on the screen will flash.

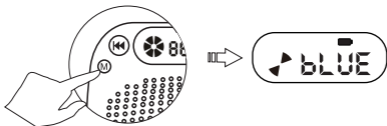

Step 2: From your mobile setting, turn on the Bluetooth function. Then search for “S611” and connect. Bluetooth pairing is complete with a voice prompt “Bluetooth is connected”.

When playing music, please keep the amplifier close to the Bluetooth-enable device to maintain a stable connection.


UHF Wireless microphone:

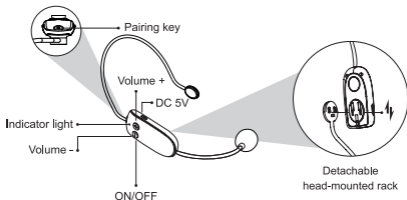

The wireless microphone factory setting have been paired successfully, you can use it directly. If the microphone has no sound or the microphone is disconnected, you need to manually pair it.

Pair the UHF manually:

Step1: Turn on the amplifier and switch to UHF mode, long press the “M” key, the “UHF” icon will flash and a voice prompt will say, “UHF is waiting for connection”.

Step2: Turn on the wireless microphone and long press “” key for 5 seconds. The “UHF” icon will stop flashing, and a voice prompt will say, “UHF is connected”.

Volume Control :

1.If amplifier howling or in a small volume, adjust the volume by press “+” or “-” on the wireless microphone.

2.You can also adjust the volume on the voice amplifier by rotate the volume control.

How to charge the wireless microphone:

When the microphone blue indicator light flashes means low battery. Please turn it off and charging through Type-C with DC 5V 500mA+ adapter. The red indicator light will be on all the time when charging, and it will go out after fully charged.

Notes:

- 1.The normal charge time is 3~5 hours. Unplug the charger as soon as it is fully charged.
 - 2.Full charge before first use of the microphone to ensure best results.
 3. Turn off the UHF wireless microphone when not in use.
-

Trouble shooting:

1. Turn on the power switch, but the amplifier has no sound.

A. The LCD is not light: it means no power and you should charge the amplifier.

B. Turn the volume up on the voice amplifier, and also on the microphone.

2. Talk to the wireless microphone, but the amplifier has no sound.

A. Please confirm both voice amplifier and microphone is power on.

B. Please confirm whether the wireless microphone has been paired with the amplifier successfully or not.

Pair the UHF manually again if necessary.

3. The voice amplifier has distinct howling.

A. Wear the microphones correctly: put the microphone in front of the mouth.

B. In a small room, please turn down the volume properly to avoid howling.

SHIDU After sales service:

If you have any questions, please feel free to contact us, we will try our best to provide best service.

www.10shidu.com Email: service@10shidu.com
