




Meaningful Innovation

INSTRUCTION MANUAL


LED LINEAR HIGHBAY



6 YEAR
WARRANTY*



IP65
RATING



TECHNICAL DATA

MODEL	VT-9-157
SKU	242816
INPUT VOLTAGE	AC 220-240V,50/60Hz
POWER	150/200/240W (Selectable)
COLOR TEMPERATURE	3000K/4000K/6500K(Selectable)
USEFUL LUMEN	32000Lm(@WIDE CONE)
BEAM ANGLE	90°


CRI	≥80
DF	0.9
LIFE SPAN	50,000H
MATERIAL	PC+AL
RATING	IK06
DIMENSION	1060x65x101mm

INTRODUCTION AND WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 6 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.


WARNING

- Please make sure to turn off the power before starting the installation.
- Installation must be performed by a qualified electrician.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Proper grounding should be ensured throughout the installation.
- To be connected with waterproof cable hose.
- Replace any cracked protective shield. 
- Minimum distance from lighted objects 1m. 
- Terminal block not included.



MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code
to access the manual in
multiple languages.




Caution, risk of electric shock.







This marking indicates that this
product should not be disposed
of with other household wastes.

IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU FOR
MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS. V-TAC
EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B

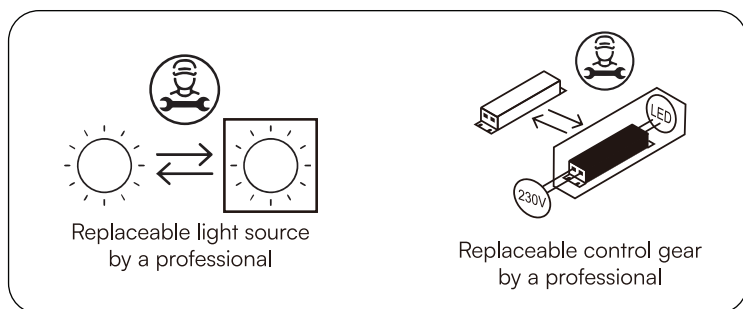

INSTALLATION DIAGRAM

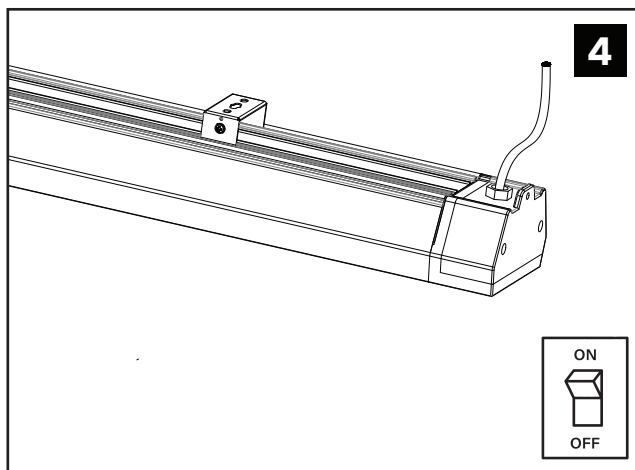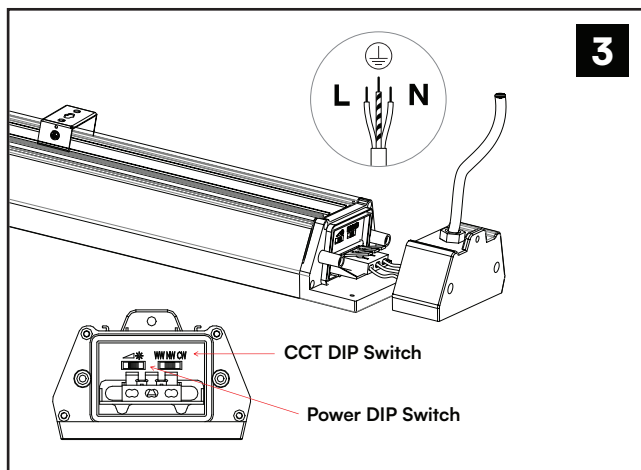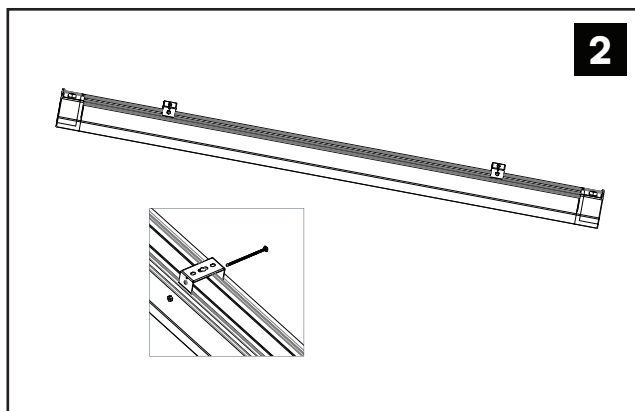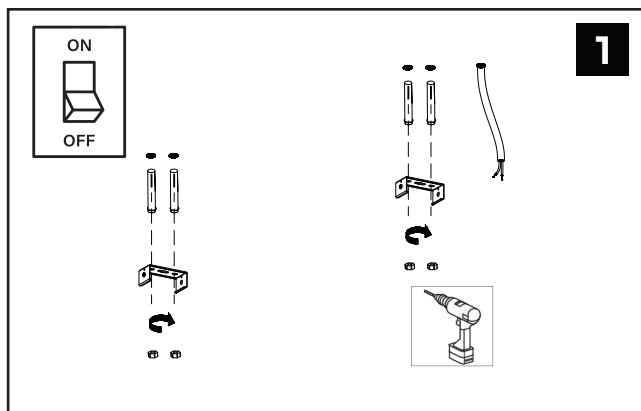











INSTALLATION INSTRUCTION




Please follow all installation instructions carefully. Avoid applying excessive force to the power cable during installation. The supply connection and any external wiring must use conductors with a minimum size of $3 \times 1.0 \text{ mm}^2$.

- Turn off the power before starting the installation
- Remove the two stainless steel brackets from the accessory pack and securely fasten them to the ceiling using the provided expansion bolts.
- Mount the high bay light onto the installed brackets and secure it firmly using the supplied bolts and nuts.
- Using a screwdriver, open the outer end cover. Pass the cable through the waterproof connector and connect it to the terminal, ensuring that the Live (L), Neutral (N), and Ground wires are connected to their respective terminals correctly.
- Close the outer end cover with the screwdriver, tighten the cable gland clockwise to ensure a proper seal, and then switch on the power supply to verify that the light is operating correctly.
- Turn on the power and test the lamp.

DISMANTLING INSTRUCTIONS

(For Market surveillance team only)

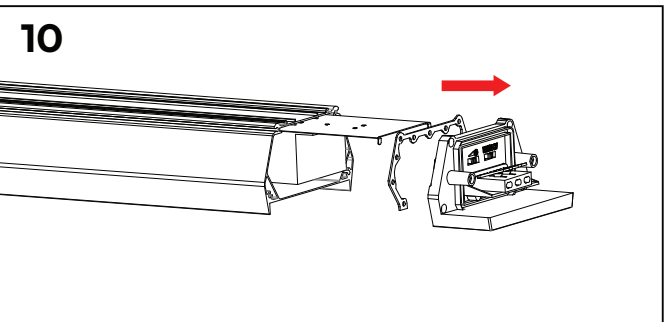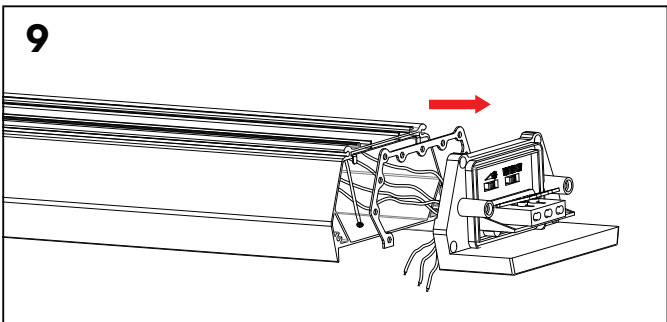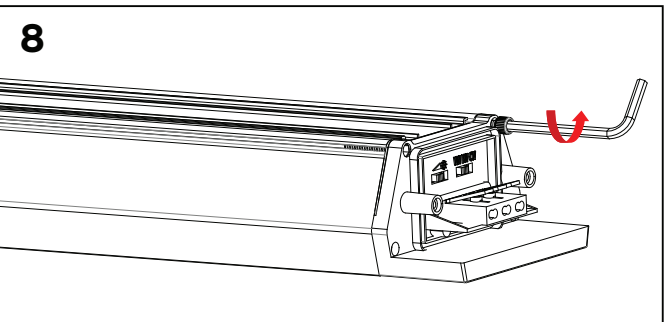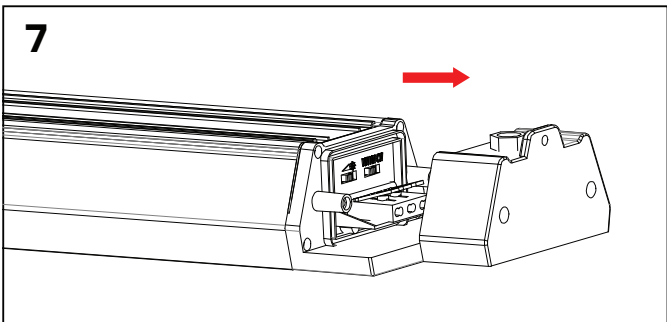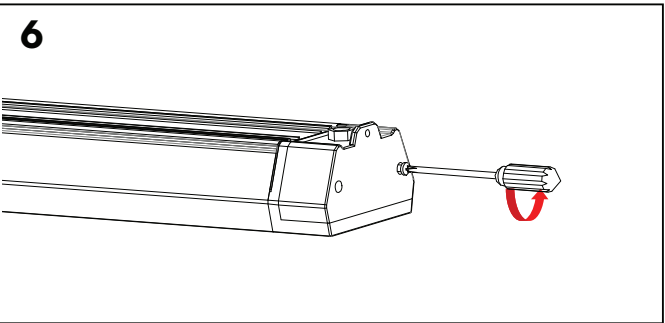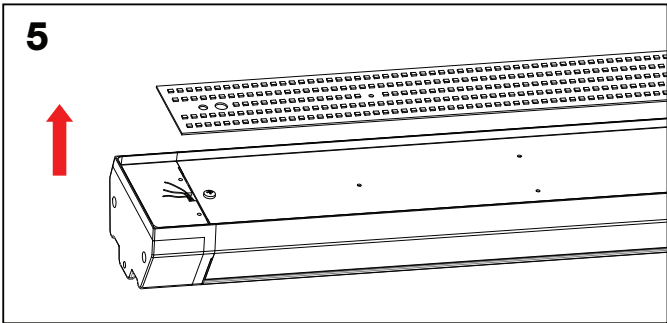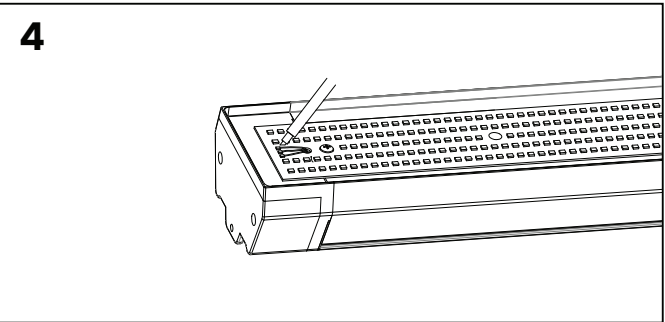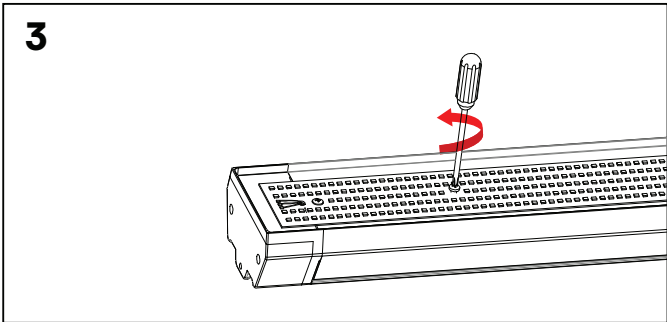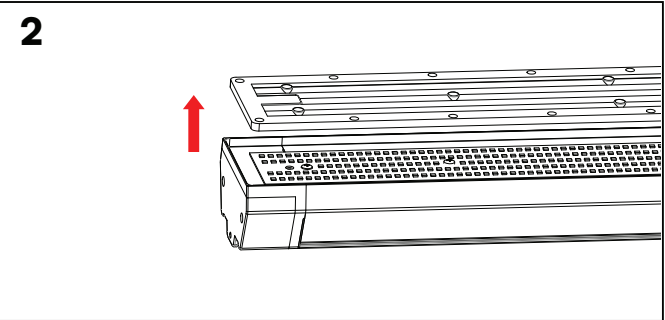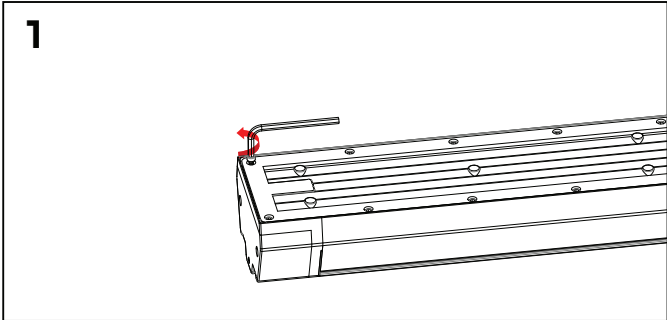

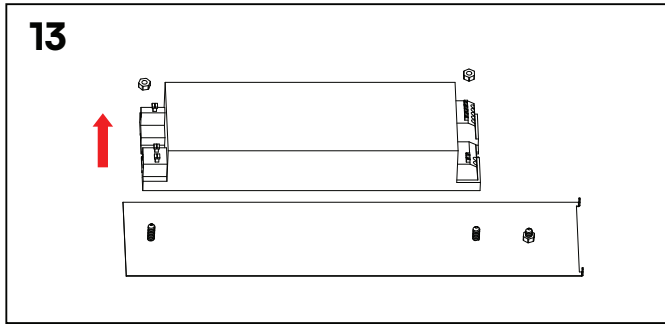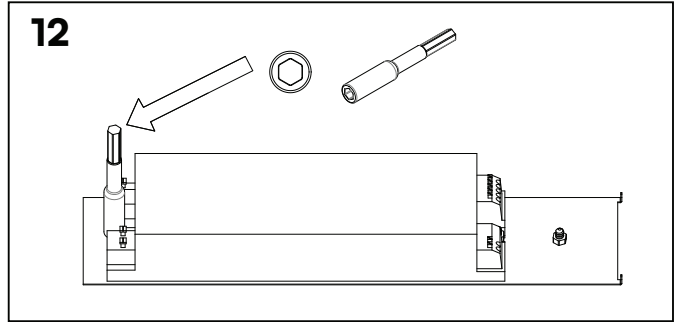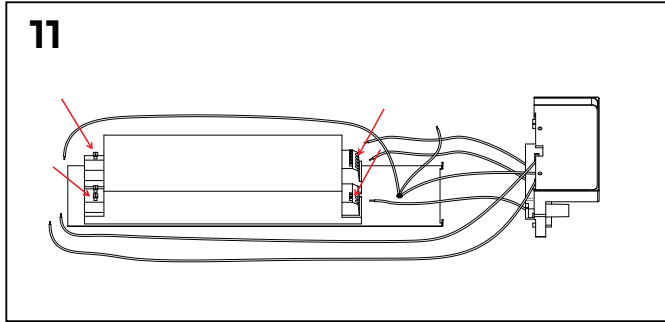

Note: Light source removal will void the warranty



V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT
SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX

V-TAC WEST EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT:
SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC WEST EUROPE LTD. GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN 02, IRELAND D02 P593