


FIRMAN[®]

OPERATOR'S MANUAL TRI-FUEL PORTABLE GENERATOR

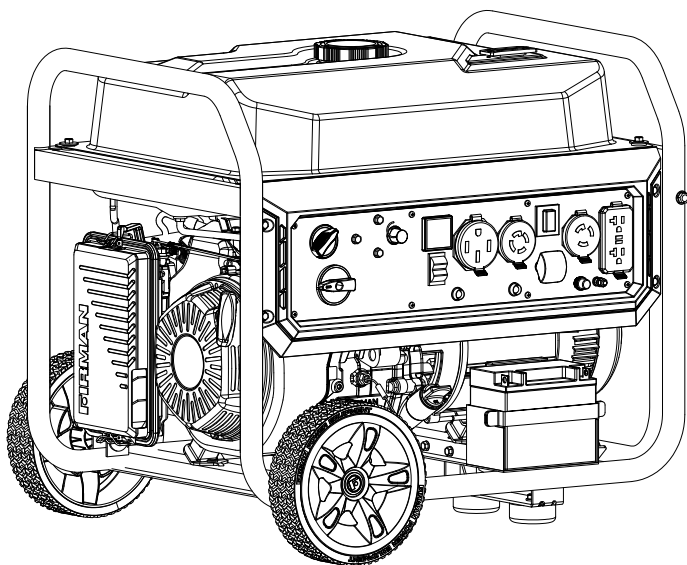

MODEL NUMBER

T11671

Rev Level:00

Record product information to reference when ordering parts or obtaining warranty coverage.

**DO NOT RETURN
TO STORE!**

CALL US FIRST
1-844-347-6261



**FOR QUESTIONS
OR SERVICE INFORMATION**

SERIAL NUMBER: _____

PURCHASE DATE: _____

Table of Contents

Introduction1

Features and Controls 5

Operation10

Maintenance - Storage..... 2 8

Troubleshooting- Specifications 3 5

Parts Diagrams - Parts Lists - Wiring Diagram 37

Service - Warranty..... 43

REGISTER YOUR PRODUCT

Register your product using the QR code provided or at www.firmanpowerequipment.com.



INTRODUCTION

Thank you for purchasing a FIRMAN generator. You have selected a high-quality, precision engineered generator set designed and tested to give you years of satisfactory service. This generator is Tri-Fuel and capable of running on gasoline, liquid petroleum gas (LPG), and natural gas (NG). This generator is not intended to be run unattended or to supply power to life safety support.

This manual contains safety information to make you aware of the hazards and risks associated with generator products and how to avoid them. This generator is designed and intended only for supplying electrical power for operating compatible electrical lighting, appliances, tools and motor loads, and is not intended for any other purpose. It is important that you read and understand these instructions thoroughly before attempting to start or operate this portable generator. Save these original instructions for future reference.

All information in this publication is based on the latest production information available at the time of approval for printing. The manufacturer reserves the right to change, alter or otherwise improve the generator and this documentation at any time without prior notice.



SIGNAL WORDS			
 DANGER	 WARNING	 CAUTION	NOTICE
Indicates a hazard which, if not avoided, will result in death or serious injury.	Indicates a hazard which, if not avoided, could result in death or serious injury.	Indicates a hazard which, if not avoided, could result in minor or moderate injury.	Indicates information considered Important, but not hazard-related.



Safety Alert Symbol- Indicates a potential personal injury hazard.



Operator's Manual- Failure to follow warnings, instructions and operator's manual could result in death or serious injury.



Toxic Fumes- Engine exhaust contains carbon monoxide, a poisonous gas that will kill you in minutes. You cannot smell it or see it.



Generator could cause electrical shock resulting in death or serious injury.



Fire- Fuel and its vapors are extremely flammable which could cause burns or fire resulting in death or serious injury. Engine exhaust could cause fire resulting in death or serious injury.



Hot Surface- Muffler could cause burns resulting in serious injury.



INTRODUCTION



WARNING! This product can expose you to chemicals including gasoline engine exhaust, which is known to the State of California to cause cancer, and carbon monoxide, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

This outdoor generator can be used to power outdoor items using extension cords or to restore home power using a transfer switch. A transfer switch is a separate device installed by a licensed electrician that allows the portable generator to be cord connected, using either of the 120/240V receptacles, directly into your home's electrical system. Install a listed transfer switch as soon as possible if this generator will be used to restore power to your home.

NOTICE If you have questions about intended use, contact FIRMAN customer service. This portable generator is designed to be used only with FIRMAN authorized parts.

System Ground


The generator has a system ground that connects the generator frame components to the ground terminals on the AC output receptacles. The system ground is connected to the AC neutral wire. The neutral is bonded to the generator frame.

Compliance Requirements


There may be Federal or State regulations, local codes, or ordinances that apply to the intended use of the generator. Consult a qualified electrician, electrical inspector, or the local agency having jurisdiction. This generator is not intended to be used at a construction site or similar activity as defined by NFPA 70-2026 (NEC) section 590.6.

To Restore Home Power Using a Listed Transfer Switch


Connections to your home's electrical system must use a listed* transfer switch installed by a licensed electrician. The connection must isolate the generator power from the utility power and comply with all applicable laws and electrical codes.

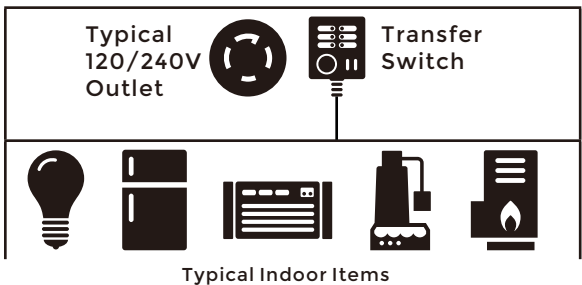

To Restore Power Using Extension Cords

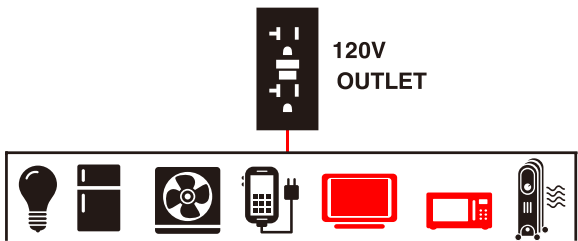

1. Only use grounded cords marked for outdoor use rated for your loads.

 To provide power using extension cords	
Total Amperage	Minimum Gauge, Outdoor Rated
	Up to 50 FT (15m)
Up to 13A	16
Up to 15A	14
Up to 20A	12
Up to 30A	10
Up to 50A	6

2. Follow cord safety instructions.
3. Install carbon monoxide alarm(s).
4. When operating portable generator with extension cords, make sure portable generator is located downwind in an open, outdoor area, at least 20 ft. (6 m.) from occupied spaces with exhaust pointed away.
5. Extension cords running directly into your home, powering indoor items IS NOT RECOMMENDED.




DANGER! Engine exhaust contains carbon monoxide, a poisonous gas that will kill you in minutes. You cannot smell it, see it, or taste it. Even if you do not smell exhaust fumes, you could still be exposed to carbon monoxide gas.

- Extension cords running directly into the home increase your risk of carbon monoxide poisoning through any openings.
 - If an extension cord running directly into your home is used to power indoor items, the operator recognizes that this increases the risk of CO poisoning to people inside the home and assumes that risk.
6. Install a listed *transfer switch as soon as possible if this or any generator will be used to restore power to your home.

*Certified by a Nationally Recognized Testing Laboratory that the product complies to appropriate product safety test standards.





FEATURES AND CONTROLS

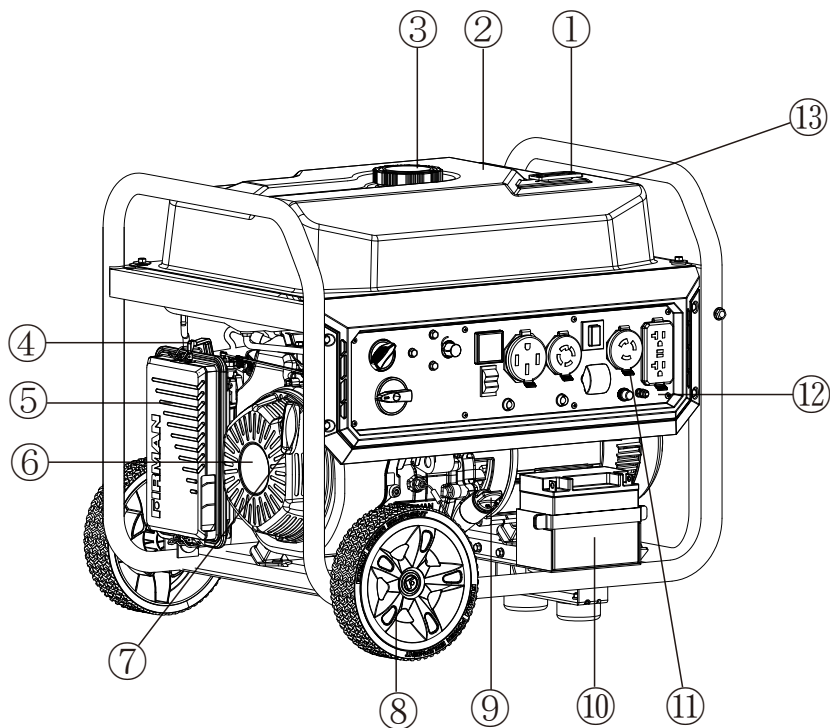

- | | |
|---------------------------------------|--------------------------------|
| 1- Fuel Gauge | 11- Outlet Cover |
| 2- 9.0 Gallon(34L) Capacity Fuel Tank | 12- Control Panel |
| 3- Fuel Cap | 13- Data Decal / Serial Number |
| 4- Choke Lever(behind air filter box) | |
| 5- Air Filter | |
| 6- 459cc FIRMAN OHV Engine | |
| 7- Recoil Starter | |
| 8- 9.0" Flat Free Wheel | |
| 9- Oil Filler Cap | |
| 10- Battery | |

*We are always working to improve our products. Therefore, the enclosed product may differ slightly from the image on this page.


FEATURES AND CONTROLS

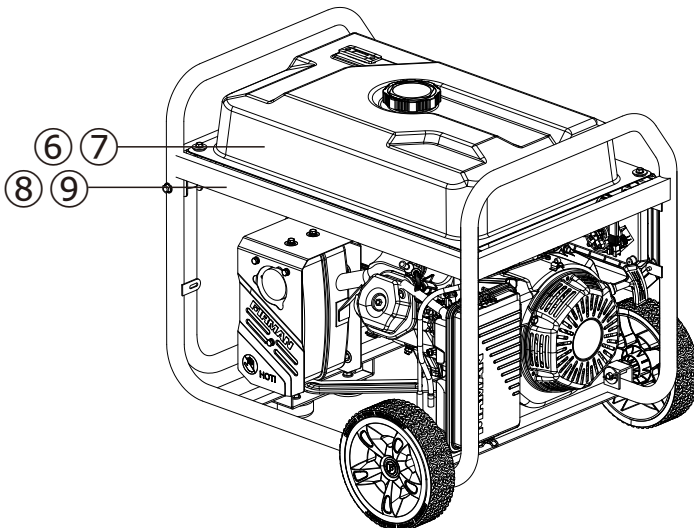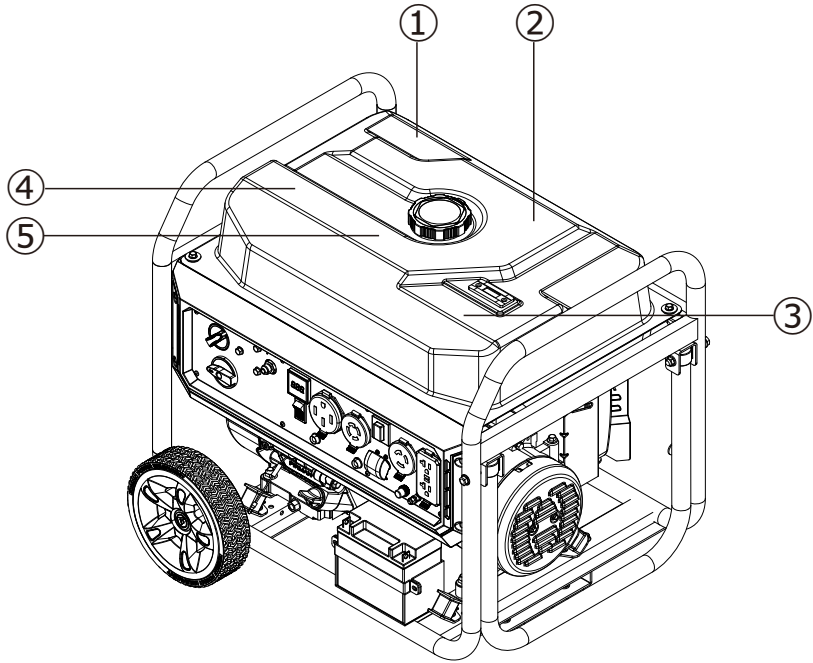

FEATURES AND CONTROLS

1

Fuel level indicator
Indicador de nivel de combustible



WARNING

Fuel is flammable which could cause burns resulting in death or serious injury. • Turn engine off and let it cool at least 2 minutes before refuelling. • Do not fill fuel above fuel level indicator. • Never add fuel to a hot or running generator.

AVERTISSEMENT

Le carburant est inflammable, ce qui peut provoquer des brûlures entraînant la mort ou des blessures graves. • Éteindre le moteur et le laisser refroidir au moins 2 minutes avant le remplissage. • Ne pas remplir au-delà de l'indicateur de niveau maximal de carburant. • Ne jamais ajouter de carburant à une génératrice chaude ou en marche.

ADVERTENCIA

El combustible es inflamable, lo que podría causar quemaduras resultantes en la muerte o lesiones graves. • Apague el motor y déjelo enfriar al menos 2 minutos antes de recargar combustible. • No llene el combustible por encima del indicador de nivel. • No cargue nunca combustible en un generador caliente o en funcionamiento.

2

 Failure to follow warnings, instructions and operator's manual will result in death or serious injury.	 Tampering with the CO ALERT system will cause Carbon Monoxide poisoning. Install Carbon Monoxide alarms inside home.	 El incumplimiento de las advertencias, las instrucciones y el manual del operador provocará la muerte o lesiones graves.
 Hot exhaust gases could cause fires. Keep at least 5 ft (1.5m) clearance from any combustibles or structures, including overhead.	 Generator could cause electrical shock. • Do not run indoors to avoid wet conditions. • Do not run in rain or wet weather. • Transfer switch must be used when connecting to a home's electrical system.	 La alteración del sistema de alerta de CO causará envenenamiento por monóxido de carbono. Instale detectores de Monóxido de Carbono dentro de su casa.  Los gases calientes de salida podrían causar incendios. Manténgase a una distancia mínima de 1,5m de cualquier combustible o estructura, incluyendo lugares elevados.  El generador podría producir una descarga eléctrica. • No utilice en interiores para evitar condiciones de humedad. • No utilice en la lluvia o en condiciones de humedad. • Es necesario usar un interruptor de transferencia cuando se conecta al sistema eléctrico de una casa.
		 Le non-respect des avertissements, des instructions et du manuel de l'opérateur entraînera la mort ou des blessures graves.  Toute altération du système D'ALERTE du monoxyde de carbone causera un empoisonnement au monoxyde de carbone. Installez des détecteurs de monoxyde de carbone à l'intérieur de la maison.  Les gaz d'échappement chauds peuvent provoquer des incendies. Gardez au moins 5 pi (1,5 m) de dégagement de tout combustible ou de toute structure, y compris au-dessus.  La génératrice pourrait provoquer un choc électrique. • Ne faites pas fonctionner à l'intérieur pour éviter les conditions humides. • Ne faites pas fonctionner sous la pluie ou par temps pluvieux. • Un commutateur de transfert doit être utilisé lors du raccordement au système électrique d'une maison.

3

	NOTICE Operate, store and transport on firm level surface. • Tilting can cause fuel spillage.	AVISO Operar, almacenar y transportar en una superficie firme y nivelada. • Inclinarlo puede causar un derrame de combustible.	AVIS Faire fonctionner, entreposer et transporter sur une surface plane et ferme. • Le basculement peut provoquer des déversements de carburant.	START GUIDE FOR PANEL INDICATOR LIGHT GUÍA DE INICIO PARA EL PANEL INDICADOR DE LUZ GUIDE DE DEMARRAGE POUR PANNEAU VOYANT 	SOLID RED - START SÓLID ROJO - INICIO SOLIDE ROUGE - ALLUMER  FLASHING RED - INTERMITTENT ROJO CLIGNOTANT  OFF - APAGADO ETEINDRE RESET FUEL SELECTOR TO OFF POSITION THEN RETRY REPOSICION SELECTOR DE COMBUSTIBLE A LA POSICION DE APAGADO Y LUEGO REINTENTAR LE RANTRAILLEMENT SELECTEUR EN POSITION D'ARRÊT, PUIS REESSAYEZ
--	--	---	---	--	---

4

Using a generator indoors CAN KILL YOU IN MINUTES. Generator exhaust contains carbon monoxide. This is a poison you cannot see or smell.	El uso de un generador en interiores PUEDO MATARLO EN MINUTOS. El escape del generador contiene monóxido de carbono. Este es un veneno que no se puede ver ni oler.	Utiliser une génératrice à l'intérieur peut vous tuer en quelques minutes. Les gaz d'échappement de la génératrice contiennent du monoxyde de carbone, un poison que vous ne pouvez ni voir ni sentir.
 NEVER use inside a home or garage, EVEN IF doors and windows are open.	 Only use OUTSIDE and far away from windows, doors, and vents.	 NE JAMAIS utiliser dans un garage ou à l'intérieur, MÊME avec les portes et les fenêtres ouvertes.
 Utilisez uniquement à l'extérieur, loin des fenêtres, portes et bouches d'aération.		



5

 AUTOMATIC SHUTOFF -YOU MUST:	 CORTE AUTOMÁTICO-DEBE REALIZAR LO SIGUIENTE:	 ARRÊT AUTOMATIQUE -VOUS DEVEZ:
 20 FT. (PIES) (6m) MIN. MOVE GENERATOR TO AN OPEN OUTDOOR AREA DOWNWIND. POINT EXHAUST AWAY FROM HOMES. DON'T RUN GENERATOR IN ENCLOSED AREAS (e.g. NOT IN HOUSE OR GARAGE). AIR OUT PREMISES (OPEN WINDOWS AND DOORS) BEFORE REOCCUPYING PROPERTY.	TRASLADAR EL GENERADOR A UNA ZONA EXTERIOR ABIERTA A FAVOR DEL VIENTO Y ALEJE EL TUBO DE ESCAPE DE LAS VIVIENDAS. NO UTILICE EL GENERADOR EN ÁREAS CERRADAS (POR EJEMPLO, NO EN LA CASA O EL GARAJE). VENTILE LAS INSTALACIONES (ABRA LAS VENTANAS Y LAS PUERTAS) ANTES DE VOLVER A OCUPAR LA PROPIEDAD.	DÉPLACEZ LA GÉNÉRATRICE PORTABLE À L'EXTÉRIEUR, DANS LE SENS DU VENT, AVEC L'ÉCHAPPEMENT DIRIGÉ LOIN DE LA MAISON. NE PAS FAIRE FONCTIONNER LA GÉNÉRATRICE DANS DES ESPACES CLOS (PAR EXEMPLE, NI DANS LA MAISON NI LE GARAGE). AÉRER LES LOCAUX (OUVRIR FENÊTRES ET PORTES) AVANT DE RÉOCCUPÉ LA PROPRIÉTÉ.
 MOVE TO FRESH AIR AND GET MEDICAL HELP IF SICK, DIZZY OR WEAK.	UBÍQUESE EN UN LUGAR DONDE CORRA AIRE FRESCO Y BUSQUE AYUDA MÉDICA SI SE SIENTE MAL, MAREADO O DÉBIL.	ALLEZ À L'AIR FRAIS ET OBTENEZ DE L'AIDE MÉDICALE EN CAS DE MALADIE, D'ÉTOURDISSEMENT OU DE FAIBLESSE.

6

 ⚠ WARNING	⚠ ADVERTENCIA	⚠ AVERTISSEMENT
Liquid Petroleum Gas (LPG) and Natural Gas (NG) are extremely flammable which could cause burns or fire resulting in death or serious injury. If you smell gas, close off all gas sources and contact a qualified plumber to inspect and repair the LPG or NG system. Do not place the LPG cylinder in the path of muffler outlet!	El gas licuado de petróleo (GLP) y el gas natural (GN) son extremadamente inflamables, lo que podría causar quemaduras o incendios que podrían provocar la muerte o lesiones graves. Si huele a gas, cierre todas las fuentes de gas y contacte a un plomero calificado para que inspeccione y repare el sistema de GLP o GN. ¡No coloque el cilindro de GLP en la vía de salida del silenciador!	Le gaz de pétrole liquéfié (GPL) et le gaz naturel (GN) sont extrêmement inflammables et pourraient causer des brûlures ou des incendies entraînant la mort ou blessures graves. Si vous sentez le gaz, fermez toutes les sources de gaz et contactez un plombier qualifié afin d'inspecter et de réparer le système GPL ou GN. Ne placez pas le cylindre de GPL dans le chemin de sortie du silencieux !

7

FOR RESIDENTS OF CALIFORNIA	PARA LOS RESIDENTES DE CALIFORNIA	POUR LES RÉSIDENTS DE LA CALIFORNIE
⚠ WARNING: This product and the engine exhaust from this product can expose you to chemicals including CO, which are known to the State of California to cause cancer or cause birth defects and other reproductive harm. For more information, go to www.P65Warnings.ca.gov.	⚠ ADVERTENCIA: Este producto y el escape del motor de este producto pueden exponerlo a productos químicos, incluido CO, que en el estado de California son conocidos por causar cáncer o causar defectos de nacimiento u otros daños reproductivos. Para obtener más información, vaya a www.P65Warnings.ca.gov.	⚠ AVERTISSEMENT: Ce produit et l'échappement du moteur de ce produit peuvent vous exposer à des produits chimiques, y compris le CO, qui sont connus par l'État de Californie pour causer le cancer ou causer des malformations congénitales et autres problèmes de reproduction. Pour plus d'informations, visitez www.P65Warnings.ca.gov.

8


Point engine exhaust away from all occupied structures.	Mantenga los gases de escape del motor lejos de instalaciones ocupadas.	Pointer l'échappement du moteur loin de toutes les structures occupées.	NOTICE	AVISO	AVIS
			To prevent engine damage the spark arrester should be cleaned every 100 hours. See Operator's manual.	Para evitar daños en el motor, el supresor de chispas debe limpiarse cada 100 horas. Consulte el manual del operador.	Pour éviter d'endommager le moteur, le pare-étincelles devrait être nettoyé toutes les 100 heures. Éloignez l'échappement du moteur des structures occupées. Voir le manuel de l'utilisateur.

9

 ⚠ WARNING	⚠ ADVERTENCIA	⚠ AVERTISSEMENT
Muffler could cause burns resulting in serious injury. • Do not touch hot parts • Avoid hot exhaust gases	El silenciador podría causar quemaduras resultando en una lesión grave. • No toque las partes calientes • Evite los gases de escape calientes	Le silencieux pourrait causer des brûlures entraînant des blessures graves. • Ne touchez pas les pièces brûlantes. • Évitez les gaz d'échappement chauds

FEATURES AND CONTROLS

Control Panel

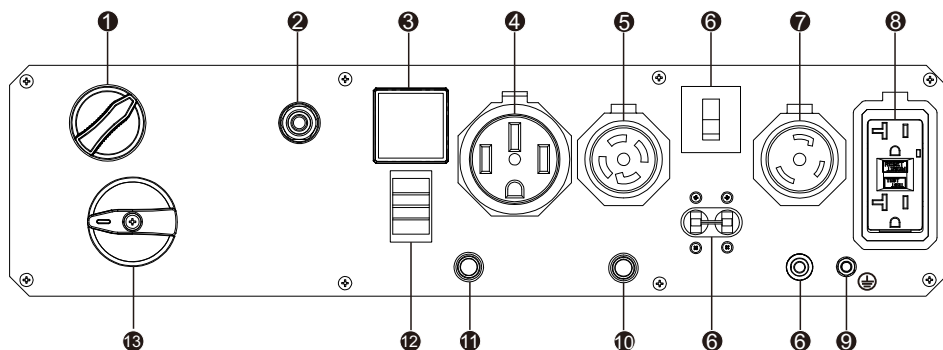

NOTICE Total power drawn from all receptacles must not exceed the data decal rating.

1. **LPG/NG Selector Switch** - Used to select LPG and NG.

2. **LPG/NG Hose Connector (Inlet: 3/8" Flare Male)** - Used to connect LPG/NG hose to generator.

3. **3-1 Data-Minder (Multi-Meter)** - Push the SELECT button to show the Voltage, Hertz and running hours.

4. **120/240V, 50A** - (NEMA 14-50R) (Not GFCI protected)

A maximum of 38.75 Amps current for 240 Volts or two independent 120 Volt loads at 38.75 Amps current each.

5. **120/240V, 30A Twist Lock** - NEMA L14-30R (Not GFCI protected)

A maximum of 30 Amps current for 240 Volts or two independent 120 Volt loads at 30 Amps current each.

6. **Circuit Breakers** - The receptacles are protected by AC circuit protectors. If the generator is overloaded or an external short circuit occurs, a circuit protector may trip. If tripping occurs, disconnect all electrical loads and determine the cause before attempting to continue using the generator. Reset any tripped circuit protectors.

If multiple receptacles are used at the same time, the total current must be kept with-in the portable generator data decal rating.

7. **120V, 30A Twist Lock** - NEMA L5-30R (Not GFCI protected)

A maximum of 30 Amps current may be drawn from this receptacle.

8. **120V, 20A Duplex GFCI** (Ground Fault Circuit Interrupter)- NEMA 5-20R

A maximum of 20 Amps current may be drawn from this duplex receptacle.

9. **Ground Terminal** - Consult an electrician or authority having jurisdiction for local grounding requirements.

10. **Indicator Light** - When the main fuel selector switch is turned to the GAS or LPG/NG position, the indicator light will turn RED for up to 4 minutes (before going off). Starting the engine successfully anytime during the 4 minutes will turn the indicator light GREEN. See Indicator light-Battery Power Saving Mode section for more information.

11. **CO Alert™ Carbon Monoxide (CO) Shutdown Indicator Light** - Indicates the engine shutdown due to carbon monoxide accumulation around the generator or a CO Alert system fault occurred.

12. **Engine Switch** - To start engine, press and hold the switch in the START (II) position, the engine will crank and attempt to start. When the engine starts, release the switch to the RUN (I) position.

13. **Main Fuel Selector Switch** - Use to select and turn on gasoline (GAS) or LPG/NG fuel source.

1. Location




DANGER! Engine exhaust contains carbon monoxide, a poisonous gas that could kill you in minutes. You **CANNOT** smell it, see it, or taste it. Even if you do not smell exhaust fumes, you could still be exposed to carbon monoxide gas.

- Operate portable generator only outdoors and downwind at least 20 ft. (6 m) from occupied spaces with exhaust pointed away to reduce the risk of carbon monoxide accumulating.
- Install battery-operated carbon monoxide alarms or plug-in carbon monoxide alarms with battery back-up according to the manufacturer's instructions. Smoke alarms cannot detect carbon monoxide gas.
- Do not run this portable generator inside homes, garages, basements, crawlspaces, sheds, or other partially-enclosed spaces even if using fans or opening doors and windows for ventilation. Carbon monoxide can quickly build up in these spaces and can linger for hours, even after this product has shut off.
- If you start to feel sick, dizzy, weak or your home's carbon monoxide alarm sounds, get to fresh air right away. Call emergency services. You may have carbon monoxide poisoning.

Carbon Monoxide Alarm(s)

Install carbon monoxide alarms inside your home. Without working carbon monoxide alarms, you will not realize you are getting sick and dying from carbon monoxide poisoning.




Prevent Carbon Monoxide (CO) Poisoning

Use outdoors and downwind at least 20 ft. (6 m) from any home. Point exhaust away from all homes and occupied spaces. Install CO alarms inside your home.



20 ft. (6 m) min.



To better educate yourself about all carbon monoxide risks, go to www.takeyourgeneratoroutside.com.


OPERATION

Reduce Risk of Fire





WARNING! Exhaust heat/gases could ignite combustibles, structures or damage fuel tank causing a fire, resulting in death or serious injury.

- Keep portable generator at least 5 ft. (1.5m) from any structure, trees or vegetation over 12 in. (30 cm) in height.
- Select an outdoor site that is dry and protected from the weather. Do not move portable generator indoors to protect it from the weather.
- Do not locate the portable generator under a deck or other similar structure that may confine heat and airflow.

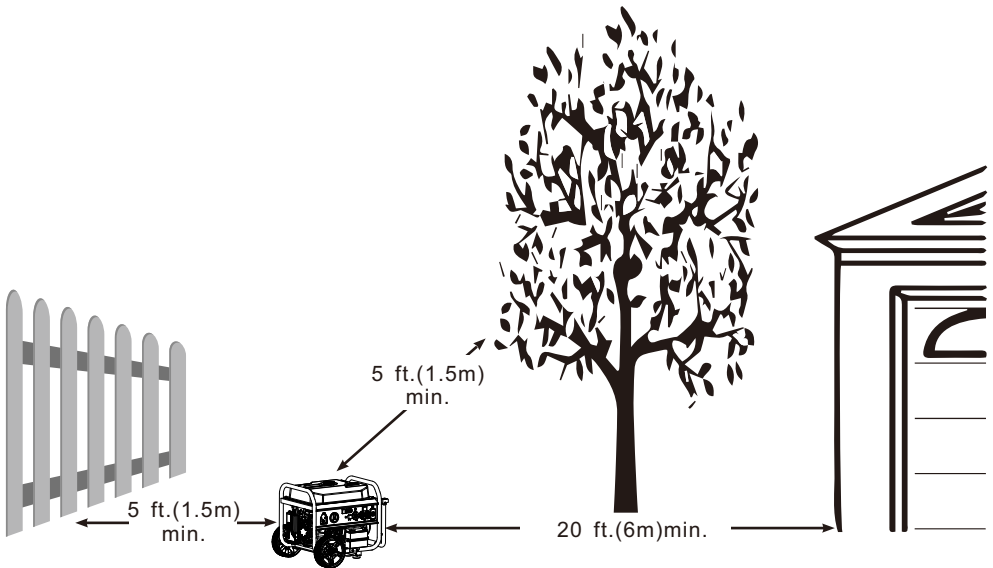

Connect the Battery




NOTICE Be sure to connect the battery before attempting to start the generator.

2, Oil and Gasoline / LPG/ NG


Add Engine Oil

We recommend using SAE 10W-30 API SL or higher oil for best performance. Do not use special additives. Ambient temperature determines the proper oil viscosity for the engine. Use the chart to select the proper oil for the outdoor temperature range expected.

NOTICE Do not attempt to crank or start the engine before it has been properly filled with the recommended type and amount of oil. Damage due to operation with no oil will void your warranty.

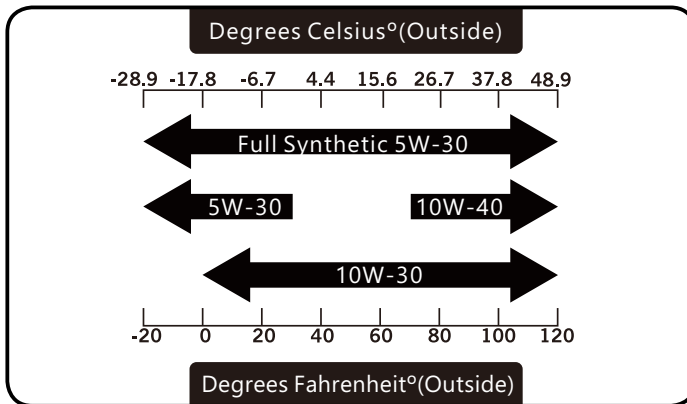


1. Place generator on a flat, level surface.
2. Clean area around oil fill and remove yellow oil fill cap/dipstick.
3. Wipe dipstick clean.

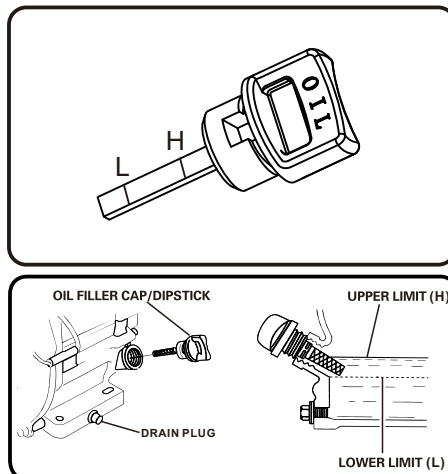

OPERATION

4. Using oil funnel, slowly pour contents of provided oil bottle into oil fill opening until oil reaches upper limit "H" mark on the dipstick. Be careful not to overfill. Overfilling could cause engine starting problems or engine damage.

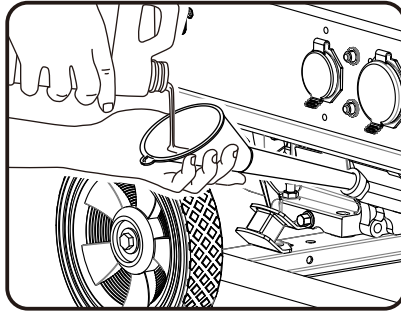

5. Replace oil fill cap/dipstick and fully tighten.

6. Oil level should be checked prior to each use or at least every 8 hours of operation. Keep oil level maintained.

Low Oil Shutdown

The portable generator is equipped with a low oil shutdown. If the oil level drops below the minimum required level, a sensor will activate an internal switch stopping the engine. If the engine shuts off and the oil level is within specifications, check to see if generator is sitting at an angle. Place portable generator on an even surface to correct this. If engine fails to start, the oil level may not be high enough to deactivate the internal low oil level switch. Make sure the sump is completely full of oil to the upper limit (H). Do not operate engine until oil level issue is corrected. Contact Firman customer service.

Add Gasoline



WARNING! Fuel and its vapors are extremely flammable which could cause burns or fire resulting in death or serious injury.

- Turn generator engine OFF and let it cool at least 2 minutes before removing fuel cap.
- Do Not refuel or move generator when engine is running.
- Move generator outdoors prior to adding or draining fuel
- Keep fuel away from any ignition sources.
- Do not overfill tank, allow space for fuel expansion.
- If any fuel spills, wait until it evaporates before starting engine
- Check and replace fuel lines, tank, cap, and fittings prior to each use if any damage or leaks are found.



Fuel must meet these requirements:

- Clean, fresh, unleaded gasoline with a minimum of 87 octane.
- For high altitude use, see Operation at High Altitude.
- Gasoline with no more than 10% ethanol is acceptable.



NOTICE Do not mix oil in gasoline or modify engine to run on alternate fuels not described in this manual. Use of unapproved fuels could damage engine and will not be covered under warranty.

- 1. Clean area around fuel fill cap, remove cap.
- 2. Slowly add unleaded fuel to fuel tank. Be careful not to fill above the RED fuel level indicator. This allows adequate space for fuel expansion.

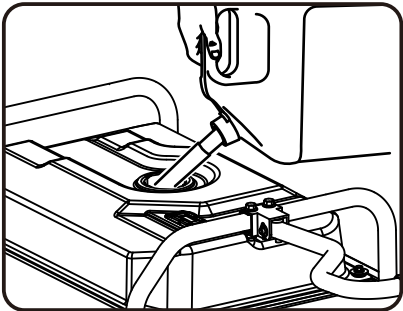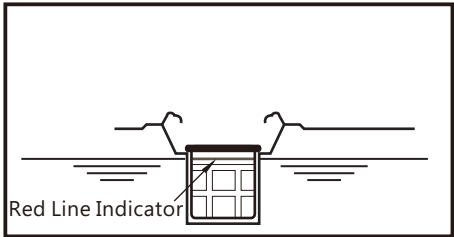

- 3. Install fuel cap and let any spilled fuel evaporate before starting engine.

Operation at High Altitude

At altitudes over 5,000 feet(1524 meters), a minimum 85 octane gasoline is acceptable. Engine power and generator output will be reduced approximately 3.5% for every 1000 feet (305 m) of elevation above sea level. High altitude may cause hard starting, increased fuel consumption and sparkplug fouling. To operate at high altitudes FIRMAN can provide a high altitude carburetor main jet. The alternative main jet and installation instructions can be obtained by contacting Customer Support.

	459cc	Altitude
Altitude main jet 1	393717004	3000-6000Feet
Altitude main jet 2	393717005	6000-8000Feet

NOTICE Operation using an alternative main jet at elevations lower than the recommended minimum altitude can damage the engine. For operation at lower elevations, the standard main jet supplied must be used. Operating the engine with the wrong main jet may increase exhaust emissions, fuel consumption and reduce performance.

Operation at High Ambient conditions

Your Firman Power Equipment product is designed and rated for continuous operation at ambient temperatures up to 104°F (40°C). The generator may be operated at temperatures ranging from 5°F(-15°C) to 122°F(50°C) for short periods. If the generator is exposed to temperatures outside this range during storage, the generator should be brought back within this range before operation. When operated above 77°F(25°C) there may be a decrease in power. Maximum wattage and current are subject to and limited by such factors as ambient temperature, altitude, engine conditions etc.



OPERATION


Connecting LPG/ NG Fuel



WARNING! Liquid Petroleum gas (LPG) and Natural Gas (NG) are extremely flammable which could cause burns or fire resulting in death or serious injury.


- The fuel supply line must always be shut off when the engine is not running. Failure to shut off fuel may allow fuel to leak at the generator.
 - Do not place the LPG/NG sources in the path of muffler outlet or near any ignition source.
 - Keep a fire extinguisher near the generator all the time.
 - Do not use or store LPG/NG portable sources not in use near generator or in a building, garage or enclosed area.
 - All LPG/NG supply/ piping lines must be installed by a qualified plumber.
 - If you smell gas, close off all gas sources and contact a qualified plumber to inspect and repair the LPG or NG system.
- Prior to each days first use spray a soapy water solution on LPG/NG fuel connections to check for leaks.
- Never use a gas container, LPG/ NG connector hose, LPG cylinder or NG source that appears to be damaged.
 - Do not connect or disconnect the LPG/ NG source in an enclosed area.
 - LPG is heavier than air and can accumulate in confined / low spaces if there is a leak.

NOTICE If a fuel supply connection is necessary it must be installed in accordance with all local codes or regulations, or in the absence of local codes or regulations, in accordance with the National Fuel Gas Code (NFPA 54/ANSI Z223.1) and CSA B149.1 (Natural Gas and Propane Installation Code), as applicable. If possible the fuel supply connection should be close to the outdoor operating location. This will reduce the cost of the flexible fuel run. An approved flexible fuel line must be installed between the generator LPG/NG Hose Connector (Inlet) and the fuel supply connection. In no case should this information be interpreted to conflict with any local, state, or national code. If in doubt, always follow local codes.

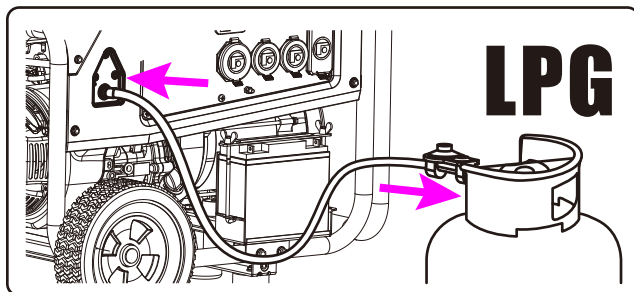

- Always keep the LPG cylinder in an upright position.
- Use only DOT LPG cylinders in vapor service with type 1, right hand ACME threads. Verify the re-qualification date on the cylinder has not expired.
- All new cylinders must be purged of air and moisture prior to filling. The purging process should be done by your propane gas supplier.

Attach the LPG regulator hose assembly (included) to the LPG hose connector (inlet) on the control panel of the generator. Tighten the nut with a 19 mm or adjustable wrench. Remove the safety plug or cap from the LPG cylinder valve. Attach the LPG regulator to the cylinder valve. Do not use a wrench to tighten LPG cylinder nut. Tighten the nut by hand clockwise to a positive stop. Using a wrench may damage LPG cylinder components.

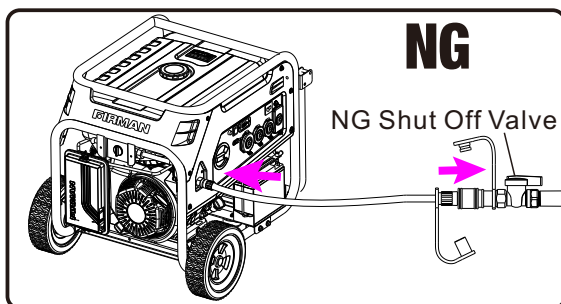

Connect the locally approved flexible fuel supply line (not included) to the LPG/NG connector (inlet) on the control panel and the fuel Source. We recommend you use FIRMEN 25ft (7.62m) Quick Connect Hose Kit (Model 1815) or 10ft (3m) Quick Connect Hose Kit (Model 1805) for Natural Gas (NG) connection (This item is not included). Hose requirements may vary in different regions depending on local codes. Contact your local licensed plumber to ensure complete compliance with all codes. Make sure the NG source location and hose used allows the portable generator to be located at least 20ft (6m) from any occupied spaces.

Indicator light - Battery Power Saving Mode


This generator is equipped with an electronic module which consumes battery power. When the main fuel selector switch is turned to the GAS or LPG/NG position, the indicator light will turn RED for up to 4 minutes (before going off). Starting the engine successfully anytime during the 4 minutes will turn the indicator light GREEN. If portable generator is not started during this 4-minute period the portable generator will switch to Battery Power Saving Mode to conserve battery life.

NOTICE Your portable generator is equipped with an internal battery charger that will properly charge the battery only when the engine is running.

The generator cannot be started in Battery Power Saving Mode. Turn main fuel selector switch to the off position and back to the GAS or LPG/NG position to reset the RED indicator 4-minute electronic module.


3.Starting the Generator on Gasoline

1. Before starting the generator, check for loose or missing parts and for any damage which may have occurred during shipment. Ensure spark plug, muffler, fuel cap, and air cleaner are all in place.
2. Operate portable generator only outdoors and downwind at least 20 ft. (6 m) from occupied spaces with exhaust pointed away to reduce the risk of carbon monoxide accumulating.
- 3.If connected make sure the LPG cylinder knob or the NG source valve are fully closed or disconnected.

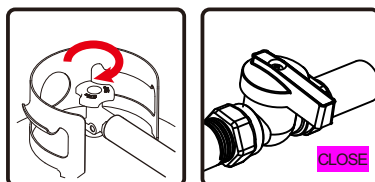


OPERATION

4. Turn the main fuel selector switch to "GAS" position.




NOTICE When the main fuel selector switch is turned to the GAS position, the indicator light will turn RED for up to 4 minutes (before going off). Starting the engine successfully anytime during the 4 minutes will turn the indicator light GREEN. See Indicator light-Battery Power Saving Mode section for more information.


5. Disconnect all electrical loads from the generator. Never start or stop the generator with electrical devices plugged in.




6. Turn the engine switch to the "ON"(I) position.



7. Move choke lever located on engine to "START" position. You do not need to choke a warm engine. (For electric start move to step (9))




8. For recoil start only - Pull the starter cord slowly until resistance is felt and then pull rapidly to start engine.



9. For electric start only - Flip the engine switch to the START (II) position for a few seconds and then release.



10. Do not over-choke. As soon as engine starts and warms up, slowly move the choke lever to the RUN position.




11. Allow portable generator to run at no load for a few minutes to stabilize before plugging in any electrical devices.


NOTICE If engine starts but fails to run, or if portable generator shuts down during operation, check oil level. See Low Oil Shutdown section for more information.

4. Starting the Generator on LPG

1. Before starting the generator, check for loose or missing parts and for any damage which may have occurred during shipment. Ensure spark plug, muffler, fuel cap, and air cleaner are all in place.
2. Operate portable generator only outdoors and downwind at least 20 ft. (6 m) from occupied spaces with exhaust pointed away to reduce the risk of carbon monoxide accumulating.
3. Connect the LPG hose with regulator to both LPG cylinder and portable generator LPG/NG Hose Connector (inlet).

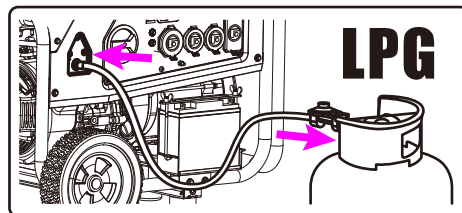


4. Fully open the LPG cylinder knob.



OPERATION


5. Turn the main fuel selector switch to LPG/NG position.




NOTICE When the main fuel selector switch is turned to the LPG/NG position, the indicator light will turn RED for up to 4 minutes (before going off). Starting the engine successfully anytime during the 4 minutes will turn the indicator light GREEN.

See Indicator light-Battery Power Saving Mode section for more information.


6. Turn the LPG/NG selector switch to LPG position.




7. Disconnect all electrical loads from the generator. Never start or stop the generator with electrical devices plugged in.




8. Turn the engine switch to the "ON"(I) position.




9. Move choke lever located on engine to "START" position. You do not need to choke a warm engine. (For electric start move to step (11))




10. For recoil start only - **PULL-TO-PRIME** Pull the starter cord 1-2 times. Pull slowly until resistance is felt and then pull rapidly.



11. For recoil start only - Move the choke lever to the "RUN" position.



12. For recoil start only - **PULL-TO-RUN** Pull the starter cord slowly until resistance is felt and pull rapidly to run the portable generator.




If the engine fails to start in 1-2 pulls with choke in the RUN position, move choke lever to START position and repeat the PULL-TO-PRIME step (10).

13. For electric start only - Flip the engine switch to the START (II) position for a few seconds and then release.



14. For electric start only - Move the choke lever to the RUN position.




15. Allow portable generator to run at no load for a few minutes to stabilize before plugging in any electrical devices.

NOTICE If engine starts but fails to run, or if portable generator shuts down during operation, check oil level. See **Low Oil Shutdown** section for more information.

OPERATION

NOTICE Observing frost on LPG cylinder and regulator is common during operation and normally is not an indication of a problem. In unusual situations this frost may eventually restrict the flow of LPG gas to the generator resulting in deteriorating performance. In these rare situations it can be helpful to:


- Exchanging fuel cylinders to allow the first cylinder to warm up, repeating as necessary.
- Placing the LPG cylinder at the end of the generator near the handle, where engine fan air flows out from the generator. This air is slightly heated by air flowing over the engine.
- Do not place the LPG cylinder in the path of the muffler exhaust outlet.

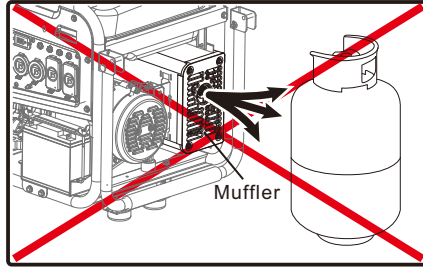


- The LPG cylinder and components can be temporarily warmed by pouring warm water over them.

5. Starting the Generator on NG


1. Before starting the generator, check for loose or missing parts and for any damage which may have occurred during shipment. Ensure spark plug, muffler, fuel cap, and air cleaner are all in place.
2. Operate portable generator only outdoors and downwind at least 20 ft. (6 m) from occupied spaces with exhaust pointed away to reduce the risk of carbon monoxide accumulating.
3. Connect the NG hose to both the NG source and portable generator LPG/NG Hose Connector (inlet).

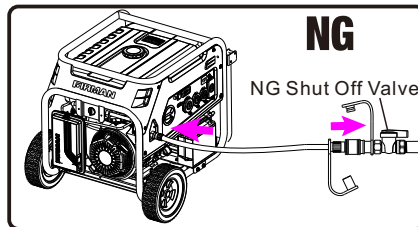

4. Fully open the NG source valve.




5. Turn the main fuel selector switch to LPG/NG position.




NOTICE When the main fuel selector switch is turned to the LPG/NG position, the indicator light will turn RED for up to 4 minutes (before going off). Starting the engine successfully anytime during the 4 minutes will turn the indicator light GREEN.

See Indicator light-Battery Power Saving Mode section for more information.


6. Turn the LPG/NG selector switch to NG position.




7. Disconnect all electrical loads from the generator. Never start or stop the generator with electrical devices plugged in.



8. Turn the engine switch to the "ON"(I) position.




9. Move choke lever located on engine to "START" position. You do not need to choke a warm engine. (For electric start move to step (11))




OPERATION


10. For recoil start only - PULL-TO-PRIME Pull the starter cord 1-2 times. Pull slowly until resistance is felt and then pull rapidly.



11. For recoil start only - Move the choke lever to the "RUN" position.



12. For recoil start only - PULL-TO-RUN Pull the starter cord slowly until resistance is felt and pull rapidly to run the portable generator.




If the engine fails to start in 1-2 pulls with choke in the RUN position, move choke lever to START position and repeat the PULL-TO-PRIME step (9).

13. For electric start only - Flip the engine switch to the START (II) position for a few seconds and then release.



14. For electric start only - Move the choke lever to the RUN position.



15. Allow portable generator to run at no load for a few minutes to stabilize before plugging in any electrical devices.


NOTICE If engine starts but fails to run, or if portable generator shuts down during operation, check oil level. See **Low Oil Shutdown** section for more information.

6. Connecting Electrical Loads

This portable generator has been pretested and adjusted to handle its full capacity. The voltage is regulated using an automatic voltage regulator (AVR). Readjusting the AVR will void warranty.

The duplex receptacle is equipped with GFCI protection. The GFCI protects against electric shock that may be caused if you become a path which electricity travels to reach earth. Even with a GFCI you may feel a shock, but the GFCI cuts power quickly so an average person should not suffer any injury. Manual test GFCI while generator is running to verify internal contacts will function

- Push the test button. The reset button will pop out, which should cut power to outlet.
- Press the reset button until it locks in the depressed position. If the GFCI does not reset as described do not use the receptacles. Call Firman customer service.
- If GFCI trips while in use, reset and test the outlet. Electric cords laying on the ground with worn insulation may trip the GFCI, only use cords in good condition.

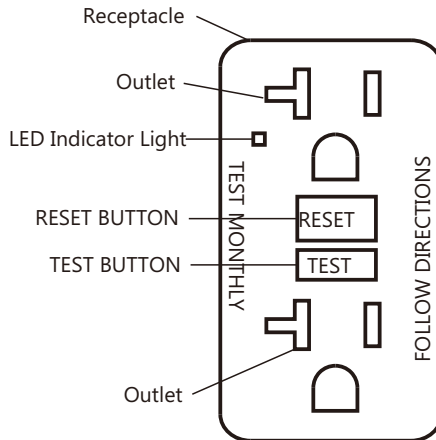

SELF-TEST OPERATION

In addition to the manual test / reset feature the GFCI receptacle tests itself periodically to confirm the GFCI electronics are functional. The indicator light will be solid green when the GFCI is powered from the generator and working correctly.

Self-test indications: If the indicator light is solid orange or flashing red a problem may exist. Press the TEST button to trip the GFCI. If unable to reset, replace the GFCI.




WARNING! Generator voltage could cause electrical shock or burn resulting in death or serious injury.

- Damaged or overloaded extension cords could overheat, arc, and burn resulting death or serious injury.
- Use a ground fault circuit interrupter (GFCI) in any damp or highly conductive area, such as metal decking.
- Do not touch bare wires or receptacles.

OPERATION

- Do not use generator with electrical cords which are worn, frayed, bare or otherwise damaged.
 - Do not operate generator in the rain or wet weather.
 - Do not run indoors to avoid wet conditions.
 - Do not handle generator or electrical cords while standing in water, while barefoot, or while hands or feet are wet.
- Use listed transfer switch to prevent backfeed by isolating generator from electric utility workers.

1. Ensure circuit breaker on control panel is in the closed (on) position.
2. Start the generator with no electrical load attached.
3. Allow the engine to run for several minutes to stabilize.
4. Plug in and turn on the first item. It is best to attach the item with the largest load first.
5. Allow the engine to stabilize.
6. Plug in and turn on the next item.
7. Allow the engine to stabilize.
8. Repeat steps 5-6 for each additional item.



Surge Protection

There is a remote chance that voltage fluctuations may impair the proper functioning of some sensitive electronic equipment. Electronic devices, including computers and many programmable appliances may use components that are designed to operate within a narrow voltage range and may be affected by the portable generator's momentary voltage fluctuations. While there is no way to prevent all voltage fluctuations, you can take steps to protect your sensitive electronic equipment. Install a plug-in surge suppressor on the receptacles feeding your sensitive equipment. Surge suppressors come in single or multi-outlet styles. They are designed to protect against short duration voltage fluctuations.

CO Alert

Carbon Monoxide (CO) Shutdown System

CO Alert automatically shuts down the engine when harmful levels of carbon monoxide accumulate around the generator or a CO Alert fault occurs. After shutdown, the CO Alert indicator light will blink for at least five minutes per the chart below.

CO Alert DOES NOT replace carbon monoxide alarms.

Install battery-powered carbon monoxide alarm(s) in your home. Don't run generator in enclosed areas.

Color	Description
Red ●●●●●	Carbon monoxide accumulated around generator. Prior to restart move generator to an open, outdoor area downwind and at least 20 ft. (6 m) from occupied spaces with exhaust pointed away. Air out premises (open windows and doors) before reoccupying property. Automatic shutoff is an indication generator was improperly located. If you start to feel sick, dizzy, weak, or your homes carbon monoxide alarm sounds while using this product, get to fresh air right away. Call emergency services. You may have carbon monoxide poisoning.
Yellow ●● ●●	CO Alert fault occured*. See FIRMAN authorized service dealer.

*Yellow light will blink for five seconds at the startup of generator to show CO ALERT is functioning properly.




OPERATION

7. Stopping the generator

1. Turn off and remove all electrical loads.


Never stop the generator with electrical devices plugged in and turned on.

Never stop the engine by moving the choke to the start position.




Let the generator run at no-load for one minute to stabilize internal temperatures of the engine and generator.



2. Turn the engine switch to OFF (O) position.



3. Turn the main fuel selector switch to OFF (O) position.



4. Fully close the LPG cylinder knob and NG source valve.



MAINTENANCE SCHEDULE

ITEM	NOTES	Daily(Before operation)	Initial 25 hours	Every 50 hours	Every 100 hours (or annual)	Every 250 hours
Spark Plug	Check condition. Adjust gap and clean. Replace if necessary.				✓	
Engine Oil	Check oil level.	✓				
	Replace.		✓		✓	
Air Filter	Clean, replace if necessary.			✓		
Fuel	Clean fuel tank strainer. Replace if necessary.				✓	
Fuel Line	Check fuel hose for cracks or other damage. Replace if necessary.	✓				
LPG Regulator /Hose Assy.	Check for damage and leaks. Replace if necessary.	✓				
Exhaust System	Check for leakage. Retighten or replace gasket if necessary.	✓				
	Check spark arrester screen. Clean/Replace if necessary.				✓	
Engine	Check adjust valve clearance. *					✓
	Clean combustion chamber. *					✓
Fittings/ Fasteners	Check. Replace if necessary.				✓	

* To be performed by knowledgeable/experienced owner or by authorized service center.

General Recommendations

Regular maintenance will improve the performance and extend the life of the generator. See any authorized dealer for service.

The generator's warranty does not cover items that have been subjected to operator abuse or negligence. To receive full value from the warranty, the operator must maintain the generator as instructed in this manual.

Some adjustments will need to be made periodically to properly maintain your generator.

All service and adjustments should be made at least once each season. Follow the requirements in the maintenance shedule chart above.

NOTICE Once a year you should clean or replace the spark plug and replace the air filter. New spark plugs and clean air filter assure proper fuel-air mixture and help your engine run at peak performance and last longer.

Maintenance - Storage

When Transporting Generator

Transport with fuel tank EMPTY or with main fuel valve in OFF position.
Do not tip generator at an angle which causes fuel to spill.
Disconnect LPG/ NG fuel hose and securely stow away.

ENGINE MAINTENANCE

To prevent accidental starting, remove and ground spark plug wire before performing any service.

Change Engine Oil

Change engine oil every 100 hours. (for a new engine, change oil after 25 hours.)


If you are using your generator under extremely dirty or dusty conditions, or in extremely hot weather change the oil more often.

CAUTION! Avoid prolonged or repeated skin contact with used motor oil. Used motor oil has been shown to cause skin cancer in certain laboratory animals. Thoroughly wash exposed areas with soap and water.





KEEP OUT OF REACH OF CHILDREN. DON'T POLLUTE. CONSERVE RESOURCES. RETURN USED OIL TO COLLECTION CENTERS.

(a) On a level surface drain oil into a suitable container by removing the drain plug and the oil filler cap while the engine is warm.





(b) Reinstall the drain plug and fill the engine with oil until it reaches the HIGH(H) level on the oil filler dipstick.

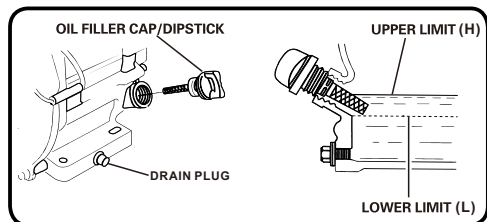


NOTICE We recommend using SAE 10W-30 API SL or higher oil for best performance. Do not use special additives. See **Oil and Gasoline / LPG/ NG**

Air Filter Maintenance

(a) Carefully remove foam air filter element and wash it with liquid detergent and water only. Squeeze dry in a clean cloth.

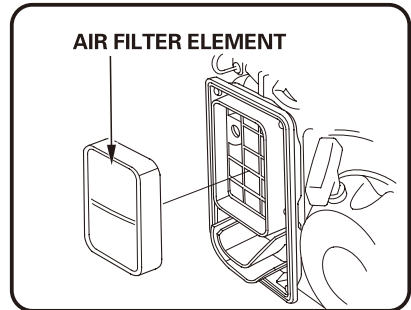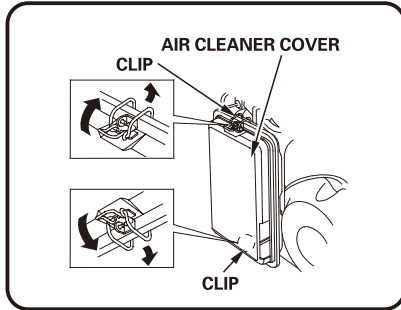

(b) Saturate foam air filter element with clean engine oil and squeeze in a clean cloth to remove excess oil.

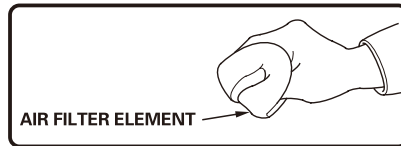


(c) Reinstall clean or new air filter element.

Spark Plug Maintenance

Changing the spark plug will help your engine start easier and run at peak performance.

(a) Remove the spark plug boot.


(b) Remove spark plug using provided wrench.

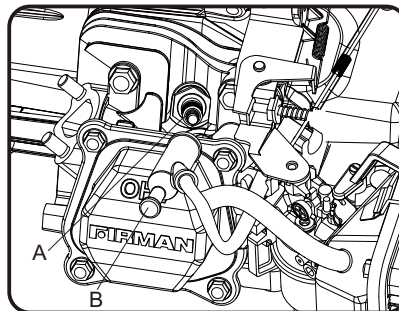


A- Spark plug
B- Spark plug boot

Maintenance - Storage

- (c) Inspect spark plug for damage and clean with a wire brush before reinstalling. Replace if damaged.
- (d-1) For spark plug FIRMEN P/N 330723001 - Adjust the electrode gap to 0.020 - 0.024 in. (0.5 - 0.6 mm).
- (d-2) For spark plug CHAMPION N9YC - Adjust the electrode gap to 0.028 - 0.031 in. (0.7 - 0.8 mm).
- (e) Seat spark plug in position and thread by hand to prevent cross threading.
- (f) Tighten plug with provided wrench and put the spark plug boot back on spark plug.

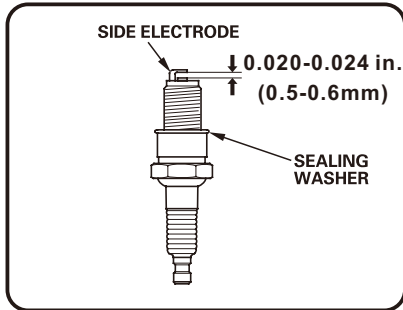

SPARK PLUG: FIRMEN P/N 330723001

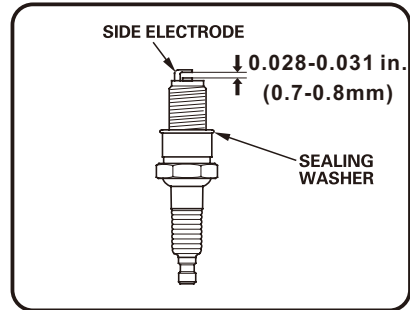

SPARK PLUG: CHAMPION N9YC

SPARK PLUG: FIRMEN P/N 330723001 or CHAMPION N9YC

Maintenance Valve Clearance

Intake: 0.005 - 0.007 in. (0.13 - 0.17 mm)

Exhaust: 0.007 - 0.009 in. (0.18 - 0.22 mm)

Muffler and Spark Arrester




WARNING! Contact with muffler area could cause burns resulting in serious injury.


- Do not touch hot parts.
- It is a violation of California Public Resource Code, Section 4442, to use or operate the engine on any forest-covered, brush-covered, or grass-covered land unless the exhaust system is equipped with a spark arrester, as defined in Section 4442, maintained in effective working order. Other states or federal jurisdictions may have similar laws, reference Federal Regulation 36 CFR Part 261.52.

Inspect Muffler and Spark Arrester


1. Inspect the muffler for cracks, corrosion, or other damage.
2. Loosen the bolt from muffler cover.

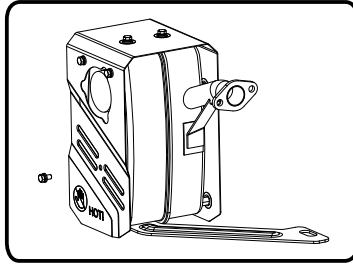

3. Remove the screws securing the spark arrester in place and then remove it from the muffler.

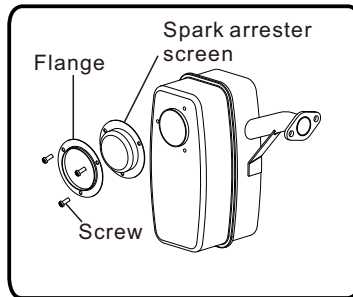

4. Carefully remove the carbon deposits from the spark arrester screen with a wire brush.

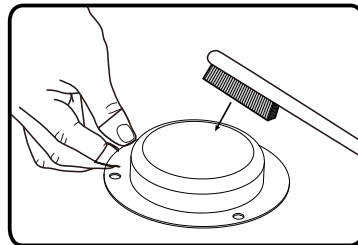

5. Replace the spark arrester if it is damaged. If replacement parts are required, make sure to use only FIRMEN original equipment replacement parts.
 6. Position the spark arrester on the muffler and attach with the screws.
- NOTICE** Failure to clean or replace spark arrester may result in decreased engine performance.

GENERATOR MAINTENANCE

Run the generator at least 30 minutes every month.


Make certain that the portable generator is kept clean and dry.

Do not expose the unit to excessive dust, dirt, moisture or corrosive vapors.

Do not insert any objects through cooling slots.

Before each use inspect underneath the generator for signs of oil or fuel. Clean any accumulated debris. Keep area around muffler free from any debris. Use a soft bristle brush to remove dirt or caked on oil. Use a damp cloth to clean all exterior surfaces.

Battery Replacement

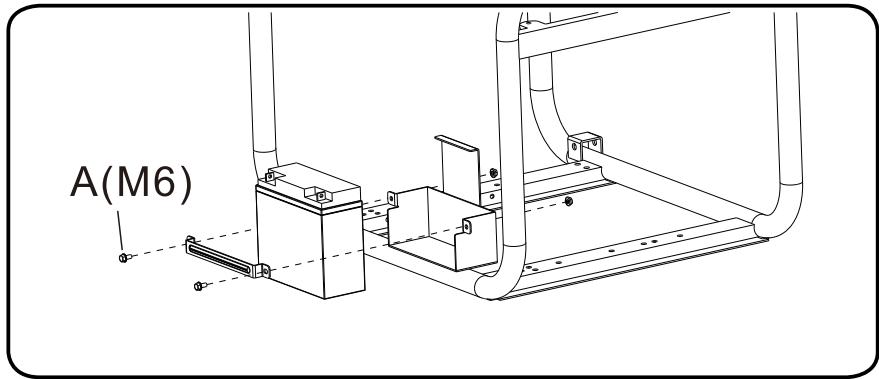

1. Remove the spark plug boot from spark plug.
2. Remove the nut and bolt from the negative(-) post first, then the positive(+) post.
3. Loosen and remove the fasteners(A) on the battery holding bracket.
4. Remove the battery and recycle.
5. Install the new battery with the following specification:
12V sealed lead acid 14AH
LXWXH:7.09X2.95X6.5inch(180X75X165mm)
6. Connect the red positive (+) battery cable to the battery first.
7. Connect the black negative (-) battery cable to the battery second.
8. Cover the posts with boots provided.
9. Install the spark plug boot onto spark plug.

Battery Charging

The battery powers the starter motor and control module. This portable generator is equipped with an automatic battery charging circuit. The battery will receive charging voltage only when the engine is running. The battery will maintain a proper charge if the portable generator is used on a regular basis (about once every two weeks). If it is used less frequently, the battery should be connected to a trickle charger (not included) or battery maintainer (not included) to keep the battery properly charged. If the battery is not able to start the engine, it can be started manually only in the GAS position by pulling the engine recoil cord. If the battery voltage is extremely low, the charging circuit may not be able to re-charge the battery. In this case, the battery must be connected to a standard automotive style battery charger for re-charging before it can be used.

Long Term Storage

It is important to prevent gum deposits from forming in essential fuel system components such as the carburetor, fuel hoses or tank during storage. Ethanol-blended fuels (called gasohol, ethanol or methanol) attract moisture, which leads to separation and formation of acids during storage. Acidic gas can damage the fuel system of an engine while in storage.



When the generator set is being stored for more than one month, follow these instructions to avoid engine problems:



WARNING! Fuel and its vapors are extremely flammable which could cause burns or fire resulting in death or serious injury.

Do not store fuel near any ignition sources.

When draining fuel move generator outdoors and use a commercially available non-conductive vacuum siphon. Fuel must be drained into an approved container.

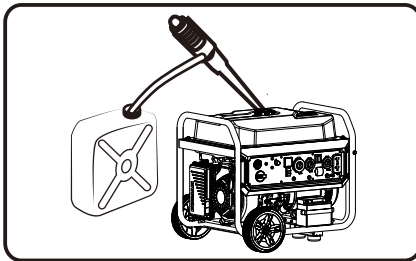

1. Add a properly formulated fuel stabilizer to the gasoline tank.
2. Start the generator as instructed in Starting the Generator section.
3. Run the generator for 5-10 minutes so the treated gasoline cycles through the fuel system.
4. Turn the main fuel selector switch to the "STORAGE OFF" position until the engine stops. This may take 3-5 minutes. Then turn the fuel selector switch to "OFF(O)" position.
5. Change oil after the engine cools down entirely.
6. Remove spark plug and pour about one teaspoon of engine oil into the cylinder.
7. Pull the starter cord a few times to lubricate the cylinder and then reinstall the spark plug.
8. Cover and store the unit in a clean, dry place out of direct sunlight.

NOTICE Any damage or hazards caused by using improper fuel, improperly stored fuel, and/or improperly formulated stabilizers, are not covered by manufacturer's warranty.

Do not store gasoline from one season to another season.

Troubleshooting - Specifications

Problem	Cause	Correction
Engine is running, but no AC output is available.	1. Circuit breaker is open. 2. Fault in generator. 3. Poor connection or defective cord set. 4. Connected device is bad.	1. Reset circuit breaker. 2. Contact authorized service facility. 3. Check and repair. 4. Connect another device that is in good condition.
Engine runs good at no-load but "bogs down" when loads are connected.	1. Short circuit in a connected load. 2. Engine speed is too slow. 3. Shorted generator circuit. 4. Clogged or dirty fuel filter.	1. Disconnect shorted electrical load. 2. Contact authorized service facility. 3. Contact authorized service facility. 4. Clean or replace fuel filter.
Engine will not start; starts and runs rough or shuts down when running.	1. Fuel selector switch set to OFF (O) position. 2. The indicator light is OFF or flashing red. 3. Low oil level. 4. Dirty air cleaner. 5. Out of gasoline. 6. Stale gasoline. 7. Spark plug wire not connected to spark plug. 8. Bad spark plug. 9. Water in gasoline. 10. Flooded. 11. Excessively rich fuel mixture. 12. Clogged or dirty fuel filter. 13. Starting battery may have insufficient charge. 14. Out of LPG/NG. 15. LPG cylinder knob / NG supply valve is not open. 16. Out of battery power.	1. Set fuel selector switch to "GAS" or "LPG/NG" position. 2. Must have solid red indicator light to be able to start the engine. 3. Fill crankcase to proper level or place generator on level surface. 4. Clean or replace air cleaner. 5. Fill fuel tank with gasoline. 6. Drain fuel tank and carburetor; fill with fresh gasoline. 7. Connect wire to spark plug. 8. Replace spark plug. 9. Drain gas tank and carburetor; fill with fresh gasoline. 10. Wait 5 minutes and re-crank engine. 11. Contact authorized service facility. 12. Clean or replace fuel filter. 13. Check battery output and charge battery as necessary. 14. Replace LPG cylinder/ check NG supply. 15. Fully open LPG cylinder knob / NG supply valve. 16. Start Engine in "GAS" position. Charge or replace battery.
Engine lacks power.	1. Load is too high. 2. Dirty air filter. 3. Clogged or dirty fuel filter. 4. Clogged spark arrester.	1. Don't Overload Generator 2. Replace air filter. 3. Clean or replace fuel filter. 4. Clean or replace spark arrester.
Engine "hunts" or falters.	1. Carburetor is running too rich or too lean. 2. Clogged or dirty fuel filter.	1. Contact authorized service facility. 2. Clean or replace fuel filter.
Engine shuts down when running.	1. Out of gasoline or LPG/NG. 2. Dirty air cleaner. 3. Low oil level.	1. Fill fuel tank with gasoline or replace LPG cylinder / check NG supply. 2. Clean or replace air cleaner. 3. Fill crankcase to proper level or place generator on level surface.
Engine shuts down and yellow CO fault light blinking.	1. CO system fault	1. Contact authorized FIRMAN service facility.


For all other issues, contact authorized dealer or Firman customer service.

SPECIFICATIONS


Model	T11671		
Starting Watts	11600(GASOLINE)/10400(LPG)/8650(NG)		
Running Watts*	9300(GASOLINE)/8300(LPG)/6900(NG)		
Rated AC Voltage	120/240V		
Rated Frequency	60Hz		
Phase	Single		
Voltage Regulator	AVR		
Power Factor	1		
Alternator Type	Brushed		
Engine	FIRMAN		
Engine Type	Single Cylinder, 4-Stroke OHV Air Cooled		
Displacement	459cc		
Low Oil Shutdown	Yes		
Ignition System	Breakless Ignition Type, Flywheel Magneto		
Starting System	Recoil/Electric Start		
Fuel	Unleaded Automotive Gasoline/LPG/NG		
Capacity Fuel Tank	9.0 U.S. Gallons (34L)		
Lubricating Oil Capacity	40.6 oz (1.2L)		
Carburetor Type	Float		
Air Cleaner	Polyurethane Type		
P.T.O. Shaft Rotation	Counter Clockwise (Facing P.T.O.)		
Oil Type	See "Add Engine Oil" Section		
AC Grounding System	Neutral Bonded To Frame		
Natural gas fuel pressure range	7-11 inches water column (0.25-0.40 psi)(13-20mm mercury)(1.7-2.7 kpa)		
Natural gas fuel consumption	No Load	Half Load	Full Load
	72ft ³ /hr(2m ³ /hr) 72,000 BTU/h (21,101 W)	86ft ³ /hr(2.4m ³ /hr) 86,000 BTU/h (25,204 W)	126.7ft ³ /hr(3.5m ³ /hr) 126,700 BTU/h (37,126 W)
LPG fuel consumption	15.6ft ³ /hr(1.6L/hr) 39,000 BTU/h (11,429 W)	31ft ³ /hr(3.2L/hr) 77,500 BTU/h (22,713 W)	62.7ft ³ /hr(6.5L/hr) 156,163 BTU/h (45,757 W)

*Generator certified in accordance with CSA (Canadian Standards Association) standard C22.2No. 100-14, Motors and Generators and complies with PGMA (Portable Generator Manufacturers' Association) standard ANSI/PGMA G300-2023, Safety and Performance of Portable Generators.

PARTS DIAGRAM AND PART LIST
T11671 PARTS DIAGRAM

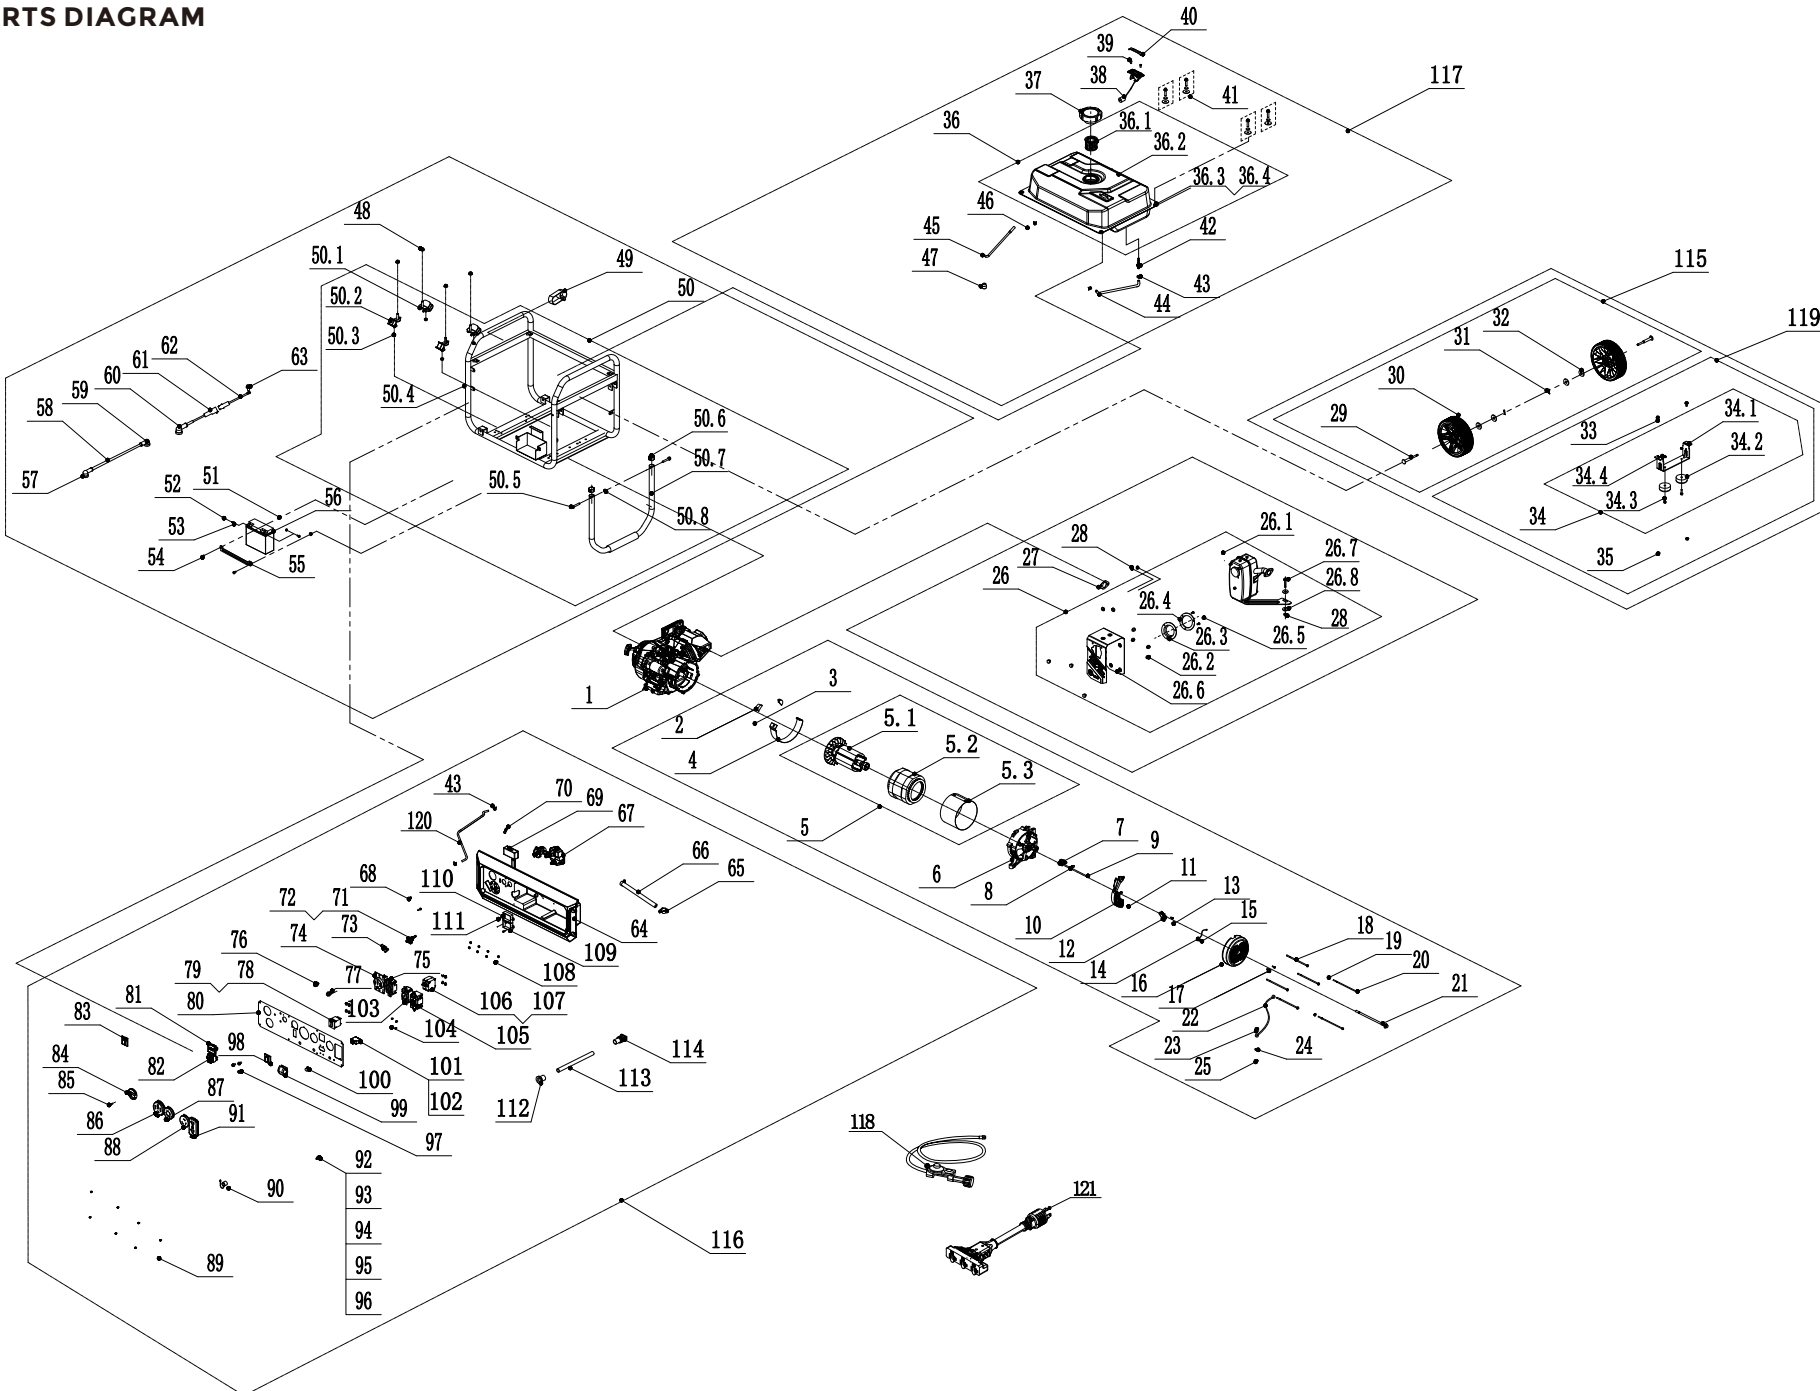

459cc TRI-FUEL ENGINE PARTS DIAGRAM

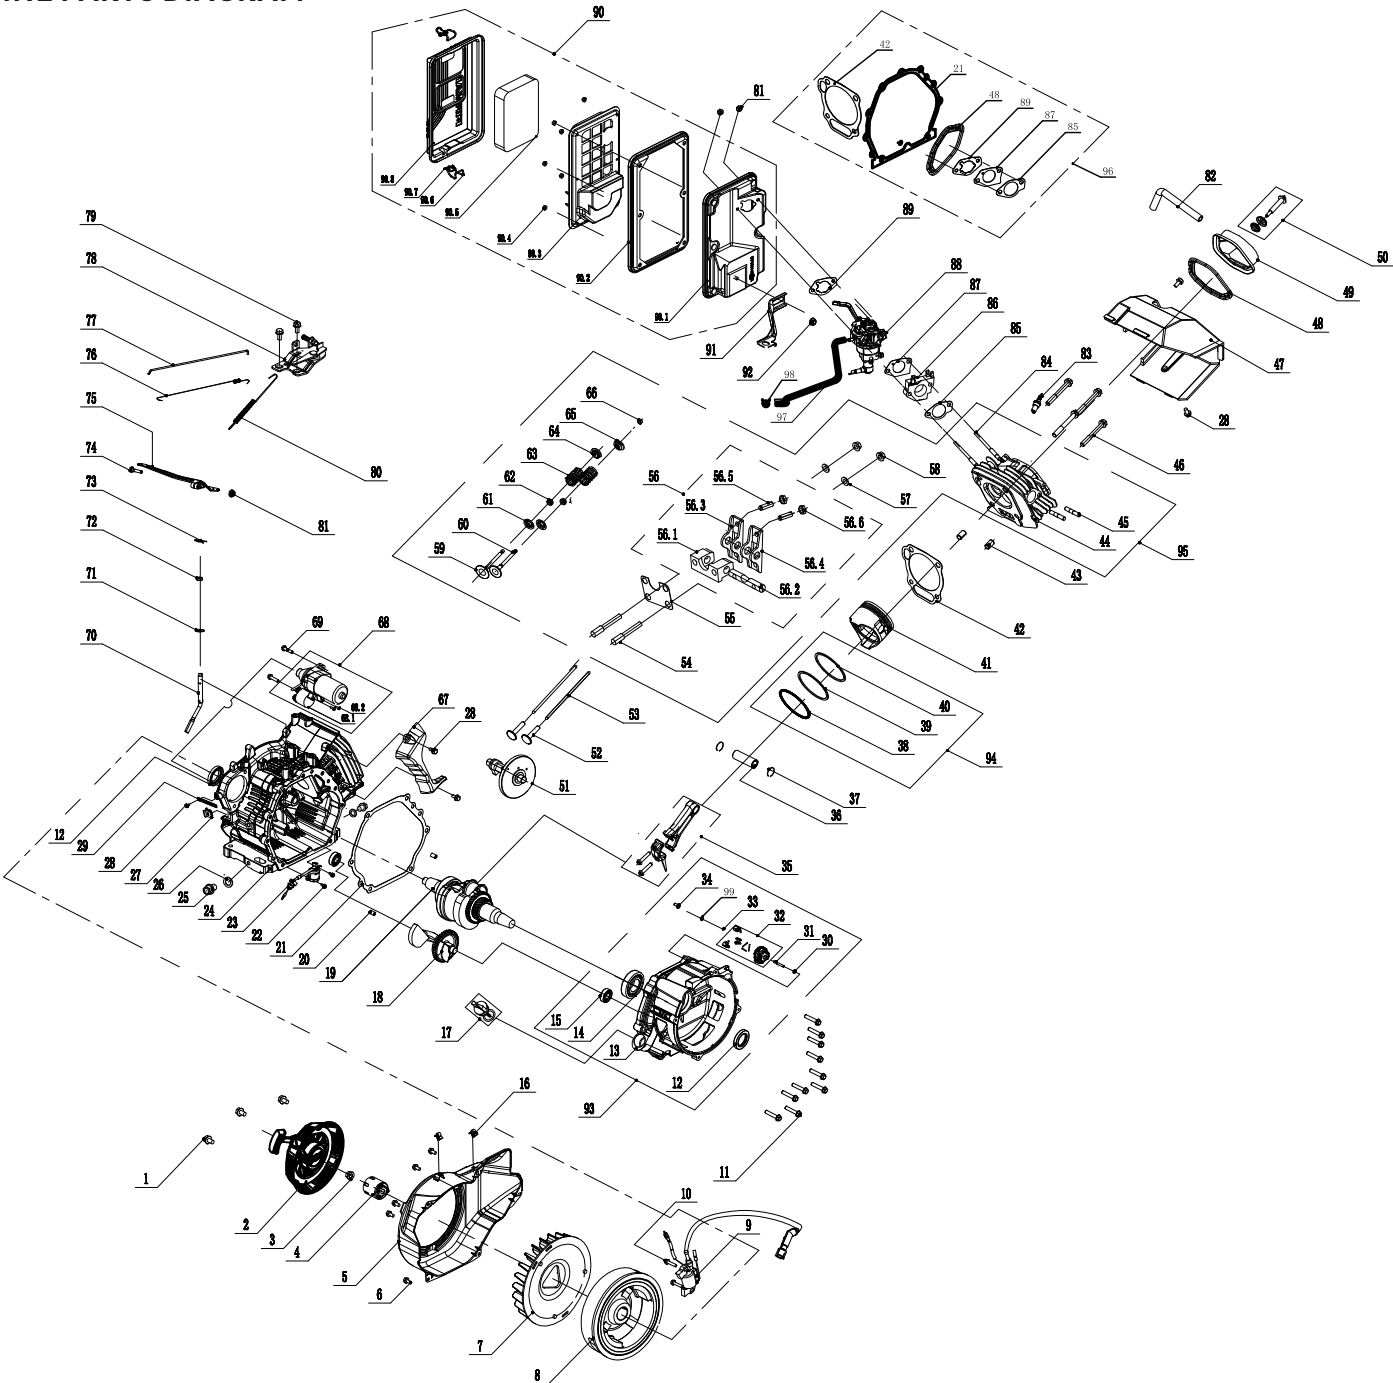

Parts Diagrams - Parts Lists - Wiring Diagram

T11671 Portable Generator

NO.	P/N	Description	QTY.	NO.	P/N	Description	QTY.
1	393467011	Engine	1	36.2	393417028	Flange Bolt M6 x 25	1
2	357713501	Rubber Cap B	2	36.3	336713542	Grommet, Fuel Tank	4
3	336718308	Flange Bolt M6 x 8	1	36.4	357713600	Bushing	4
4	357713573	Wind Shield	1	37	392713002	Fuel Cap	1
5	393453008	Rotor And Stator Set	1	38	392723003	Fuel Gauge Assy.	1
5.1	393753001	Rotor	1	39	336417031	Screw M5 x 16	2
5.2	393753002	Stator	1	40	399715513	Fuel Gauge Display	1
5.3	380713537	Stator Cover	1	41	310715064	Bolt M6 x 20	4
6	357713506	End Cover	1	42	336713807	Tank Fitting With Filter	1
7	357713507	Carbon Brush Assy.	1	43	330713508	Clip Ø10.5 x 8	4
8	336713525	Carbon Brush Holder	1	44	336427010	Fuel Hose 1	1
9	357713563	Bolt & Washer Assy. M5 x 20	1	45	357713525	Formed Vapor Hose	1
10	380713504	AVR	1	46	317713553	Clamp Ø8 x 6	1
11	336713519	Flange Bolt M5 x 16	2	47	393717006	Throttle Valve	1
12	336713523	Terminal Block	1	48	357713531	Nut M10	4
13	336713520	Bolt & Washer Assy. M5 x 16	2	49	336713691	Hose Holder	1
14	357713599	Ground Wire	1	50	393417029	Frame Assy.	1
15	336713519	Flange Bolt M5 x 16	1	50.1	357713532	Isolator II	2
16	392715509	End Cover Cap	1	50.2	357713533	Isolator I	2
17	336718309	Flange Bolt M5 x 12	2	50.3	336718318	Nut M8	4
18	375715029	Flange Bolt M6 x 200	4	50.4	393417030	Isolator II	1
19	330713610	Nut M5	2	50.5	393717007	Bolt M8 x 80	2
20	393713048	Side Cover Bolt M5 x 236	2	50.6	375725506	Handle Plastic Washer	2
21	375715030	Flange Bolt M10 x 285	1	50.7	393417031	Screw & Washer Assy. M5 x 10	1
22	336713514	Ground Wire	1	50.8	340715048	Nut M8	2
23	336718301	Flange Bolt M6 x 12	1	51	375715016	Nut M6	2
24	336713516	External Teeth Lock Washer Ø6	1	52	393728308	Flange Nut M5	2
25	336718326	Nut M6	1	53	357713569	Screw & Washer Assy. M5 x 10	2
26	393417021	Muffler Assy.	1	54	329713551	Flange Bolt M6 x 15	2
26.1	393417022	Muffler	1	55	336713645	Bracket, Battery	1
26.2	393717008	Flange Bolt M6 x 12	9	56	393457010	Battery, 12V, 14Ah	1
26.3	393713025	Arrester, Spark	1	57	357713570	Boot, Red Battery	1
26.4	393713026	Holder, Spark Arrester	1	58	392715520	Battery, Cable, Positive	1
26.5	380713549	Screw & Washer Assy. M5 x 14	3	59	336713611	Boot, Rubber Battery	1
26.6	393417023	Muffler Cover	1	60	357713571	Boot, Black Battery	1
27	393723013	Gasket, Muffler	1	61	336713693	Battery Cable, Negative, Female, 180mm	1
28	336718315	Nut M8	2	62	336713692	Battery Cable, Negative, Male, 120mm	1
29	393417024	Wheel Assy.	2	63	336718308	Flange Bolt M6 x 8	1
30	393427009	Wheel	2	64	393427010	Control Box	1
31	357713536	Cotter Pin	2	65	380713547	Metal Clamp Ø25	2
32	336717017	Flat Washer Ø10	4	66	399725527	LPG Hose	1
33	336713559	Flange Bolt M8 x 16	2	67	393417032	Main Regulator Assy.	1
34	393417025	Support Leg Sub Assy.	1	68	399715591	Tapping Screw ST2.9 x 16	2
34.1	393417026	Support Leg	1	69	332753001	CO Module	1
34.2	336713557	Rubber Support	2	70	393727005	Fuel Switch Cover	1
34.3	336713561	Flange Bolt M6 x 25	2	71	355418316	Fuel Valve	1
34.4	336718315	Nut M8	2	72	393717002	Screw & Washer Assy. M5 x 35	2
35	375715016	Nut M6	2	73	336713822	Micro Switch 2	1
36	393417027	Fuel Tank Assy.	1	74	380713518	Receptacle, 14-50R	1
36.1	336713548	Fuel Filter, Wire Mesh	1	75	336713601	Receptacle, L14-30R	1

Parts Diagrams - Parts Lists - Wiring Diagram

NO.	P/N	Description	QTY.	NO.	P/N	Description	QTY.
76	336755002	CO Indicator Light	1				
77	336713828	Indicator Light	1				
78	380713526	Circuit Breaker, 30A, Double-Pole	1				
79	336713569	Screw & Washer Assy. M4 x 8	4				
80	393417033	Control Panel Plate	1				
81	363753004	Multimeter	1				
82	399755662	Switch, Electric Start	1				
83	340725503	Switch Cover	1				
84	393727006	Fuel Switch	1				
85	317713516	Screw & Washer Assy. M4 x 14	1				
86	399427010	Receptacle Cover, 14-50R	1				
87	360725501	Receptacle Cover, L14-30R	1				
88	336725506	Receptacle Cover, L5-30R	1				
89	336718383	Screw & Washer Assy. M4 x 14	8				
90	393727002	Cover, LPG Inlet	1				
91	360725502	Receptacle Cover, 5-20R GFCI	1				
92	357713542	Flange Bolt M6 x 22	1				
93	380713515	Nut M6	2				
94	336713512	Lock Washer Ø6	2				
95	336713513	Flat Washer Ø6	2				
96	336713516	External Teeth Lock Washer Ø6	1				
97	329713551	Flange Bolt M6 x 15	3				
98	393725501	Cover, 30A, Circuit Breaker	1				
99	392758302	Cover, Double-Pole Circuit Breaker	1				
100	336755005	Cover, 20A Push Button Circuit Breaker	1				
101	336713585	Circuit Breaker, Push Button, 20A	1				
102	336457020	Nut M11 x 1	1				
103	317713580	Receptacle, L5-30R	1				
104	336718368	Screw & Washer Assy. M3 x 6	4				
105	357713547	Receptacle, 5-20R Duplex GFCI	1				
106	393455001	Circuit Breaker, Double-Pole, 38.8A	1				
107	330723586	Screw/Washer Assy. M5 x 8	4				
108	336718324	Nut M4	8				
109	336713818	Charging Module	1				
110	393457011	Control Module	1				
111	317713521	Screw ST4.8 x 17	5				
112	357713545	Grommet	1				
113	357713546	Sleeve	1				
114	357713548	Grommet	1				
115	393417034	Wheel Assy.	1				
116	393417035	Control Panel Assy.	1				
117	393417036	Fuel Tank Assy.	1				
118	336713834	LPG Regulator/Hose Assy.	1				
119	393417037	Support Leg Assy.	1				
120	336427011	Fuel Hose 2	1				
121	366755002	Power Cord	1				


Parts Diagrams - Parts Lists - Wiring Diagram

FIRMAN 459cc Tri-fuel Engine

NO.	Part Number	Description	Qty.
1	336718308	Flange Bolt M6 x 8	3
2	380467017	Recoil Assy.	1
3	357723571	Nut M16	1
4	357723572	Pulley, Starter	1
5	392715500	Fan Cover	1
6	336718302	Flange Bolt M6 x 12	5
7	380723511	Cooling Fan	1
8	380418300	Flywheel	1
9	380418301	Ignition Coil	1
10	336718311	Flange Bolt M6 x 29	2
11	357723516	Flange Bolt M8 x 40	10
12	357723515	Seal, Oil	2
13	393713011	Crankcase Cover	1
14	392467003	Radial Ball Bearing 6207/C3	1
15	357723505	Radial Ball Bearing 6202/P6	2
16	375718321	Wire Clip	2
17	393723009	Dipstick, Oil	1
18	357723507	Balance Shaft	1
19	392715501	Crankshaft	1
20	317723516	Dowel Pin 8 x 14	2
21	393723008	Gasket, Crankcase	1
22	336723526	Flange Bolt M6 x 15	2
23	355728351	Sensor, Engine Oil	1
24	393713010	Crankcase Assy.	1
25	380717007	Drain Plug M12 x 1.25 x 15	2
26	357723502	Oil Drain Bolt Washer 12 x 20 x 2	2
27	336728303	Sheath, Wire	1
28	336718301	Flange Bolt M6 x 12	5
29	317713577	Clip	1
30	336723595	Inner Washer, Gear	1
31	357723586	Governor Gear Shaft	1
32	357723585	Gear, Governor	1
33	336723597	Clip, Governor Gear	1
34	357723584	Bushing, Governor Gear	1
35	357723517	Rod, Connecting	1
36	393713039	Piston Pin	1
37	357723518	Piston Pin Retainer Ring	2
38	393713012	Ring, Oil	1
39	393713013	Ring, Second Piston	1
40	393713014	Ring, First Piston	1
41	393713038	Piston	1
42	392723001	Gasket, Cylinder Head	1
43	357723544	Dowel Pins Ø12 x 20	2
44	375717007	Cylinder Head	1
45	336723539	Exhaust Valve Stud Bolt M8 x 35	2
46	355718346	Bolt M10 x 1.25 x 80	4
47	393723011	Upper Hood Assy.	1
48	357723525	Gasket, OHV	1
49	393413023	Cover, OHV	1
50	393413024	Bolt, OHV	1
51	393413005	Camshaft	1
52	393713015	Valve Lifter	2
53	360715539	Push Rod	2
54	360715541	Pivot Bolt	2
55	360715540	Push Rod Guide Plate	1
56	393413006	Rocker Components	2
56.1	393718303	Rocker Seat	1
56.2	393718304	Rocker Shaft	1
56.3	393718305	Rocker, Intake Valve	1
56.4	393718306	Rocker, Exhaust Valve	1
56.5	393718307	Adjusting Stud	2
56.6	336723528	Lock Nut	2

[illegible]

Wiring Diagram

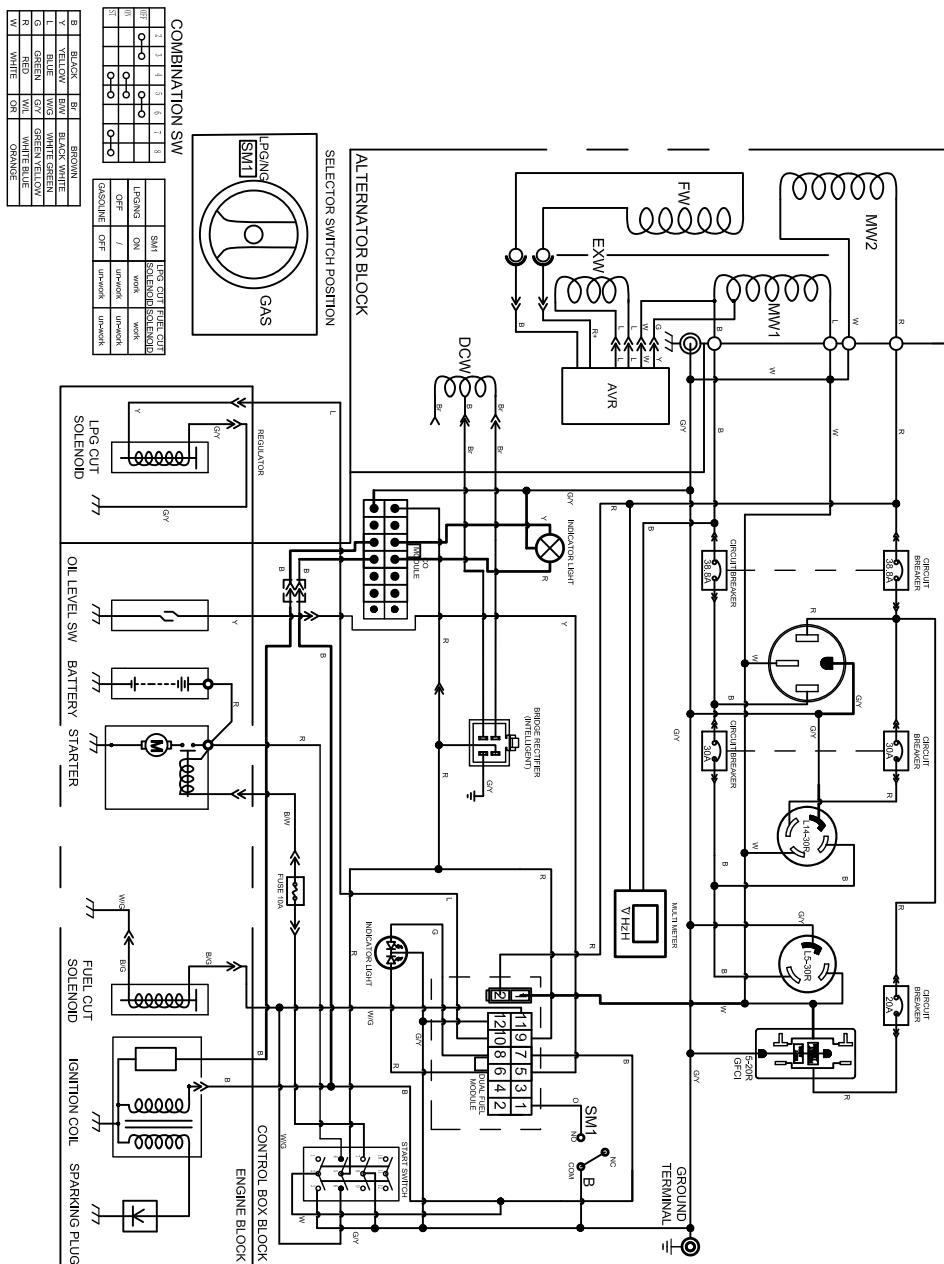

Service - Warranty

For service information contact FIRMAN customer service at 1-844-347-6261 or at www.firmanpowerequipment.com to obtain warranty service information or to order replacement parts or accessories.

HOW TO ORDER REPLACEMENT PARTS

Even quality-built equipment such as this electric generator may need occasional replacement parts to maintain it in good condition over the years. To order replacement parts, please give the following information:

- Model No. Rev. Level and Serial No. found on the Data Decal.
- Parts number or numbers as shown in the Parts List section.
- A brief description of the trouble with the generator.

FIRMAN 4 Years Limited Warranty

Warranty Qualifications

Register your product using the QR code provided or at www.firmanpowerequipment.com. FIRMAN will also register the warranty upon receipt of your Warranty Registration Card and a copy of your sales receipt from one of FIRMAN's retail locations as proof of purchase. Please submit your warranty registration and your proof of purchase within ten(10) days of the date of purchase.



Repair/Replacement Warranty

FIRMAN warrants to the original purchaser that the mechanical and electrical components will be free of defects in material and workmanship for a period of one (1) year (parts and labor) and 4 years (parts and technical support) from the original date of purchase 90 days [parts and labor] and 180 days [parts] for commercial & industrial use. Transportation charges on product submitted for repair or replacement under this warranty are the sole responsibility of the purchaser. This warranty only applies to the original purchaser and is not transferable.

Do Not Return the Unit to the Place of Purchase

Contact the FIRMAN customer service and FIRMAN will troubleshoot any issue via phone or e-mail. If the problem is not corrected by this method, FIRMAN will, at its option, authorize evaluation, repair or replacement of the defective part or component at a FIRMAN Service Center. FIRMAN will provide you with a case number for warranty service. Please keep it for future reference. Repairs or replacements without prior authorization, or at an unauthorized repair facility, will not be covered by this warranty.

Warranty Exclusions

This warranty does not cover the following repairs and equipment.

Normal Wear

Your product needs periodic parts and service to perform well. This warranty does not cover repair when normal use has exhausted the life of a part or the equipment as a whole.

Installation, Use and Maintenance

This warranty will not apply to parts and/or labor if your product is deemed to have been misused, neglected, involved in an accident, abused, loaded beyond the generator's limits, modified, installed improperly or connected incorrectly to any electrical component. Normal maintenance is not covered by this warranty.

Other Exclusions

This warranty excludes:

- cosmetic defects such as paint, decals, etc.
- wear items
- accessory parts
- failures due to acts of God and other force majeure events beyond the manufacturer's control
- problems caused by parts that are not original FIRMAN parts
- units used for prime power in place of existing utility power where utility is present or in place of utility power where utility power service does not normally exist.

Limits of Implied Warranty and Consequential Damage

FIRMAN disclaims any obligation to cover any loss of time, use of this product, freight, or any incidental or consequential claim by anyone from using this product. THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

A unit provided as an exchange will be subject to the warranty of the original unit. The length of the warranty governing the exchanged unit will remain calculated by reference to the purchase date of the original unit.

This warranty gives you certain legal rights which may change from state to state. Your state may also have other rights you may be entitled to that are not listed within this warranty.

Contact Information

You may contact FIRMAN at:

Address

Firman Power Equipment Inc.

Attn: Customer Service

8644 W. Ludlow Dr.

Peoria, AZ 85381

www.firmanpowerequipment.com

We are FIRMAN POWER - And we are here for you.

FIRMAN POWER EQUIPMENT INC. EMISSION CONTROL WARRANTY STATEMENT

YOUR WARRANTY RIGHTS AND OBLIGATIONS

The United States Environmental Protection Agency (EPA) and FIRMAN POWER EQUIPMENT INC. (FIRMAN) are pleased to explain the emission control system warranty on your [2026-2027] model year small off-road engine/equipment. In the United States, new small off-road engine/equipment must be designed, built and equipped to meet the State's stringent anti smog standards. FIRMAN must warrant the emission control system on your small off-road engine/equipment for the period listed below provided there has been no abuse, neglect or improper maintenance of your small off-road engine/equipment leading to the failure of the emission control system. Your emissions control system may include parts such as the carburetor or fuel-injection system, the ignition system, catalytic converter, fuel tanks, fuel lines (for liquid fuel and fuel vapors), fuel caps, valves, canisters, filters, clamps and other associated components. Also included may be hoses, belts, connectors, and other emission-related assemblies. Where a warrantable condition exists, FIRMAN will repair your small off-road engine/equipment at no cost to you including diagnosis, parts and labor.

MANUFACTURER'S WARRANTY COVERAGE:

This emission Control System is warranted for two years. If any emission-related part on your engine/equipment is defective, the part will be repaired or replaced by FIRMAN.

OWNER'S WARRANTY RESPONSIBILITIES:

As the small off-road engine/equipment owner, you are responsible for the performance of the required maintenance listed in your owner's manual. FIRMAN recommends that you retain all receipts covering maintenance on your small off-road engine/equipment, but FIRMAN cannot deny warranty coverage solely for the lack of receipts or for your failure to ensure the performance of all scheduled maintenance. As the small off-road engine/equipment owner, you should however be aware that FIRMAN may deny you warranty coverage if your small off-road engine/equipment or a part has failed due to abuse, neglect, improper maintenance or unapproved modifications. You are responsible for presenting your small off-road engine/equipment to FIRMAN distribution center as soon as a problem exists. The warranty repairs shall be completed in a reasonable amount of time, not to exceed 30 days. If you have any questions regarding your warranty rights and responsibilities, you should contact FIRMAN at 1-844-347-6261 or www.firmanpowerequipment.com.

DEFECTS WARRANTY REQUIREMENTS:

- (a) The warranty period begins on the date the engine/equipment is delivered to an ultimate purchaser.
- (b) General Emissions Warranty Coverage. FIRMAN warrants to the ultimate purchaser and each subsequent owner that the engine/equipment is:
 - (1) Designed, built, and equipped so as to conform with all applicable regulations adopted by the Environmental Protection Agency; and
 - (2) Free from defects in materials and workmanship that causes the failure of a warranted part for a period of two years.
- (c) The warranty on emissions-related parts will be interpreted as follows:
 - (1) Any warranted part that is not scheduled for replacement as required maintenance in the written instructions required by subsection (d) must be warranted for the warranty period defined in Subsection (b)(2). If any such part fails during the period of warranty coverage, it must be repaired or replaced by FIRMAN according to Subsection (4) below. Any such part repaired or replaced under the warranty must be warranted for the remaining warranty period.
 - (2) Any warranted part that is scheduled only for regular inspection in the written instructions required by subsection (d) must be warranted for the warranty period defined in Subsection (b)(2). A statement in such written instructions to the effect of "repair or replace as necessary" will not reduce the period of warranty coverage. Any such part repaired or replaced under warranty must be warranted for the remaining warranty period.

(3) Any warranted part that is scheduled for replacement as required maintenance in the written instructions required by subsection (d) must be warranted for the period of time prior to the first scheduled replacement point for that part. If the part fails prior to the first scheduled replacement, the part must be repaired or replaced by FIRMÁN according to Subsection (4) below. Any such part repaired or replaced under warranty must be warranted for the remainder of the period prior to the first scheduled replacement point for the part.

(4) Repair or replacement of any warranted part under the warranty must be performed at no charge to the owner at a warranty station.

(5) Notwithstanding the provisions of Subsection (4) above, warranty services or repairs must be provided at all FIRMÁN distribution centers that are franchised to service the subject engine/equipment.

(6) The owner must not be charged for diagnostic labor that leads to the determination that a warranted part is in fact defective, provided that such diagnostic work is performed at a warranty station.

(7) FIRMÁN is liable for damages to other engine/equipment components proximately caused by a failure under warranty of any warranted part.

(8) Throughout the emissions warranty period defined in Subsection (b)(2), FIRMÁN must maintain a supply of warranted parts sufficient to meet the expected demand for such parts.

(9) Any replacement part may be used in the performance of any warranty maintenance or repairs and must be provided without charge to the owner. Such use will not reduce the warranty obligations of FIRMÁN.

(10) Add-on or modified parts that are not exempted by the Environmental Protection Agency may not be used. The use of any non-exempted add-on or modified parts will be grounds for disallowing a warranty claim. FIRMÁN will not be liable to warrant failures of warranted parts caused by the use of a non-exempted add-on or modified part.

(11) FIRMÁN issuing the warranty shall provide any documents that describe that manufacturer's warranty procedures or policies within five working days of request by the Environmental Protection Agency.

(d) Emission Warranty Parts List for exhaust (for all displacements).

1. Ignition system including:

- Spark plug
- Ignition coil

2. Fuel metering system:

- Fuel tank
- Fuel cap
- Fuel lines (for liquid fuel and fuel vapors) and related fittings/clamps
- Fuel regulator, carburetor and internal parts.

3. Catalytic muffler assembly including:

- Exhaust manifold
- Catalytic converter
- Muffler gasket
- pulse valve

4. Air induction system including:

- Intake pipe/manifold
- Air cleaner

5. Crankcase breather assembly including:

- Breather connection tube

6. Fuel tank evaporative emission control system including:

- Purge valves
- Carbon canister
- Vapor hoses and fitting/clamps

FIRMÁN will furnish with each new engine/equipment written instructions for the maintenance and use of the engine/equipment by the owner.

Limitations

This Emission Control System Warranty shall not cover any of the following:

(a) Consequential damages such as loss of time, inconvenience, loss of use of the engine or equipment, etc.

(b) Diagnosis and inspection fees that do not result in eligible warranty service being performed.

FOLLOW US ON SOCIAL

USE

#EVERYGENERATORTELLSASTORY

FOR YOUR CHANCE TO WIN FIRMAN SWAG



FIRMAN POWER EQUIPMENT INC.
8644 W. LUDLOW DR.
PEORIA, AZ 85381
1-844-347-6261
WWW.FIRMANPOWEREQUIPMENT.COM

All rights reserved. Any reprinting or unauthorized use without the written permission is expressly prohibited.
P/N:393735001 Rev:00