


4" 5CCT IN 1 LED Recessed Downlight

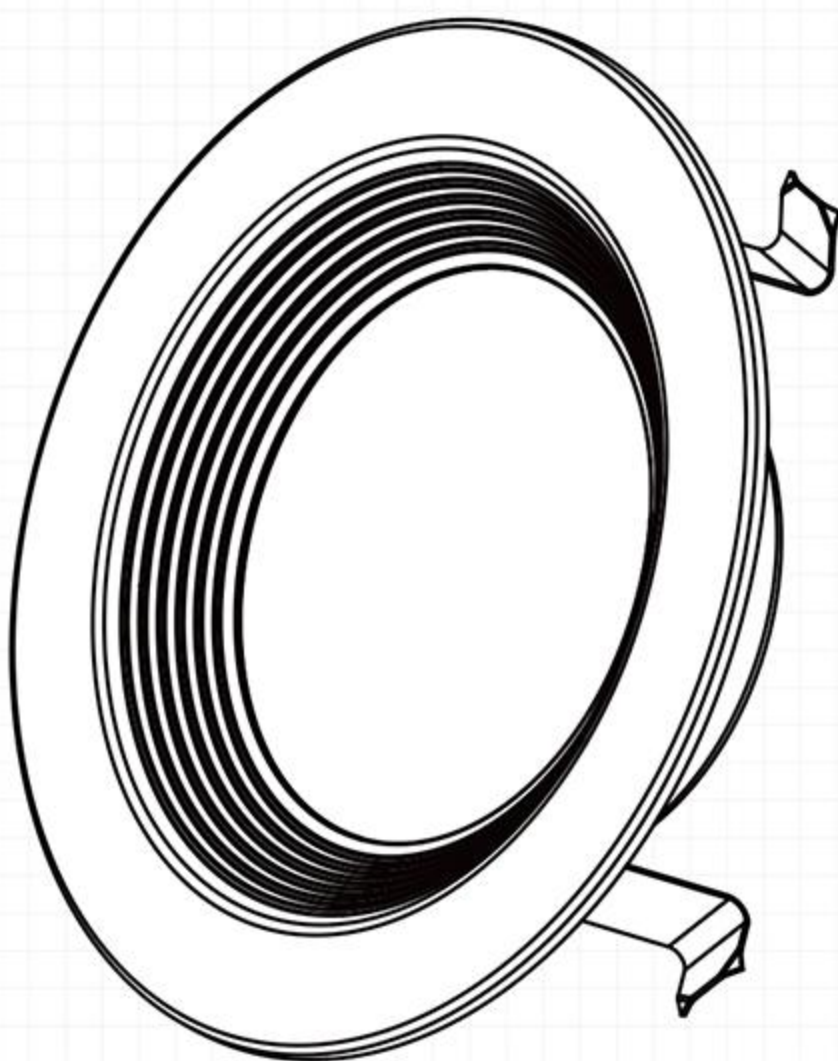

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders. Or you can send your inquiry to our Official Customer Support at:

 support@amicolight.com

 +1(888)-676-1042 Monday - Friday from 9:00AM - 5:00PM (PT)




SAFETY INFORMATION

WARNING

1. DANGER – Risk of shock– Disconnect power before installation.
2. “WARNING – Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.”
3. Suitable for damp locations. For indoor use only.
4. Suitable for Type IC or NON-IC Luminaires.
5. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
6. “WARNING – To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.”
7. WARNING: Not for emergency lighting.
8. Maximum 8 of 12 AWG through branch circuit conductor suitable for 75°C permitted in box.
9. “WARNING – Risk of fire or electric shock. Install this kit only in luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the retrofit kit does not exceed the input rating of the luminaire.”
10. “Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.”
11. “THE RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY CSA OR AUTHORITIES HAVING JURISDICTION”



HOW TO INSTALL

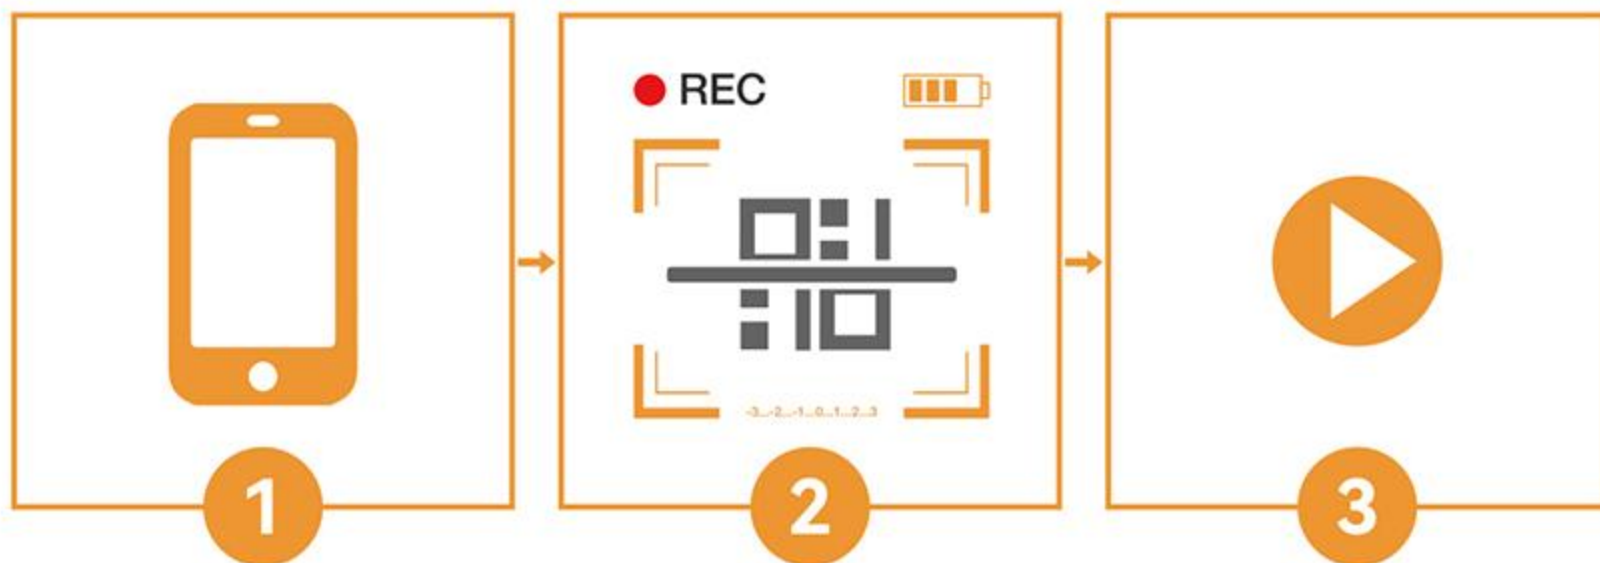


Need a Video Instruction Guide?
Please scan the QR code.


If the QR code is invalid, please contact us for the video.



HOW TO INSTALL

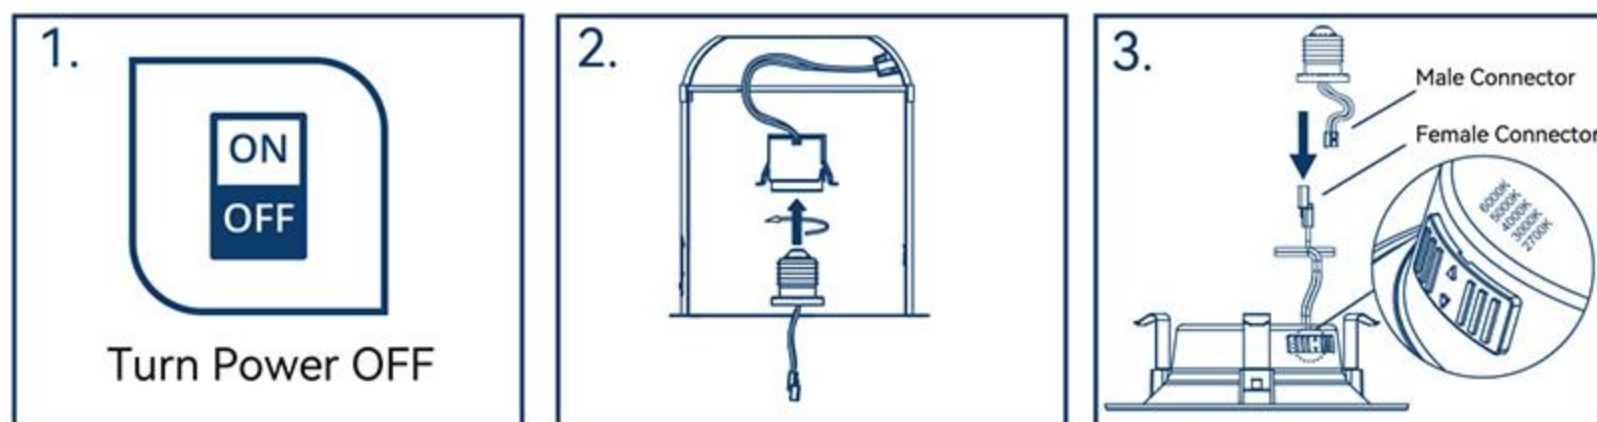

1. Turn off circuit breaker that provides power to the light switch for the recessed lights.
2. Thread the Socket Adapter into the socket.
3. The toggle switch to the specified color temperature.

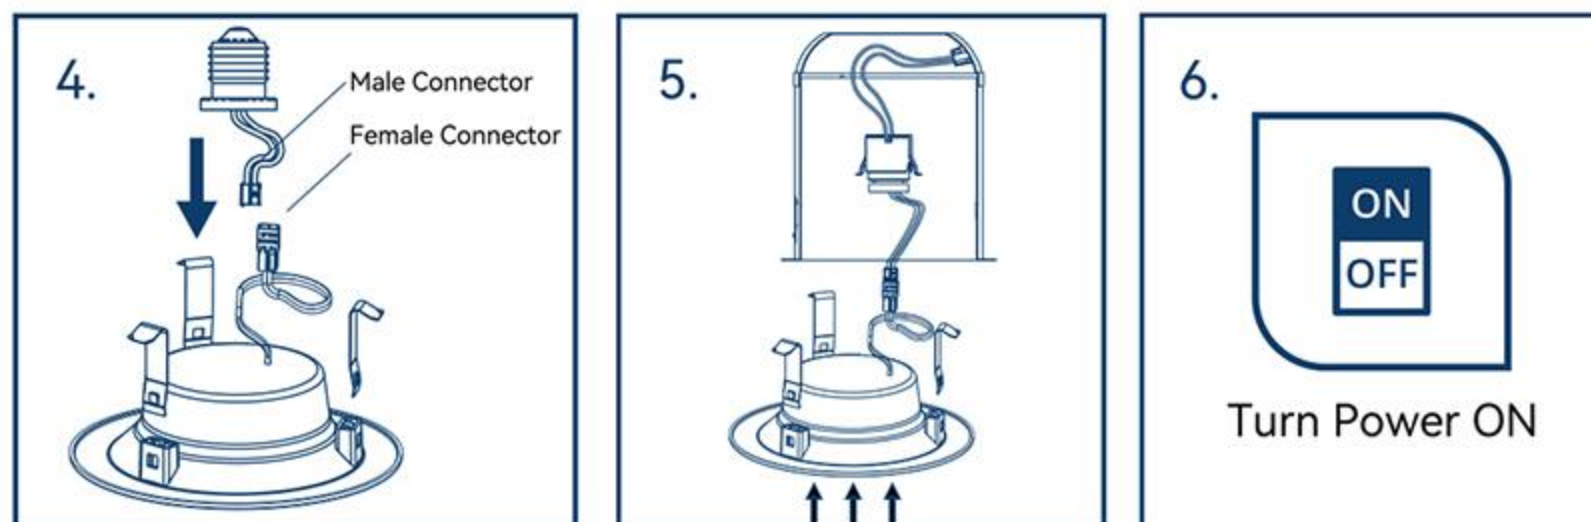


4. Plug the female connector of the retrofit trim onto the male connector of the housing.
5. Tuck all wires into the can and carefully push the retrofit trim into can.
(NOTE: to provide enough room in shallow cans carefully position SOCKET ADAPTER and SOCKET adjacent to the side of the LED DRIVER prior to inserting the RETROFIT TRIM into the CAN).
6. Turn on circuit breaker and test light.



PRODUCT FEATURES

SPECIFICATIONS

Voltage	120V
Wattage	8.5W
lumen	650LM
Suitable for Locations Ingress	Damp
Housing	PC
Warranty	5 years
Color temperature	2700/3000/4000/5000/6000K

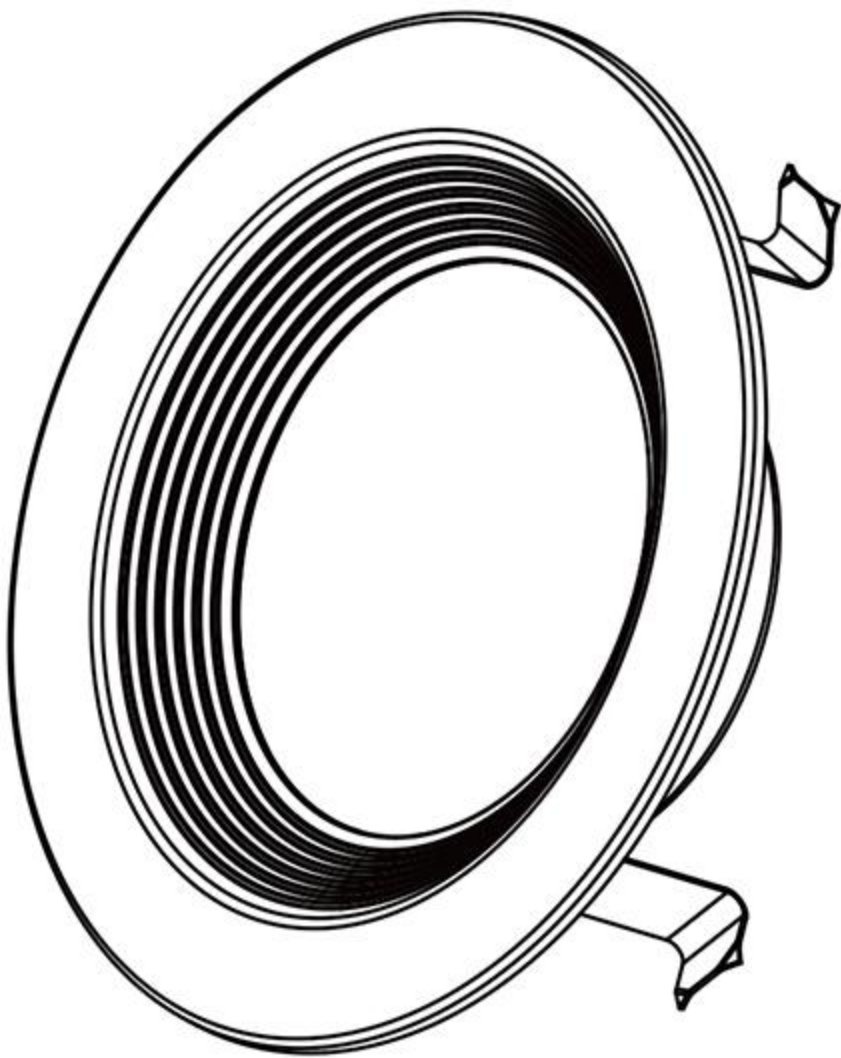



COMMON TROUBLESHOOTING

PROBLEMS and COUNTERMEASURES

PROBLEM	PROBABLE CAUSE	SOLUTION
Unlit	The wire falls off/loosens/breaks	Check that the wires are well connected
	The power switch is not turned on	Make sure the power switch is on
	The light holder in the UL cans is damaged	Check and replace with a new light holder
	Loose connection between E26 adapter and light base	Check the E26 adapter and light holder are well installed
	Loose connection on TP24 connector	Change the TP24 connector
	The voltage is too high and the product is damaged	Make sure the voltage is 120V
	None of the above	Reach out to our Customer Support
Dim	The wire falls off/loosens/breaks	Check the wires are well connected
	Incompatible dimmer	Check the dimmer model with the manual
	Not setting the dimmer right	Check dimmer settings
	Too many lights are connected to one dimmer	Reduce the number of lights connected to a dimmer (the total power of the lights should be less than 75% of the rated power of the dimmer)
	The brightness of lighting is too low	Install more lights 4inch: 2-4ft; 6inch: 5-7ft
	The brightness of lighting is too high	Turn down the dimmer or reduce the number of lights on at the same time
	Loose connection between E26 adapter and light base	Check the E26 adapter and light holder are well installed
Flickering	The light is not installed correctly	Check the installation of the light, to ensure that the springs and other parts are normal
	The wire falls off/loosens/breaks	Check the wires are well connected
	Incompatible dimmer	Check the dimmer model with the manual
	Not setting the dimmer right	Check dimmer settings
	Too many lights are connected to one dimmer	Reduce the number of lights connected to a dimmer (the total power of the lights should be less than 75% of the rated power of the dimmer)
	High-power electrical appliances on the same circuit	Reduce the number of lights light on the same time
	Voltage is too low	Check the line voltage to make sure the voltage is 120V
	Loose connection between E26 adapter and light base	Check the E26 adapter and light holder are well installed
	None of the above	Reach out to our Customer Support




DIMMER COMPATIBILITY GUIDE


Brand	Model	Star Rating
LUTRON	PD6WCL	★★★★☆
	MSCL-OP153M	★★★★☆
	CN-600P	★★★★☆
	DVCL-153P2.1	★★★★☆
	SCL-600P	★★★★☆
	SLV-600P	★★★★☆
	MACL-153M	★★★★☆
	DV-600P	★★★★☆
LEVATION	IPL06	★★★★☆
	DSL06	★★★★☆
	IPI06	★★★★☆
	6674	★★★★☆
	6631	★★★★☆



① Log into your Amazon.com account, click "Returns&Orders" on the top-right corner.

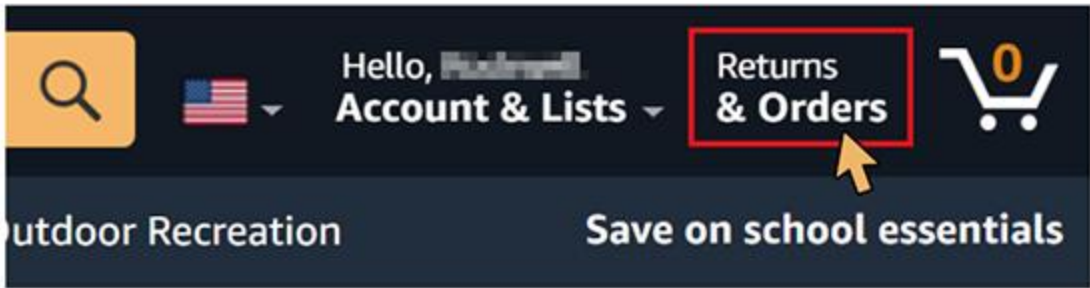


② Find your order in the list and click "View order details".

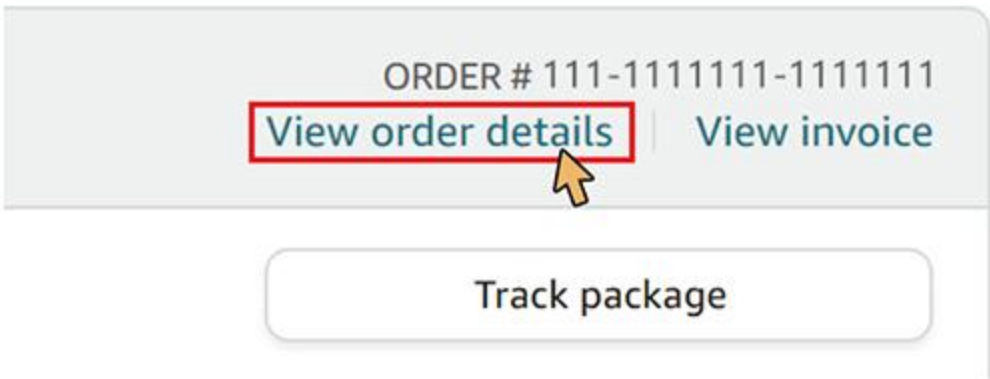

③ Click the "store name" following the Sold by, below the product title.

Delivered yesterday



Sold by:

Serial Numbers:

AZ: [redacted]

Return eligible through Sep 8, 2021

\$49.99



④ Click the yellow button "Ask a question", on the top-right corner, to contact the seller.

Livestreams

Outdoor Recreation

Save on school essentials

Have a question for [redacted]

Ask a question

rd of

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders. Or you can send your inquiry to our Official Customer Support at:

Call us:

+1(888)-676-1042

Monday - Friday from 9:00AM - 5:00PM (PT)

Contact via Email: support@amicolight.com



01

30-Day Return Policy

If you're not completely satisfied with your purchase, simply return the merchandise via Amazon Orders.

Unused merchandise can be refunded or exchanged within 30 days from the original purchase date.

02

5-Year Warranty

We guarantee your product is free from defects in product material and workmanship for five (5) years starting from the date of purchase during normal use of household conditions. If your appliance fails to operate properly within our warranty period, we will arrange a new replacement free of charge and cover all the shipping costs.

03

Quick Response within 12 Hours

If you are still unable to resolve the issue you are experiencing, please contact us immediately at our support email. It doesn't matter if the product has been installed, our customer support team will respond within 12 hours and assist you quickly and efficiently. The most efficient way to confirm your problem to us is to attach a video illustrating your product issue.



GET MORE SUPPORT

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders. Or you can send your inquiry to our Official Customer Support at:

✉ support@amicolight.com

☎ +1(888)-676-1042 Monday - Friday from 9:00AM - 5:00PM (PT)

MADE IN CHINA