

STEP 1

Remove all contents from carton.

(**NOTE:** Check for concealed damage - Notify Carrier of any damages immediately)

STEP 2

- Position sink (upside down) onto counter top surface at desired location. Trace outer edge of Self-Rim with pencil.

(**NOTE:** Ensure sink is parallel to counter edges. Procedure does not apply to DI-1-30, DI-1-5SP or DI-1-10SP. Refer to chart for Cut Out dimensions.)



<< CORRECT MARKING PROCEDURE

Pencil MUST be held straight as possible.


INCORRECT >> MARKING PROCEDURE



- Remove sink and draw a second line 3/8" parallel to the **inside** of the marked line - that will be the **CUT** line (As shown).

• **NOTE: BEFORE CUTTING COUNTER TOP, REFER TO THE CHART TO VERIFY CUTOUT DIMENSIONS!**

REMEMBER: MEASURE TWICE, CUT ONCE!



- Drill 1/4" hole 1 to the inside of cut line then use 1/2" drill bit to enlarge hole.
- Apply masking tape along outer (sink edge) line. This will prevent damaging countertop while cutting.
- Position jig saw blade into 1/2" hole and follow CUT LINE.

STEP 3

- Install Drain - Apply a bead of Plumber's Putty as shown.




1/4" continuous bead of Plumber's Putty.

Rubber Washer
Fiber Washer
Die Cast Nut

STEP 4

- Install Faucet (as shown).

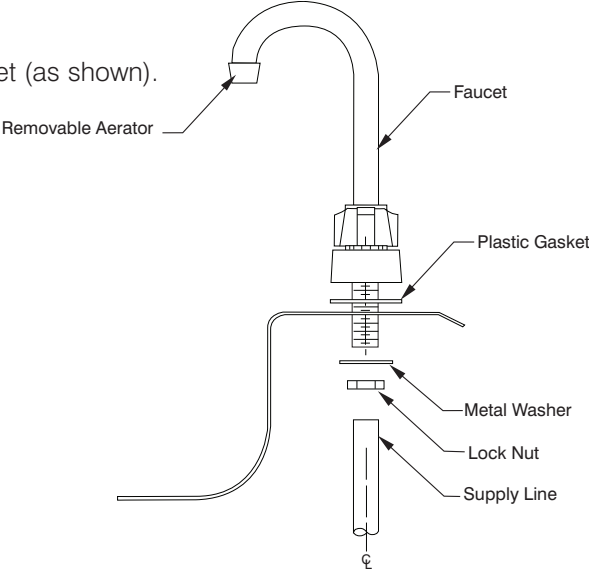

STEP 5

- Remove masking tape from counter surface and position sink into opening to ensure proper fit.



STEP 6

- Remove sink from opening and apply 1/4" bead sealant along edge of cut out.
- Install sink into counter top.
- Insert slotted end of screw thru clearance hole in clip and secure by turning Counter-Clockwise.

- Slide clip into end of Roll Form track (As Shown) and position where desired and hand tighten. Once all clips are in position, tighten with screwdriver -

DO NOT OVERTIGHTEN!

- Wipe excess Silicone from counter surface.



STEP 7

- Connect Drain and Faucet supply lines.



EDGEWOOD, NY 11717-8380

© ADVANCE TABCO, SEPTEMBER 2018



INSTALLATION INSTRUCTIONS for DROP-IN SINKS



CHECK FOR CONCEALED DAMAGE FILE CLAIM WITH FREIGHT CARRIER

Drop-ins manufactured by ADVANCE TABCO are designed and constructed for countertop installations. Only one compartment units intended for HAND SINK USE are NSF listed and approved. Suggested end use for drop-in sinks include dump sinks, bar sinks, wash sinks and hand sinks.

WARNING:

Equipment that includes a faucet may expose you to chemicals, including lead, that are known to the State of California to cause cancer or birth defects or other reproductive harm. For more Info, visit www.p65warnings.ca.gov.

This Carton Contains:

1 ea. Sink Bowl
Basket Type Drain sub assembly (See chart).
Faucet sub assembly (See chart).
Mounting Clips* (See chart).

*Standard mounting clips fit counters 7/8" to 2" thick. For narrower countertops, underside must be 'built up' (by others) to at least 7/8" thick. For thicker countertops, end user will need to supply their own longer mounting screws as needed.

TOOLS REQUIRED:

- Drill Motor
- 1/4" - 1/2" Drill Bits
- Long Shank Screw Driver
- Ruler or Tape Measure
- Pencil
- Adjustable Wrenches (2)
- Pipe Wrench
- Saber Saw or Jig Saw

MATERIAL REQUIRED:

- Silicone Sealant
- Plumbers Putty
- Masking Tape

RECOMMENDED SAFETY MATERIALS:

- Safety Glasses
- Work Gloves

NOTE:

The corners of ALL Cutouts are to have a **1-1/4"** Radius.



U Channel
Installation



LENGTH IS LEFT TO RIGHT

WIDTH IS FRONT TO BACK

	MODEL #	Bowl Dim. L x W x D	Overall Dim.	Cutout Size 1 1/4" Radius	Faucet	# Drains	# Clips	Ship Wt.
***	DBS-1	10" x 14" x 10"	13" x 19"	12 1/4" x 18 1/4"	1	1	8	11 lbs.
	DI-1-5	10" x 14" x 5"	13" x 19"	12 1/4" x 18 1/4"	1	1	8	9 lbs.
	DI-1-5SP	10" x 14" x 5"	13" x 19"	12 1/4" x 18 1/4"	1	1	4	13 lbs.
††	DI-1-9	9" x 9" x 3"	12" x 14"	11 1/4" x 13 1/4"	1	1	8	8 lbs.
	DI-1-10	10" x 14" x 10"	13" x 19"	12 1/4" x 18 1/4"	1	1	8	11 lbs.
	DI-1-10SP	10" x 14" x 10"	13 x 19"	12 1/4" x 18 1/4"	1	1	4	18 lbs.
	DI-1-1515	12-1/4" x 10"-1/4 x 6"	15 x 15"	14 1/4" x 14 1/4"	1	1	8	11 lbs.
	DI-1-25	9" x 9" x 5"	12" x 14"	11 1/4" x 13 1/4"	1	1	8	8 lbs.
	DI-1-30	14" x 10" x 5"	16" x 15"	15" x 14 1/4"	1	1	4	11 lbs.
	DI-1-35	14" x 10" x 5"	17" x 15"	16 1/4" x 14 1/4"	1	1	8	8 lbs.
	DI-1-168	16" x 14" x 8"	19" x 19"	18 1/4" x 18 1/4"	1	1	12	15 lbs.
*	DI-1-208	20" x 16" x 8"	23" x 21"	22 1/4" x 20 1/4"	1	1	12	29 lbs.
*	DI-1-2012	20" x 16" x 12"	23" x 21"	22 1/4" x 20 1/4"	1	1	12	25 lbs.
**	DI-1-2812	28" x 20" x 12"	31" x 25"	30 1/4" x 24 1/4"	1	1	12	42 lbs.
***	DBS-2	10" x 14" x 10"	25 1/2" x 19"	24 3/4" x 18 1/4"	1	2	12	20 lbs.
*	DI-2-10	10" x 14" x 10"	25 1/2" x 19"	24 3/4" x 18 1/4"	1	2	12	20 lbs.
*	DI-2-1410	14" x 16" x 10"	33 1/2" x 21"	32 3/4" x 20 1/4v	1	2	12	33 lbs.
*	DI-2-2012	20" x 16" x 12"	45 1/2" x 21"	44 3/4" x 20 1/4"	1	2	16	40 lbs.
*	DI-2-208	20" x 16" x 8"	45 1/2" x 21"	44 3/4" x 20 1/4"	1	2	16	29 lbs.
**	DBS-3	10" x 14" x 10"	38" x 19"	37 1/4" x 18 1/4"	1	3	16	32 lbs.
*	DI-3-10	10" x 14" x 10"	38" x 19"	37 1/4" x 18 1/4"	2	3	16	32 lbs.
*	DI-3-1410	16" x 14" x 10"	50" x 21"	49 1/4" x 20 1/4"	2	3	16	52 lbs.
**	DI-3-1612	16" x 20" x 12"	56" x 25"	55 1/4" x 24 1/4"	2	3	16	60 lbs.

ABOVE SINKS SUPPLIED WITH K-52 GOOSENECK FAUCET UNLESS NOTED.

†† SUPPLIED WITH WATER FILLER FAUCET & GRATING

*SUPPLIED WITH K-50 FAUCET **SUPPLIED WITH K-53 FAUCET WITH 12" SPOUT

***SUPPLIED WITH K-51 FAUCET WITH 6" SWING SPOUT

NOTE: DBS SERIES DRAINS ARE LOCATED AT THE LEFT REAR CORNER.
EACH BOWL INCLUDES 8 9/16" OVERFLOW PIPE WITH 1 1/2" IPS DRAIN.

U Channel
Installation



SMART SERIES™

LENGTH IS LEFT TO RIGHT

WIDTH IS FRONT TO BACK

MODEL #	Bowl Dim. L x W x D	Overall Dim.	Cutout Size 1 1/4" Radius	Faucet	# Drains	# Clips	Ship Wt.
S-1-1715-7	14" x 10" x 7 1/2"	17" x 15"	16 1/4" x 14 1/4"	1	1	8	12 lbs.
SS-1-1715-10	14" x 10" x 10"	17" x 15"	16 1/4" x 14 1/4"	1	1	8	14 lbs.
SS-1-1919-7	16" x 14" x 7 1/2"	19" x 19"	18 1/4" x 18 1/4"	1	1	12	16 lbs.
SS-1-1919-10	16" x 14" x 10"	19" x 19"	18 1/4" x 18 1/4"	1	1	12	18 lbs.
SS-1-1919-12	16" x 14" x 12"	19" x 19"	18 1/4" x 18 1/4"	1	1	12	20 lbs.
SS-1-2321-7	20" x 16" x 7 1/2"	23" x 21"	22 1/4" x 20 1/4"	1	1	12	20 lbs.
SS-1-2321-10	20" x 16" x 10"	23" x 21"	22 1/4" x 20 1/4"	1	1	12	22 lbs.
SS-1-2321-12	20" x 16" x 12"	23" x 21"	22 1/4" x 20 1/4"	1	1	12	25 lbs.
SS-2-3321-7	14" x 16" x 7 1/2"	33 1/2" x 21"	32 3/4" x 20 1/4"	1	2	12	33 lbs.
SS-2-3321-10	14" x 16" x 10"	33 1/2" x 21"	32 3/4" x 20 1/4"	1	2	12	35 lbs.
SS-2-3321-12	14" x 16" x 12"	33 1/2" x 21"	32 3/4" x 20 1/4"	1	2	12	37 lbs.
SS-2-4521-7	20" x 16" x 7 1/2"	45 1/2" x 21"	44 3/4" x 20 1/4"	1	2	12	38 lbs.
SS-2-4521-10	20" x 16" x 10"	45 1/2" x 21"	44 3/4" x 20 1/4"	1	2	12	39 lbs.
SS-2-4521-12	20" x 16" x 12"	45 1/2" x 21"	44 3/4" x 20 1/4"	1	2	16	40 lbs.

FAUCETS OPTIONAL

U Channel
Installation



Faucet &
Bubbler
Optional

SMART SERIES™ For the Classroom

LENGTH IS LEFT TO RIGHT

WIDTH IS FRONT TO BACK

MODEL #	Bowl Dim. L x W	O.A. Dim. L x W	Cutout Size 1 1/4" Radius	Faucet Holes Left Right	# Clips	Ship Weight
SCH-2317	16" x 14" x 7 1/2"	23" x 17"	22 1/4" x 16 1/4"	1 1	8	16 lbs.
SCH-1-2517L	16" x 14" x 7 1/2"	25" x 17"	24 1/4" x 16 1/4"	3 1	12	18 lbs.
SCH-1-2517R	16" x 14" x 7 1/2"	25" x 17"	24 1/4" x 16 1/4"	1 3	12	18 lbs.

FAUCETS OPTIONAL