

INSTALLATION INSTRUCTIONS

CETMTM-0110



Notes

Read this instruction carefully before starting installation.

Proper tools will improve the quality of installation and reduce the time required.

All mirrors are asymmetrical design for better view range.

For vehicles without factory heat and signal light functions require an additional wiring.

Power fold/Memory/Auto-Dimming functions are not available.


If missing parts or any damage found, please take a picture and contact us.

Reference the vehicle owner's manual to adjust the new mirrors.

INSTALLATION INSTRUCTIONS

Step 1:

1. Open the front door to remove the upper extension triangular trim panel.
2. Remove the door lock lever and the door handle trim.
3. Remove (2) cap covers on door trim panel.
4. Remove (2) 7mm bolts and (1) T20 screw on door trim panel.
5. Carefully pull the door trim panel up and release door trim panel.
6. Disconnect the mirror harness plugs.
7. Pull up the lock lever up and remove door switch harness plug.
8. Remove the door trim panel.

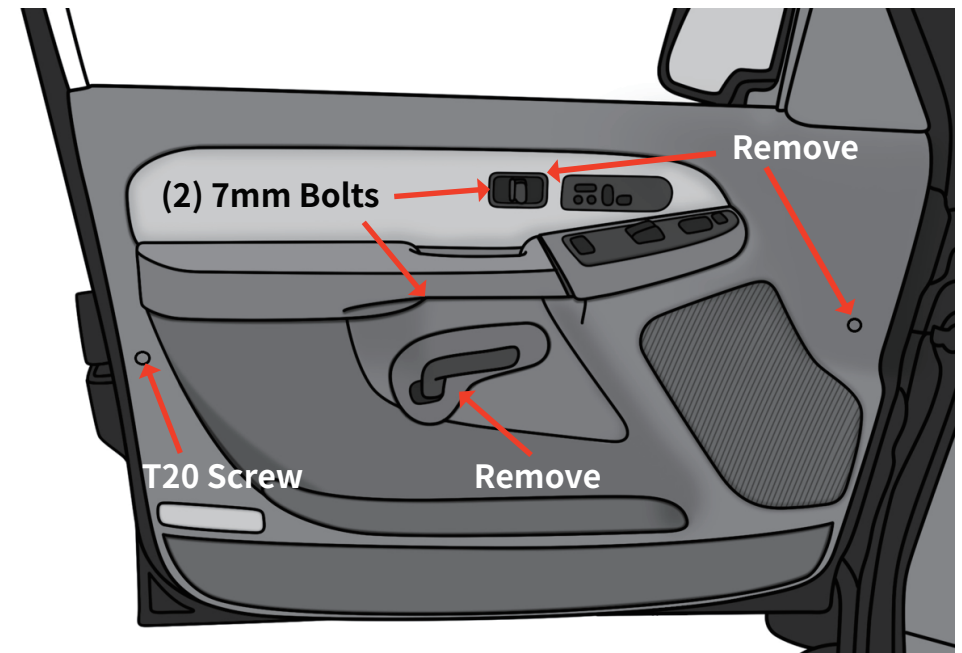

INSTALLATION INSTRUCTIONS

Step 2:

1. Remove the foam pad from door sheet panel.
2. Remove (3) 10mm hex nuts securing the factory mirror.
3. Carefully remove the factory mirror.

Step 3:

1. Take the new mirror, feed studs and harness through the existed holes on door panel.
2. Install (3) provided hex nuts to secure the new mirror. Torque to **80 lb in.**

Step 4:


1. Take the door trim panel, and connect mirror harness and door switch harness. Push down the lock lever to secure the door switch harness.
2. Reinstall the door trim panel back to position.
3. Secure the door trim panel using (2) 7mm bolts and (1) T20 screw.
5. Reinstall door lock lever and door handle trim.
6. Reinstall (2) cap covers.
7. Insert the foam pad into the door sheet and reinstall the upper extension triangular trim panel.

Step 5:

1. Repeat above steps on the passenger side.
2. Carefully check all mirrors functions before first drive.
3. For vehicles with memory and tilt functions please disable functions on vehicle's driver information center.


INSTALLATION INSTRUCTIONS

Reference Wire Diagram:

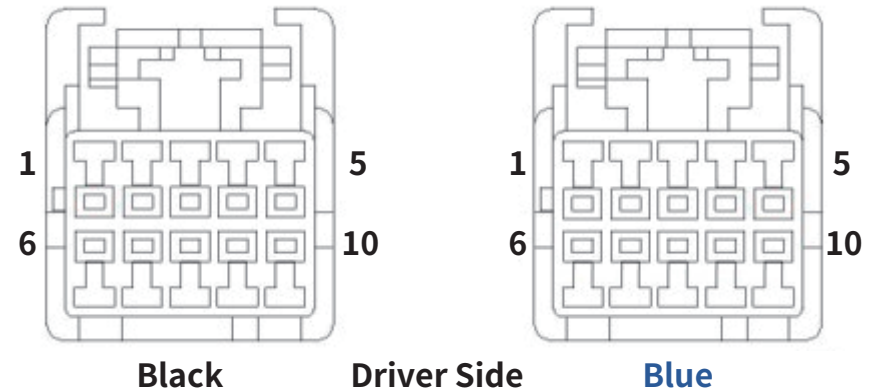

1: Signal Ground
2-10: Not Used

1-3: Not Used
4/5/10: Mirror Motor
6: Signal Light
7: Not Used
8-9: Mirror Heater

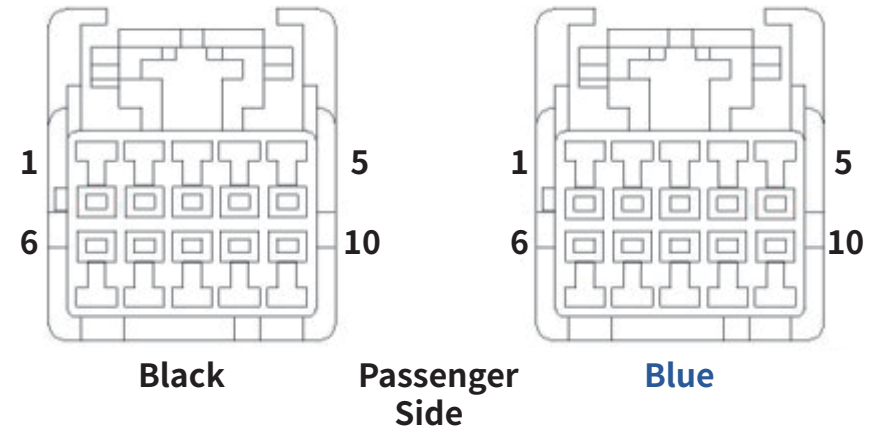

1-3: Not Used
4: Mirror Heater
5-6: Not Used
7-9: Mirror Motor
10: Not Used

1-2: Not Used
3: Mirror Heater
4: Signal Light
5: Signal Ground
6-10: Not Used